

PURCHASER	P.O. #	DATE
PROJECT	LOCATION	
ENGINEER	ARCHITECT	
SUBMITTED BY	FOR APPROVAL	FOR REFERENCE

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

Features

- 115V Single Zone Heat Pump
- Precision Inverter® technology (variable speed compressor)
- Soft start compressor
- BLDC motor
- High efficiency for low operating cost
- DiamonBlue Advanced Corrosion Protection®
- Auto Clean indoor coil
- Cooling/Heating/Fan/Auto mode
- Surge Cool/Heat
- Natural air flow
- Ultra quiet operation
- Sleep mode
- Auto restart
- Auto changeover
- 24-hour on/off timer
- ENERGY STAR® qualified model

OPERATION IN EXTREME CONDITIONS

- Low ambient operation down to 5° F (Cooling mode)
- Low ambient operation down to -4° F (Heating mode)
- Low temperature compressor start-up protection



Built-in Wi-Fi for control anytime, anywhere

- Easy to use FriedrichGo™ app
- Create customizable, 7-day schedules
- Control with smartphone
- Compatible with Amazon Alexa and Google Home



WIRELESS
REMOTE CONTROL



SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone - 115 Volt Heat Pumps		Single Zone - 230/208 Volt Heat Pumps	
SYSTEM MODEL NO.		FPHW091A	FPHW121A	FPHW093A	FPHW123A
INDOOR MODEL		FPHSW09A1B	FPHSW12A1B	FPHFW09A3B	FPHFW12A3B
OUTDOOR MODEL		FPHSR09A1A	FPHSR12A1A	FPHSR09A3A	FPHSR12A3A
SPECIFICATIONS					
CAPACITY COOLING (RATED)	Btu	9000	12000	9000	12000
CAPACITY COOLING MIN - MAX	Btu	3600-10000	4000-13500	3600-10000	4000-13500
CAPACITY HEATING (RATED) @ 47°F	Btu	9500	13000	9500	13000
CAPACITY HEATING (RATED) @ 17°F	Btu	5000	7500	5000	7500
CAPACITY HEATING MIN - MAX	Btu	3600-10500	4000-14000	3600-10500	4000-14000
SENSIBLE HEAT RATIO		76%	77%	76%	77%
COP		3.56	3.46	3.88	3.42
HSPF/HSPF2		10.0/8.5	10.5/9.0	10.7/8.5	10.5/9.0
SEER/SEER2		19.5/18.5	22.0/21.7	22.5/22.0	22.0/21.0
EER		12.8	12.5	13.7	12.5
ENERGY STAR		YES	YES	YES	YES
MOISTURE REMOVAL	Pts/h	1.9	2.5	1.9	2.5
AIRFLOW (HIGH/MED/LOW/QUIET)	CFM	424/382/323/247	424/382/323/247	424/382/323/247	424/382/323/247
SOUND RATING - INDOOR (HIGH/MED/LOW/QUIET)	dB-A	39/32/29/26	39/32/29/26	39/32/29/26	39/32/29/26
SOUND RATING - OUTDOOR	dB-A	53	53	53	53
OPERATING RANGE (HEATING)	°F	[-4° - 75°]	[-4° - 75°]	[-4° - 75°]	[-4° - 75°]
OPERATING RANGE (COOLING)	°F	[5° - 115°]	[5° - 115°]	[5° - 115°]	[5° - 115°]
EST. YEARLY OPERATING COST	U.S. \$	\$61	\$72	\$53	\$83
ELECTRICAL DATA					
POWER SOURCE	V-Hz-Phase	115-60-1	115-60-1	230/208-60-1	230/208-60-1
MIN. AMPACITY	A	13.5	16.5	10	10
COOLING WATTS	W	700	950	655	960
COOLING AMPS		6.3	8.3	2.9	4.3
HEATING WATTS	W	780	1100	720	1110
HEATING AMPS		7.0	9.7	3.1	5.0
MAX. TD FUSE/BREAKER	A	20	25	15	15
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14AWG	4 x 14AWG	4 x 14AWG	4 x 14AWG
REFRIGERATION SYSTEM					
REFRIGERANT		R410a	R410a	R410a	R410a
COMPRESSOR TYPE		Rotary	Rotary	Rotary	Rotary
CONNECTIONS		Flare	Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8	3/8	3/8
REFRIGERANT CHARGE	oz.	33.5	40.9	33.5	40.9
FACTORY PRECHARGE	ft.	25	25	25	25
MIN. / MAX. LINE LENGTH	ft	9.8-50	9.8-50	9.8-50	9.8-50
MAX. HEIGHT DIFFERENCE	ft	33	33	33	33
DIMENSIONS & WEIGHT					
INDOOR UNIT					
W x H x D	in	33 7/8 x 11 1/8 x 8 1/2		33 7/8 x 11 1/8 x 8 1/2	
NET WEIGHT	lbs	20	20	20	20
SHIPPING WEIGHT	lbs	24.25	24.25	24.25	24.25
OUTDOOR UNIT					
W x H x D	in	28 1/8 x 19 x 9 1/2	31 7/8 x 23 x 11	28 1/8 x 19 x 9 1/2	31 7/8 x 23 x 11
NET WEIGHT	lbs	65	78	59.5	72.5
SHIPPING WEIGHT	lbs	68	82.5	65	79
TOTAL NET WEIGHT	lbs	85	98	79.5	92.5
TOTAL SHIPPING WEIGHT	lbs	92.25	106.75	89.25	103.25


Due to continuing research in new energy-saving technology, specifications are subject to change without notice. Your energy costs will depend on your utility rates and use. The estimated energy cost is based on an electricity cost of \$.13 per kWh. For more information, visit www.ftc.gov/energy.



DIMENSIONAL DRAWINGS


INDOOR UNIT / FPHSW09A1B, FPHSW09A3B

	W	H	D
FPHSW09A1B	33 7/8"	11 3/16"	8 1/2"
FPHSW09A3B			

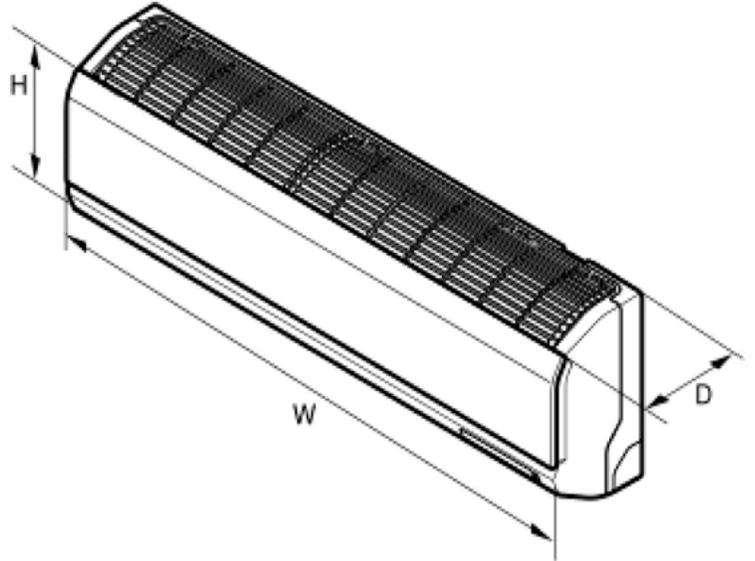

INDOOR UNIT / FPHSW12A1B, FPHSW12A3B


	W	H	D
FPHSW12A1B	33 7/8"	11 3/16"	8 1/2"
FPHSW12A3B			

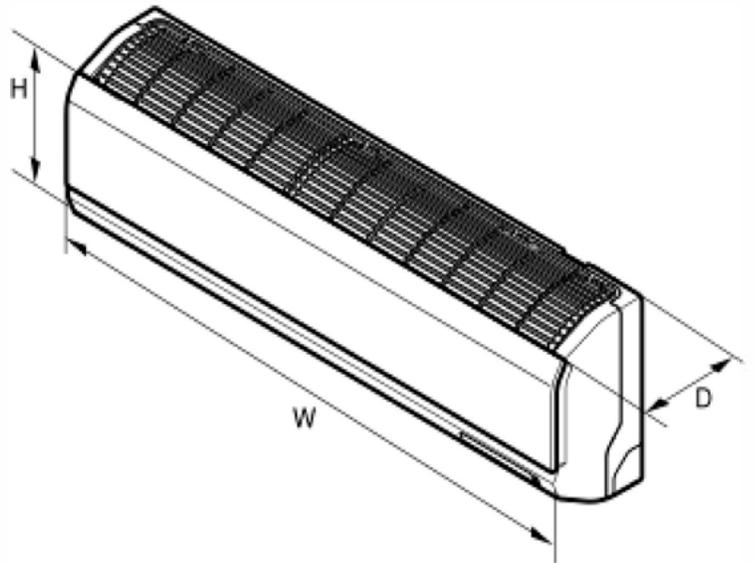

DIMENSIONAL DRAWINGS

OUTDOOR UNITS / FPHSR09A1A, FPHSR09A3A, FPSHR12A1A, FPSHR12A3A

Outdoor units:

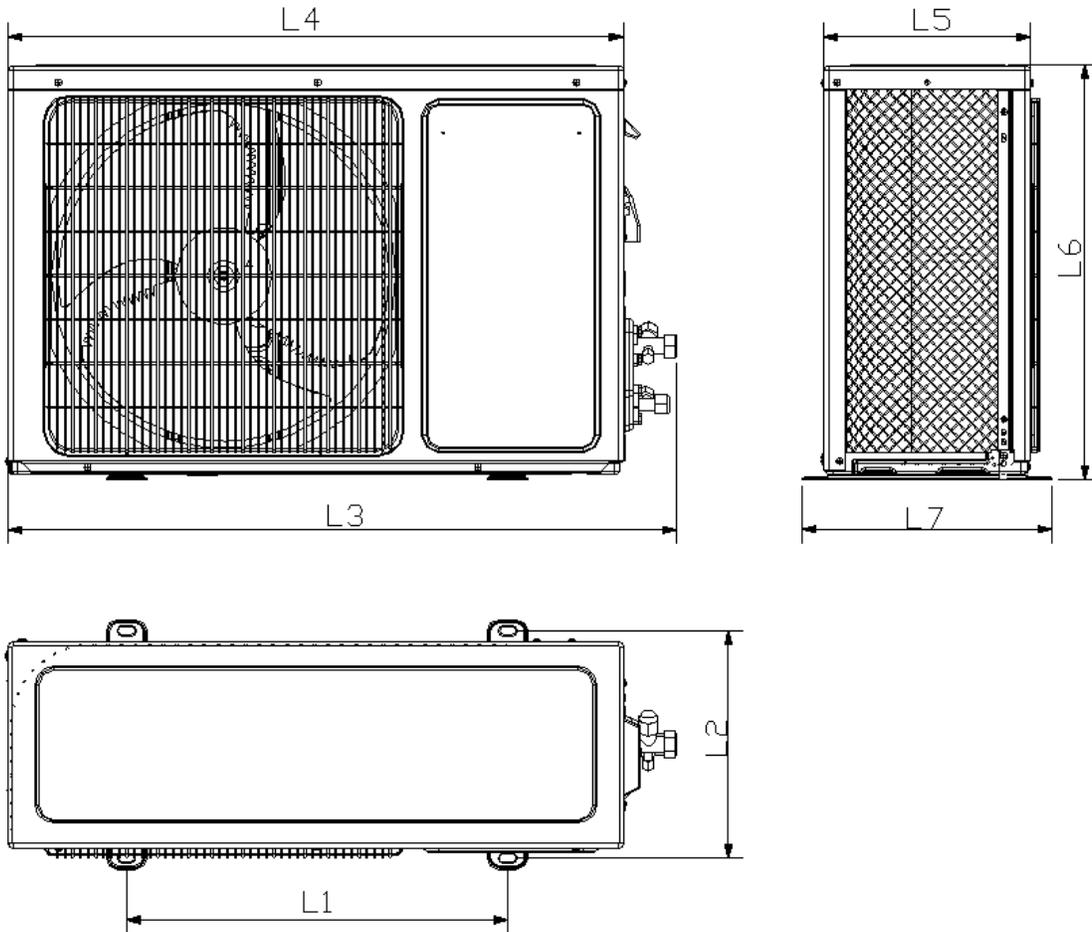

				Width	Depth	Height	
Model	L1 (in.)	L2 (in.)	L3 (in.)	L4 (in.)	L5 (in.)	L6 (in.)	L7 (in.)
FPHSR09A1A	17 7/16	10 3/8	30 9/16	28 1/8	9 7/16	19	11 13/32
FPHSR12A1A	20 1/16	12 19/32	34 7/8	31 7/8	11	23	13

ACCESSORIES

REFRIGERATION LINE SETS* (Required accessory)

System	Lineset Kit	Lineset Kit	Liquid	Suction
FPHW091A, FPHW093A	T32150 - 15'	T32350 - 35'	1/4"	3/8"
FPHW121A, FPHW123A	T32150 - 15'	T32350 - 35'	1/4"	3/8"

*Insulated line sets are available for Friedrich split systems in 15 ft. and 35 ft. lengths. Each line set is equipped with flare nuts on both ends. Both liquid and suction lines are insulated. Line sets can be joined together with field supplied double male connectors. Each system requires one line set for each indoor unit installed.

REFRIGERATION LINE SETS MIN./MAX. LENGTHS

Floating Air® Pro		
System Model	Min. (ft.)	Max. (ft.)
FPHW091A, FPHW093A	10	50
FPHW121A, FPHW123A	10	50

TORQUE WRENCH SETTINGS

Outside Diameter		Torque	
mm	inch	ft.-lbs.	N·m
6.35	1/4	13 - 18	17.6 - 24.5
9.52	3/8	25 - 30	33.3 - 41.2
12.7	1/2	40 - 47	53.9 - 64.7
15.88	5/8	45 - 59	61.7 - 80.4

WALL CONTROLLERS



FPWC1



DSSXEMWRT3

FPWC1- Optional wired wall controller for Floating Air Premier single zone, and Floating Air® Pro, single and multi zone models. Does not work with FPHSW36A3C at this time. Please check with your Friedrich representative for options.

DSSXEMWRT3- Optional wireless energy management thermostat with occupancy sensor. For Floating Air® Pro, single and multi zone models.

FreshAir® IAQ READY

Introducing Friedrich FreshAir® IAQ.

Proven solutions that improve the health and quality of indoor air, and ease customer concerns about the air they breathe. Easy-to-install FreshAir IAQ accessories improve the health and quality of indoor air.

AIR PURIFICATION

FreshAir® Purifier APWM1

FreshAir Purifier by iWave® features needlepoint bi-polar ionization to address any mold, bacteria, virus, allergens, and VOC's that may be in your air stream to ensure delivery of healthy, clean, purified air. Optional accessory for all Friedrich wall-mounted ductless models.



ULTRAVIOLET LED

Friedrich UV UVL1

Germicidal UV light kits have been tested and certified for use on Friedrich products. The UV kit can be installed on the indoor coil and is designed to disinfect surfaces and the air as it circulates through the ventilation system. UV light can kill airborne bacteria, viruses, mold, reduce maintenance costs and extend the life of an HVAC system. Optional accessory for all Friedrich wall-mounted ductless models.

