

1883

PROJECT NAME LOCATION ARCHITECT ENGINEER	
CONTRACTOR	
SUBMITTED BY	
	NIT SUMMARY
Quantity	
Unit Designation	
Model No.	
Total Cooling	
Sensible Cooling	
Air Ent. Evaporator	
Air Lvg. Evaporator	
Heating Input	
Heating Output	
CFM/ESP	
EER/SEER	
Electrical	
Minimum Ampacity	
MinMax. Breaker	
Net Unit Weight	
Accessory	
Catalog Form Number	
ACCESSORIES:	NOTES:

FRA15AZ iM Air Conditioner

Cooling Efficiencies up to: 15.2 SEER2/9.8 EER2

Nominal Sizes: 2 to 5 Ton [6.68 to 16.3 kW]

140111111a1 012031 2 to 0 10	
JOB NAME	LOCATION
CONTRACTOR	ORDER NO
ENGINEER	UNIT MODEL NO
	☐ RECORD COIL MODEL NO
DATE	AIR HANDLER MODEL NO
UNIT DATA	\$5.84.6p
COOLING PERFORMANCE	EcoNet® The product meets a strongert set of our improved frends a strongert set of our improved frends and strongert s
EFFICIENCYSEER	FEATURES
TOTAL CAPACITY* MBH [kW]	EcoNet® Enabled: Automatic system configuration and optimization
SENSIBLE CAPACITY* MBH [kW]	PlusOne® Diagnostics & Bluetooth®1 Connectivity: With the Contractor Tablet® Applications and the contractor
OUTDOOR DESIGN TEMP °F [°C] DB	& EcoNet® Apps, built-in technology makes advanced set-up, monitoring, troubleshooting and repairing the product easier than ever before
TEMP. OF AIR ENTERING EVAPORATOR COIL	PlusOne® Variable Speed Twin Rotary Compressor & Inverter Drive: — Features Inverter operation from 40 to 70% capacity or 100% capacity via line voltage with the EcoNet® Smart Thermostat
POWER INPUT REQUIREMENTkW	- 3-speed operation when installed with a 24V two-stage thermostat
(*uses blower motor heat)	 Provides precise temperature control, advanced humidity control and greater efficiency
HEATING PERFORMANCE	Swept Wing Fan Technology: Features quieter operation and improved unit acoustics
EFFICIENCY HSPF	7mm Condenser Copper Coil: Requires less refrigerant allowing for a smaller and lighter footprint while enhancing reliability
TOTAL CAPACITY* MBH [kW]	PlusOne® Expanded Value Space: 3 in. – 4 in. – 5 in. service valve space— provides a minimum working area of 27-square inches for easier access
OUTDOOR DESIGN TEMP °F [°C] DB	PlusOne® Triple Service Access: 15 in. wide, industry leading corner service
TEMP. OF AIR ENTERING EVAPORATOR COIL °F [°C] DB	access, two fastener, removeable corner and individual louver panels-makes repairs easier and faster
SUPPLY AIR BLOWER PERFORMANCE	
	ACCESSORIES/OPTIONS
TOTAL AIR SUPPLY CFM [L/s]	Compressor Crankcase Heater
TOTAL RESISTANCE EXTERNAL TO UNITIWG	Low Ambient Control
BLOWER SPEED RPM	Compressor Sound Cover
POWER OUTPUT REQUIREMENT BHP	Low Pressure Control
MOTOR RATING HP [W]	High Pressure Control
POWER INPUT REQUIREMENT kW	Liquid Line Solenoid (24 VAC, 50/60 Hz)
ELECTRICAL DATA	Liquid Line Solenoid (120/240 VAC, 50/60 Hz)
POWER SUPPLY Hz	
TOTAL UNIT AMPACITY AMPS	

¹The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rheem® is under license. Other trademarks and trade names are those of their respective owners.



AMPS








CLEARANCES

MINIMUM WIRE SIZE......

MAXIMUM OVERCURRENT DEVICE
FUSES/HACR BREAKER......

ACCESS SIDE	24" [609.6 mm]
AIR INLETS	12" [304.8 mm]
ABOVE UNIT	60" [1524 mm]

FRA15AZ

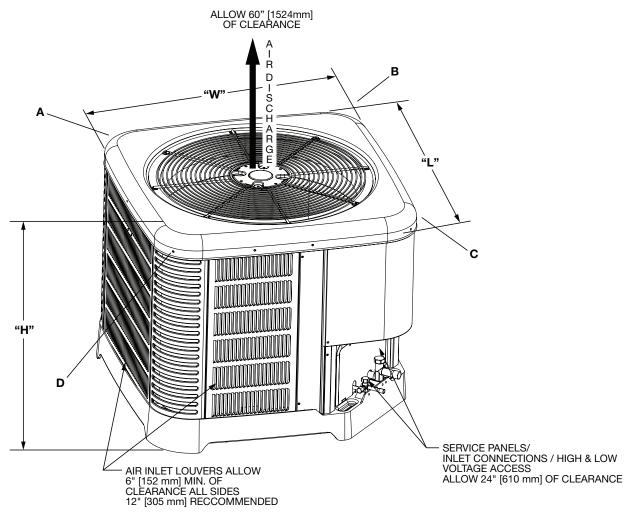

ST-A1348-01-00

Unit Dimensions

Model No.	Operating					Shipping						
	H (Height)		L (Length)		W (Width)		H (Height)		L (Length)		W (Width)	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
FRA15AZ24AJ3	27.00	686	29.75	756	29.75	756	28.50	724	32.38	822	32.38	822
FRA15AZ36AJ3	27.00	686	33.75	857	33.75	857	28.50	724	36.38	924	36.38	924
FRA15AZ48AJ3	31.00	787	33.75	857	33.75	857	32.50	826	36.38	924	36.38	924
FRA15AZ60AJ3	31.00	787	35.75	908	35.75	908	32.50	826	38.38	975	38.38	975

[] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc. 5600 Old Greenwood Road Fort Smith, Arkansas 72908

© 2023 Rheem Manufacturing Company. Friedrich trademarks owned by Rheem Manufacturing Company.

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."

PRINTED IN U.S.A. 8-23 QG FORM NO. XFR-1603