

ENGINEERED FOR THE WORLD'S TOUGHEST ENVIRONMENTS



HAZARDGARD® AIR CONDITIONERS

50 HZ | 60 HZ

UL LISTED for CLASS 1, DIV 2,
GROUPS A, B, C and D

CERTIFIED in accordance with ISA 12.12.01 and
NFPA 70 (NATIONAL ELECTRIC CODE), ANSI/UL
484 Room Air Conditioners
KSA registered model tested in accordance with
SASO 2681

 **FRIEDRICH**
DELIVERING BOLDLY CRAFTED COMFORT



HCM R32 Models Only

Hazardgard® meets T4 temperature classification

Unit surface temperatures will not rise above 135°C/275°F.
Operates at low ambient conditions without freezing at outdoor ambient temperatures as low as 7°C/45°F.
Tolerates higher outdoor temperatures up to 55°C /130°F.



The Friedrich Advantage

RELIABLE DESIGN BACKED BY ROBUST ENGINEERING

For almost 40 years, industrial professionals have trusted Hazardgard® to deliver safe and reliable cooling in the most extreme conditions. Hazardgard® is specifically designed to cool laboratories, control rooms, living quarters, storage areas and other enclosures situated in hazardous locations; where specific volatile flammable liquids or gases are handled or used within enclosed containers or systems.



Quality

Friedrich is an established player in the air conditioning industry and known for manufacturing quality products.



Product Reliability

Used across the globe, Hazardgard® is a tested and reliable product and not quick-fix, job shop alteration.




Durability

Robust engineering, commercial grade components and extensive field testing provide the durability and safety required in hazardous locations.



Availability

Off the shelf models allow for efficient manufacturing, shorter lead times and standardized component parts.

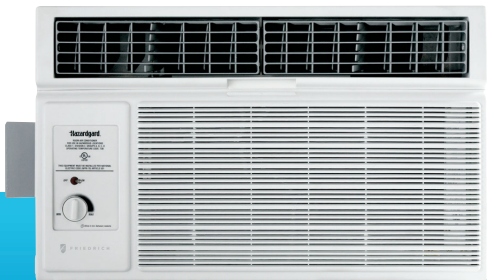

HAZARDGARD® IS RATED FOR THESE CONDITIONS:


Model	Hazardous Location Classification: Gases
SH15M30A HCS15A30A HCM20A30A SH20M30SA HCM24A30A SH20M50B HCM20A50A	National Electrical Code, NFPA 70 ARTICLE 501: Class 1, Division 2, Group A / B / C / D , Temperature Class T4 ARTICLE 505: Class 1, Zone 2, Group II C / II B / II A , Temperature Class T4



For global applications, Hazardgard® cooling capacities are tested in a certified laboratory at moderate (T1*) and hot (T3*) climate conditions in accordance with SASO (Saudi Arabian Standards Organization) Standard 2681. SASO Standard 2681 is adopted from ISO Standard 5151 for testing and rating for performance of non-ducted air conditioners and heat pumps. Model SH20M30SA is KSA Registered in accordance with SASO2681 and meets SASO 2663 Energy Efficiency standard.

Durability & Reliability

- Permanent split capacitor motor
- Hermetically sealed refrigeration system
- Environmentally sealed on/off switch and gold plated contacts in thermostat for corrosion resistance
- Solid-state control relays for compressor and fan operation
- Commercial grade, enclosed fan motor with hermetically sealed overload for arc-free operation
- Direct-wired (field supplied), 15-amp circuit with time delay fuse that will tolerate current surge without tripping the breaker
- Powder Coated 22-gauge, G60 steel air conditioner cabinet for corrosion protection and to withstand years of hard use
- Stainless steel fan shaft



Performance in Extreme Conditions

- Hot gas bypass for cooling operation at low ambient temperatures, down to 45°F / 7°C without freezing
- Designed to tolerate high ambient temperatures, allowing units to operate in T3 conditions

Coated Coils for Corrosion Resistance

- ElectroFin® 5-stage, immersion ecoat process, or Diamonblue™ Advanced Corrosion Protection on 100% of metallic surfaces on the outdoor coil provides outstanding corrosion resistance protection and extends the life of the unit, especially in coastal or corrosive environments.

Diamonblue™ Advanced Corrosion Protection

- STANDARD ON ALL MODELS (except HCM24A30A, see below)
- Anti-corrosive, hydrophilic coating



ElectroFin® 5-stage, Immersion Ecoat Benefits:

MODEL HCM24A30A ONLY

- Excellent adhesion characteristics
- Less than 1% thermal degradation
- Outstanding chemical resistance
- Passed 6048 hrs. ASTM B-117 Salt Spray

5-STAGE ECOAT Corrosion Protection



MEETS THE FOLLOWING:

- MIL-C-46168 Chemical Agent Resistance -DS2, HCl Gas
- CID A-A-52474A (GSA)
- MIL-STD 810F, Method 509.4 (Sand and Dust)
- MIL-P-53084 (ME)-TACOM Approval
- MIL-DTL-12468 Decontamination Agent (STB)
- DPG (Douglas Proving Grounds) Soil & Water Exposure Tests
- GM9540P-97 Accelerated Corrosion Test (120 cycles)
- ASTM B117-G85 Modified Salt Spray (Fog) Testing-2,000 hours
- ASTM B117 Salt Spray (tested by ARL for Lockheed Martin)



Trusted to perform in these applications

- Offshore oil rigs, on-shore oil company offices and refineries
- Petrochemical sites
- Propane fill-up stations
- Paint and varnish storage or processing plants
- Grain alcohol processors or storage sites
- Plant areas using strong solvents or chemicals
- Munitions plants or armories
- PVC or plastics plants and processing points
- Recycling plants
- Furniture refinishing workshops
- Office complexes where methane is a by-product
- Hazardous materials storage

SPECIFICATIONS

Model	Cooling Capacity Btu/Hr.	Electrical Characteristics			Circuit Rating Breaker or T - D Fuse	Energy Efficiency Ratio EER	Moisture Removal Pints/ Hr	Air Circulation CFM	Refrigerant
		Volts Rated	Cooling Amps	Cooling Capacity (KW)					
		Volts - Amps							
60 HERTZ									
SH15M30A	15,700/15,700	230/208	7.9/7.8	4.60/4.10	250V-15	9.7/9.7	4.0	375	R-410A
HCS15A30A	15,000	230/208	7.0/7.3	4.4	250V-15	10.2	5.0	375	R-32
HCM20A30A	20,000	230/208	10.0/10.7	5.86	250V-20	10.0	7.5	375	R-32
SH20M30SA	19,000/19,000	220	8.5	5.57	250V-20 (230V) / 250V-20 (208V)	9.7/9.6	5.5	375	R-410A
HCM24A30A	23,000	230/208	10.9/11.9	6.74	250V-25	9.9	8.8	385	R-32
50 HERTZ									
SH20M50B	21,000/19,100	240/220	11.6/10.3	6.15/6.15	250V-15	8.8/8.8	7.0/7.0	425	R-410A
HCM20A50A	21,000	240/220	10.3/10.6	6.15	250V-25	9.5	7.5	425	R-32

INSTALLATION INFORMATION

Model	Dimensions Inches						Window Width Inches		In-Wall Installation Finished Hole Inches			Weight Lbs.	
	Height	A Width	Depth with Front	Depth J Box to Louvers B	Minimum Extension Into Room	Minimum Extension Outside	Min.	Max.	Height	Width	C Max. Depth	Net	Shipping
SH15M30A	15 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	16 3/16"	26 3/16"	6"	140	167
HCS15A30A	15 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	16 3/16"	26 3/16"	6"	140	167
HCM20A30A	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	151	178
SH20M30SA	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	166	170
HCM24A30A	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	151	178
SH20M50B	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	171	175
HCM20A50A	17 15/16"	25 15/16"	27 3/8"	6"	3 1/16"	16 15/16"	27 7/8"	42"	18 3/16"	26 3/16"	6"	151	178


Due to continuing engineering research and technology, specifications are subject to change without notice.

U.S. MAXIMUM outdoor ambient operating temperature is 115°F. (46°C) MAXIMUM TEMPERATURE RATING FOR CLASS 1, DIVISION 2, GROUPS A, B, C, D.

Capacity and efficiency values at each climate conditions are available upon request.

NOTE: Hazardgard unit must be hard-wired.

Manufactured under Design Patent DES 368, 306 decorative front; Utility Patent 5, 662, 058.

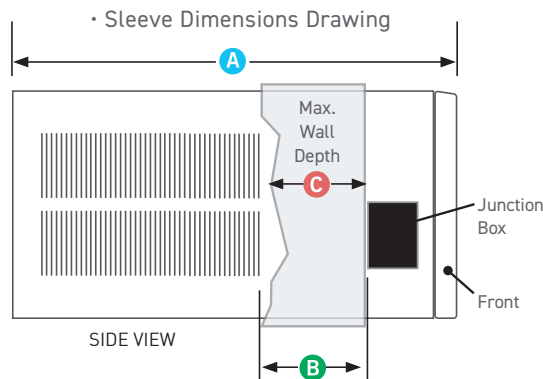

Friedrich Air Conditioning Co. | Friedrich.com

BR_HAZ_REV 08-18-25



HCM R32 Models Only