







PURCHASER	P.O. #	DATE
PROJECT	LOCATION	
ENGINEER	ARCHITECT	
SUBMITTED BY	FOR APPROVAL	FOR REFERENCE

ITEM	PLAN DESIGNATION	QUANTITY	COOLING BTU/H	VOLTAGE	FRIEDRICH MODEL

#### Key Features

 Indicates sustainability feature

- **FastPro®** design for the fastest access for maintenance of any wall-mounted ductless systems
-  ENERGY STAR® certified models available\*
-  **Precision Inverter®** technology (variable speed compressor)
-  Soft-Start™ compressor
-  BLDC motor
-  Built-in Wi-Fi
-  Sleep mode
- Ultra quiet operation
- Easy-to-read temperature display
- Wireless remote control included
- Efficiencies of up to 21.0 SEER2

#### FEATURING OUR **FastPro®** DESIGN

##### 115 VOLT MODELS:



FAHSW09A1C, FAHSW12A1C

##### 208/230 VOLT MODELS:




FAHFW18A3D, FAHFW24A3D



FAHSW36A3D  
(FastPro® not available on this model)



FSHSR09B1C, FSHSR12B1C

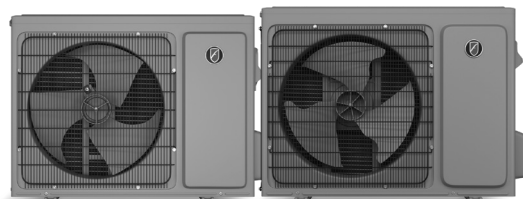

FSHSR18B3D, FSHSR24B3D



FSHSR36B3D


# FLOATING AIR™ SELECT SELECT | SINGLE-ZONE | WALL-MOUNTED HEAT PUMPS

MODEL	Model Set	Unit	FSHW091C	FSHW121C	FSHW183D	FSHW243D	FSHW363D
	Indoor Model		FAHSW09A1C	FAHSW12A1C	FAHFW18A3D	FAHFW24A3D	FAHSW36A3D
	Outdoor Model		FSHSR09B1C	FSHSR12B1C	FSHSR18B3D	FSHSR24B3D	FSHSR36B3D
	Power Supply		115V~, 60Hz, 1P			208V/230V~, 60Hz, 1P	
COOLING	ENERGY STAR® Standard	Y/N	Y	N	Y	N	N
	ENERGY STAR – Cold Climate	Y/N	N	N	N	N	N
	Rated Capacity @ 95°F	Btu/h	9,000	12,000	18,000	24,000	34,600
	Cooling Capacity Range (Min.–Max.)	Btu/h	3,600–10,000	4,000–13,000	6,500–19,000	8,000–25,000	9,300–36,000
	EER2 @ 95°F	Btu/h/W	12.50	10.20	12.00	10.60	9.50
HEATING	SEER2	Btu/h/W	20.00	18.00	21.00	19.50	20.00
	Cooling Operating Range	°F	5–118	5–118	5–118	5–118	5–118
	Rated Capacity @ 47°F	Btu/h	9,500	12,000	18,000	24,000	35,000
	Heating Capacity Range (Min.–Max.)	Btu/h	3,600–10,000	4,000–13,000	6,500–19,000	8,000–25,000	9,600–37,500
	COP @ 47°F	W/W	4.10	3.40	3.91	3.30	3.25
	COP @ 5°F	W/W	2.00	1.90	2.40	1.90	1.95
	HSPF2	Btu/h/W	9.00	8.50	9.80	8.50	8.40
	Rated Capacity Heating @ 17°F (-8.3°C)	Btu/h	6,800	8,800	14,800	21,000	19,200
INDOOR AIRFLOW	Maximum Heating Capacity @ 5°F (-15°C)	Btu/h	6,000	7,500	15,000	18,500	20,000
	Heating Operating Range	°F	-5–75	-5–75	-5–75	-5–75	-5–75
	Air Circulation (Max./H/M/L)	ft³ CFM	382/341/294/247	394/365/312/253	647/588/482/382	706/647/559/441	1,059/1,018/883/712
INDOOR FAN MOTOR	Sound Rating – Indoor (Max./H/M/L/Quiet)	dB(A)	42/39/37/35/32	42/39/37/35/32	48/45/41/39/36	50/48/43/41/39	52/48/43/39/38
	Output	W	46	46	35	35	70
OUTDOOR AIRFLOW	Speed (High/Med/Low)	r/min	1,100/940/800	1,154/992/800	1,100/960/800	1,200/1,040/880	1,060/930/810
	Air Circulation (High) for Outdoor	ft³ CFM	1,295	1,295	1,471	1,942	2,590
OUTDOOR FAN MOTOR	Sound Rating – Outdoor	dB(A)	53.0	53.0	56.0	60.0	60.0
	Output	W	36	36	60	102	102
ELECTRICAL	Speed (High)	r/min	850	880	840	880	900
	Rated Current	Cooling (A)	6.7	10.7	6.4	10.0	16.0
		Cooling (W)	720	1,176	1,506	2,264	3,660
		Heating (A)	6.2	9.6	8.1	9.5	14.2
		Heating (W)	679	1,034	1,349	2,132	3,160
	MOP (Rating of Overcurrent Protective Device)	A	25	25	20	35	40
REFRIGERATION (R-32)	MCA (Minimum Circuit Ampacity)	A	14.6	15.6	14.5	21.0	25.8
	Communication Wire Size and Type		4 × 14AWG	4 × 14AWG	4 × 14AWG	4 × 14AWG	4 × 14AWG
	Moisture Removal	pints/hr	1.9	2.5	3.8	4.2	7.9
	Refrigerant Charge Volume	oz.	21.2	21.9	45.9	47.7	72.4
	Liquid Pipe	in.	1/4	1/4	1/4	3/8	3/8
	Gas Pipe	in.	3/8	3/8	1/2	5/8	5/8
	Max. Pipe Length (Total)	ft.	65.6	65.6	98.4	98.4	98.4
	Max. Elevation (Indoor Units Higher Than Outdoor Unit)	ft.	49.2	49.2	49.2	49.2	49.2
INDOOR UNIT DIMENSIONS & WEIGHTS	Pre-charge Pipe Length	ft.	24.6	24.6	24.6	24.6	24.6
	Additional Refrigerant Charge per Foot After 25 ft.	oz./ft.	0.22	0.22	0.22	0.32	0.43
	Dimension (W×H×D)	in.	33-7/8×11-2/8×8-4/8	33-7/8×11-2/8×8-4/8	45-2/8×13-2/8×10-1/8	45-2/8×13-2/8×10-1/8	52-3/8×14-2/8×10-6/8
		mm	860×285×216	860×285×216	1,148×336×256	1,148×336×256	1,330×363×274
	Packing (L×H×W)	in.	36-5/8×15×11-2/8	36-5/8×15×11-2/8	47-7/8×16-1/8×13	47-7/8×16-1/8×13	56-1/8×15-4/8×18-1/8
		mm	930×285×380	930×285×380	1,215×330×410	1,215×330×410	1,425×395×460
OUTDOOR UNIT DIMENSIONS & WEIGHTS	Net Weight	lbs.	22.1	22.05	32.0	34.2	40.8
		kg	10.0	10.0	15.0	16.0	19.0
	Shipping Weight	lbs.	26.5	26.5	37.5	39.7	50.3
		kg	12.0	12.0	17.0	18.0	23.0
	Dimension (W×H×D)	in.	28-1/8×21-2/8×9-4/8	28-1/8×21-2/8×9-4/8	31-7/8×23×11	33-7/8×25-5/8×12-2/8	35-3/8×29-4/8×13-3/8
		mm	715×540×240	715×540×240	810×585×280	860×650×310	900×750×340
	Packing (L×H×W)	in.	32-5/8×23-1/8×13-3/8	32-5/8×23-1/8×13-3/8	37×25-2/8×15-1/8	39-1/8×28-3/8×16-4/8	41-6/8×32-2/8×17-6/8
		mm	830×588×340	830×588×340	940×640×385	995×720×420	1,060×820×450
	Net Weight	lbs.	52.9	57.3	86.0	101.4	121.3
		kg	24.0	26.0	39.0	46.0	55.0
	Shipping Weight	lbs.	57.3	61.7	92.6	110.3	132.3
		kg	26.0	28.0	42.0	50.0	60.0



# DIMENSIONAL DRAWINGS: WALL-MOUNTED HEAT PUMP


## INDOOR UNITS/ FAHSW09A1C, FAHSW12A1C

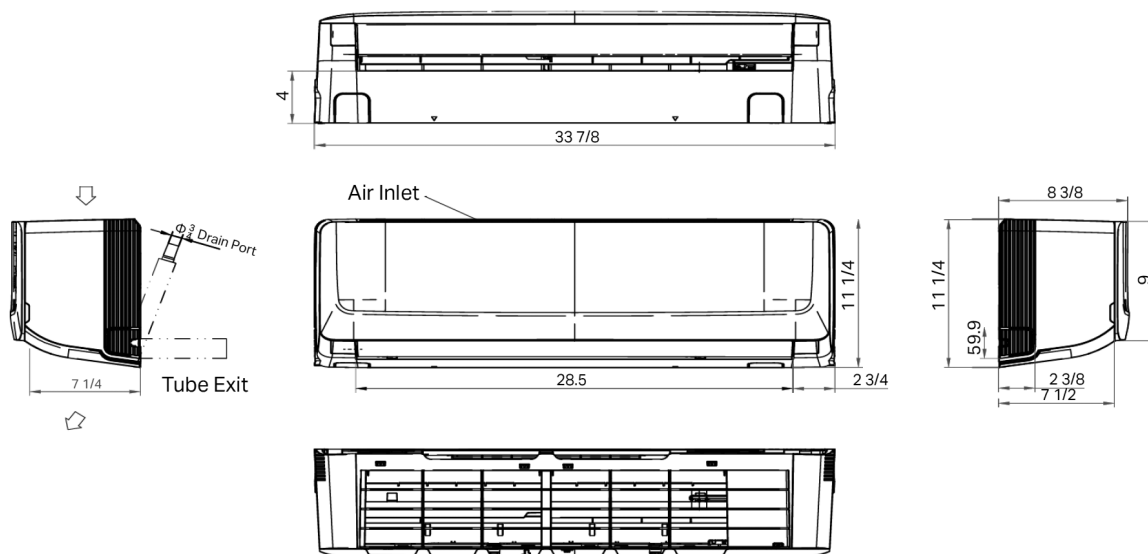

Model	W	H	D
<b>FAHSW09A1C, FAHSW12A1C</b>	33 7/8"	11 2/8"	8 3/8"

UNITS: INCHES

## INDOOR UNITS/ FAHFW18A3D, FAHFW24A3D

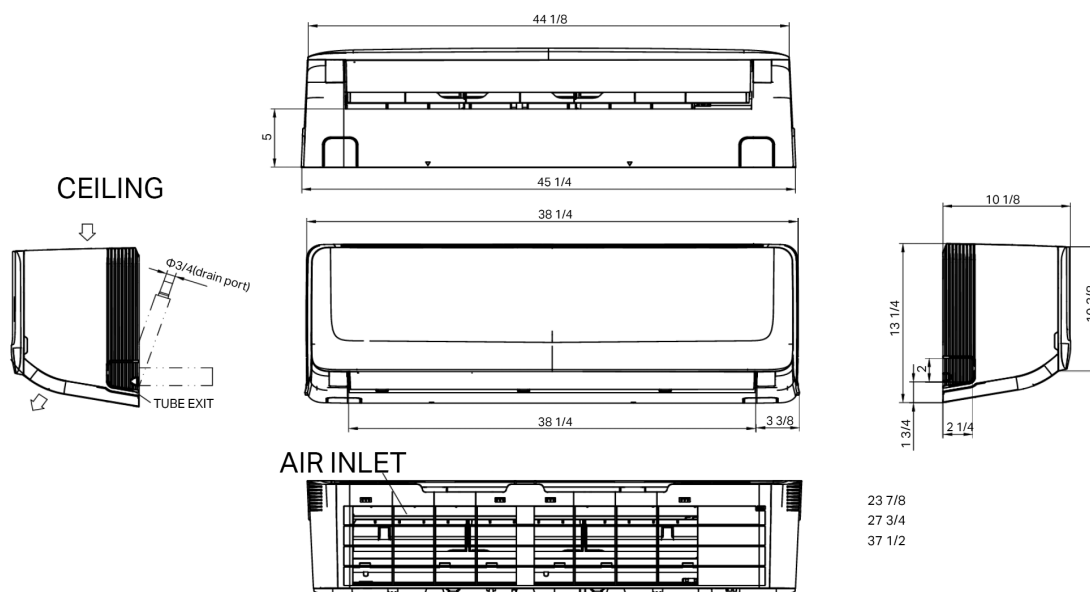


Model	W	H	D
<b>FAHFW18A3D, FAHFW24A3D</b>	45 2/8"	13 2/8"	10 1/8"

UNITS: INCHES

# DIMENSIONAL DRAWINGS: WALL-MOUNTED HEAT PUMP

## INDOOR UNITS/ FAHSW36A3D

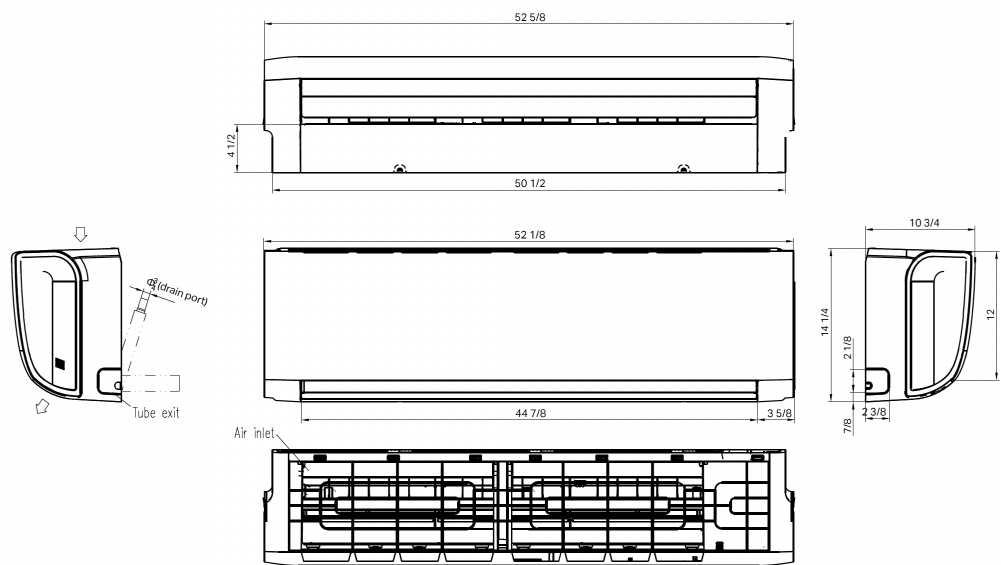


Model	W	H	D
<b>FAHSW36A3D</b>	52 5/8"	14 2/8"	10 6/8"

UNITS: INCHES

# DIMENSIONAL DRAWINGS: OUTDOOR HEAT PUMP


## OUTDOOR UNITS/ FSHSR09B1C, FSHSR12B1C

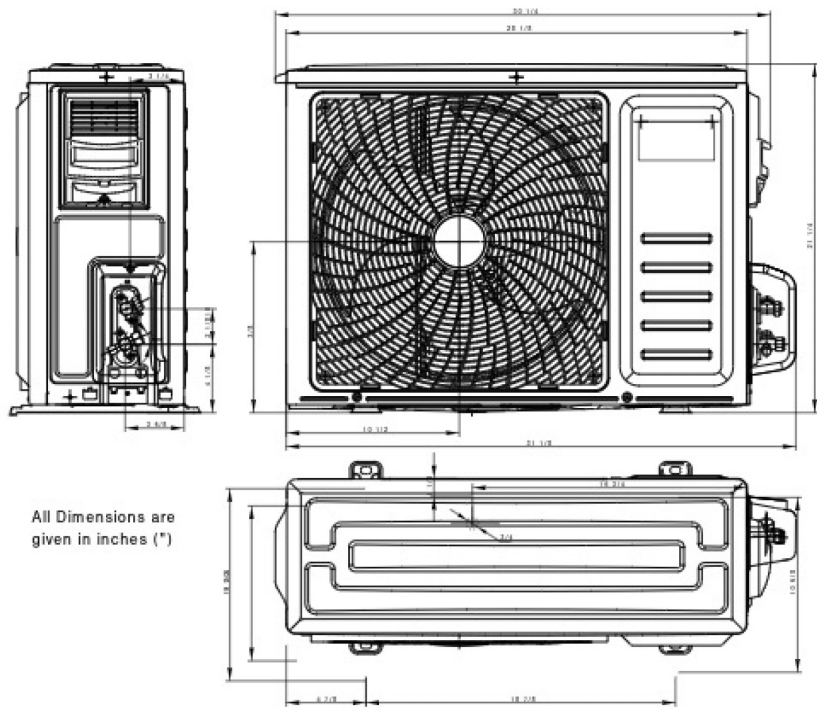

Model	W	H	D
<b>FSHSR09B1C, FSHSR12B1C</b>	28 1/8"	21 2/8"	8 4/8"

UNITS: INCHES

## OUTDOOR UNITS/ FSHSR18B3D

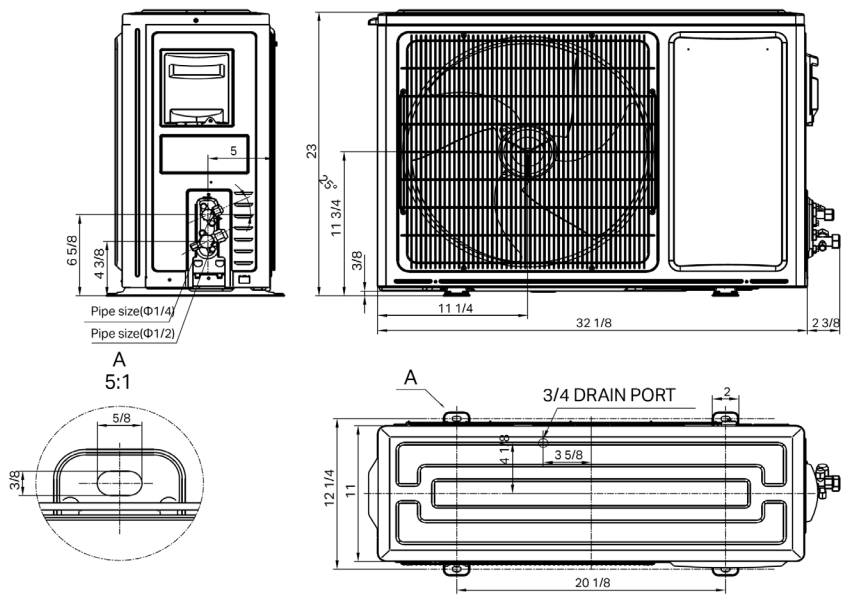


Model	W	H	D
<b>FSHSR18B3D</b>	32 1/8"	23"	11"

UNITS: INCHES

# DIMENSIONAL DRAWINGS: OUTDOOR HEAT PUMP


## OUTDOOR UNITS/ FSHSR24B3D

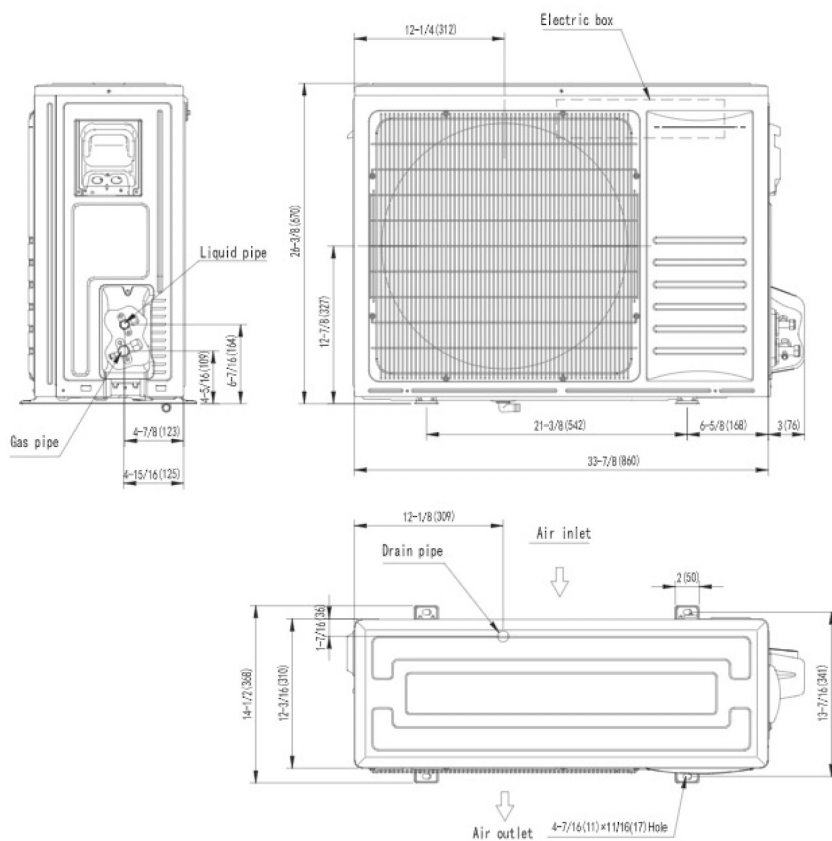


Model	W	H	D
<b>FSHSR24B3D</b>	33 7/8"	26 3/16"	12 2/8"

UNITS: INCHES

## OUTDOOR UNITS/ FSHSR36B3D

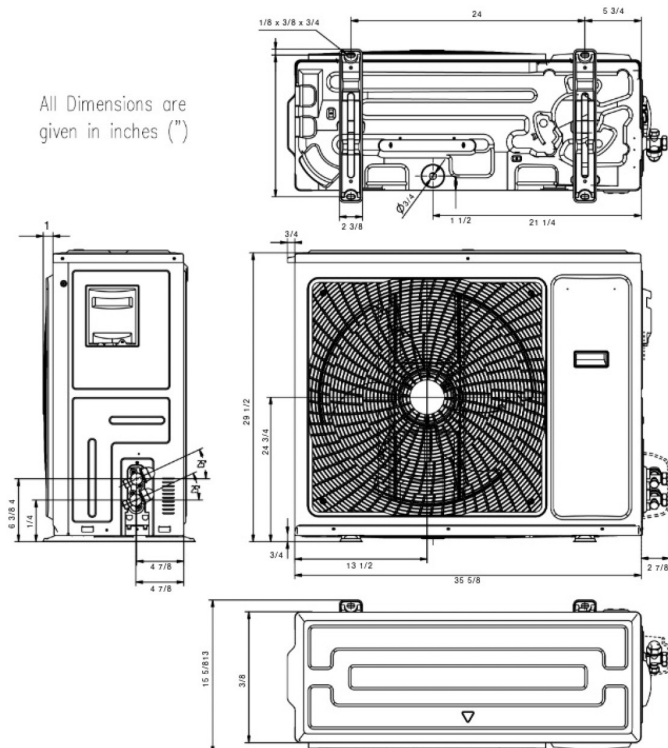

All Dimensions are given in inches (")

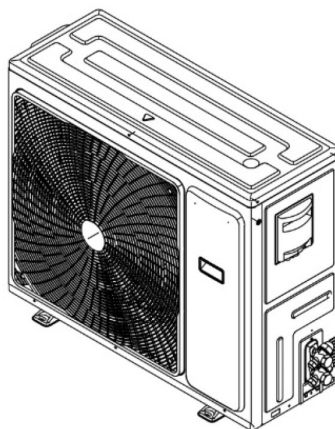

Model	W	H	D
<b>FSHSR36B3D</b>	35 5/8"	29 4/8"	13 3/8"

UNITS: INCHES

## REFRIGERATION LINE SETS\*

Kit#	Length (ft.)	Liquid	Suction	System Model
T32150	15'	1/4"	3/8"	FSHW091C, FSHW121C
T32350	35'	1/4"	3/8"	

Kit#	Length (ft.)	Liquid	Suction	System Model
T42150	15'	1/4"	1/2"	FSHW183D
T53250	25'	3/8"	5/8"	FSHW243D, FSHW363D

\*Insulated line sets are available for all Friedrich split systems in 15 ft. and 35 ft. lengths. Each line set is equipped with flare nuts on both ends. Both liquid and suction lines are insulated. Line sets can be joined together with field supplied double male connectors. Each system requires one line set for each indoor unit installed.

## REFRIGERATION LINE SETS MIN./MAX. LENGTHS

System Model	Min. (ft.)	Max. (ft.)
FSHW091C, FSHW121C	10	66
FSHW183D, FSHW243D	10	98
FSHW363D	15	98

## TORQUE WRENCH SETTINGS

Outside Diameter		Torque	
mm	inch	ft-lbs.	N-m
6.35	1/4	13 - 18	17.6 - 24.5
9.52	3/8	25 - 30	33.3 - 41.2
12.7	1/2	40 - 47	53.9 - 64.7
15.88	5/8	45 - 59	61.7 - 80.4

## ACCESSORIES



**FPWC1** – Optional hard-wired controller for Floating Air wall-mounted and cassette indoor models. Included with concealed ducted models. Not compatible with AHU indoor models. See your Friedrich representative for options.



**FreshAir Purifier APWM1 by iWave®** – Optional accessory for all wall-mounted ductless models that kills mold, bacteria and viruses—while effectively removing odors and VOCs.



**DSSXEMWRTA4** – Optional wireless energy management thermostat with occupancy sensor. For Floating Air Pro, single- and multi-zone models. See your Friedrich representative for options.



**ADS01** – Field-installed A2L sensor for Floating Air R-454B wall-mounted applications.

**ADS02** – Field-installed A2L sensor for Floating Air R-32 wall-mounted applications. See Installation and Operational Manual for additional information & requirements.