

# SUSTAINABLE & EFFICIENT REPLACEMENTS

for Gas Water Heaters



*These products meet  
a stringent set of our  
company's internally  
defined sustainability  
standards*



**NEW 120V  
TECHNOLOGY**

**FRIEDRICH® H-SERIES™**  
Plug-in Heat Pump  
Water Heater

**FRIEDRICH® H-SERIES™**  
Plug-in Heat Pump Water  
Heater with HydroBoost



**FRIEDRICH**



**Friedrich.com/WaterHeating**

# REVOLUTIONARY 120V PLUG

## The Friedrich H-Series Family of Heat Pump Water Heaters

### Available in 120V Plug-in Options

Friedrich® H-Series™ Plug-in models are a sustainable, smart and simple gas water heater replacement. Because they offer a quick and easy install with minimal<sup>1</sup> clearance requirements and a standard tank footprint, both of the Friedrich H-Series Plug-ins are ideal for drop-in gas replacement and high efficiency upgrades while eliminating the need to install a 240V electric service.



## High Efficiency, Sustainability, Easy Installation

### SUPER HIGH EFFICIENCY

- **Up to 5x the Efficiency of a Standard Gas Tank** – 3.0 UEF for dedicated circuit and 3.5 UEF for shared circuit
- **Added Savings** – Built-in smart operating modes and time-of-use scheduling for increased efficiency

### SUSTAINABLE SOLUTION


- **Reduces Carbon Footprint and Energy Costs** – Up to an 80% reduction in energy use
- **No NOx Emissions** – A cleaner and healthier environment
- **ENERGY STAR® Certified** – Qualifies for local incentives and tax credits
- **Demand Response Ready** – Built-in EcoPort™ (CTA-2045 Port) and built-in Wi-Fi allow easy connection to Utility programs





### QUICK & EASY UPGRADE

- **Easy Gas Replacement** – **Industry-first** 120V Plug-in Heat Pump Water Heater technology
- **2x Faster Install** – High efficiency upgrade with easy ducting and no condensate neutralizer needed
- **Installs in More Places** – Minimal<sup>1</sup> clearance requirement and the same footprint as a standard gas tank
- **Streamlines Install and Service** – Advanced diagnostics and reduced callbacks with one-button start up verification

For optimal operation, installation in shaded map zone is recommended. When installing outside of the shaded zone, consult your local plumbing contractor.

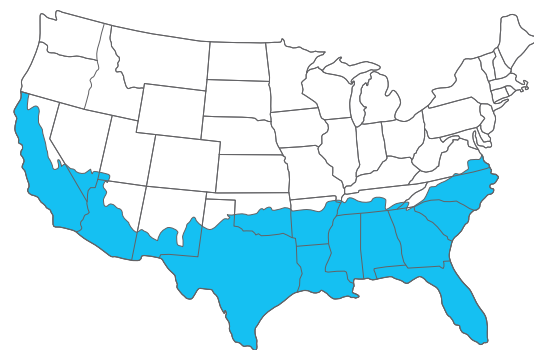

Average Ambient Air Temp in January



<sup>1</sup>Zero side clearance requirement for Friedrich H-Series Plug-in Heat Pump Water Heater with HydroBoost.


# PLUG-IN HEAT PUMP TECHNOLOGY

## FRIEDRICH H-SERIES PLUG-IN HEAT PUMP WATER HEATER WITH HYDROBOOST

- **Exclusive HydroBoost Extends Tank's Hot Water** – Mixing valve maximizes output performance
- **Easy Generator Back-up** – Low power draw enables easy back-up when electricity is unavailable
- Shared 120V 15A circuit required


## FRIEDRICH H-SERIES PLUG-IN HEAT PUMP WATER HEATER

- **Fastest Tank Recovery** – Industry's largest compressor delivers the fastest Heat Pump Water Heater Recovery on the market and performs similarly to a standard gas tank
- Dedicated 120V 15A circuit required

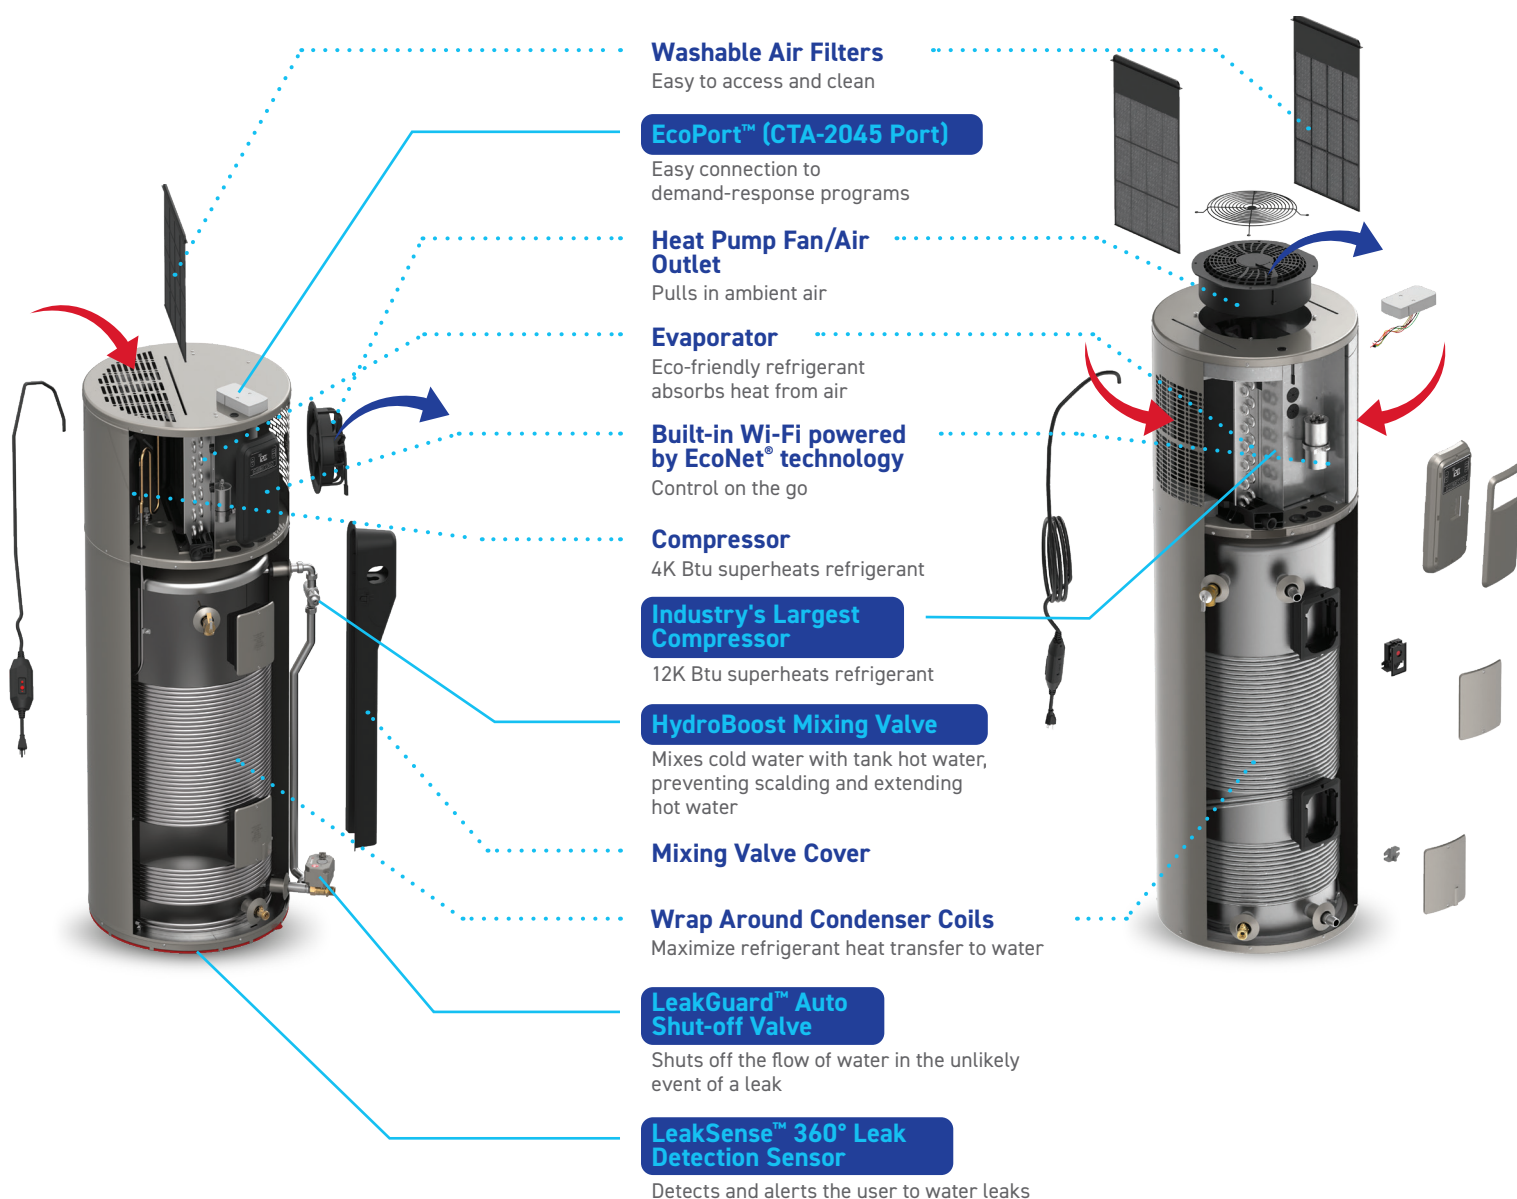



# Friedrich® H-Series™ Plug-in Specifications

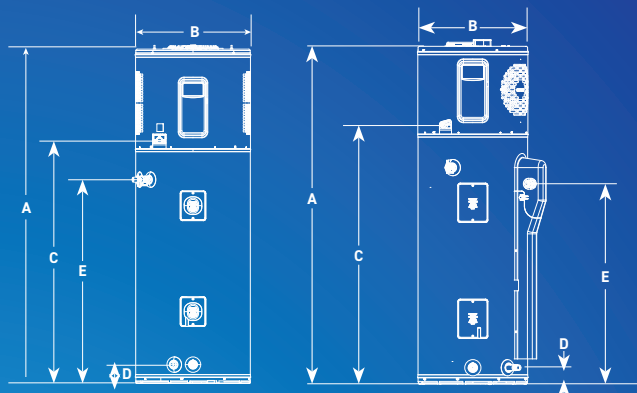

Friedrich H-Series Plug-in Heat Pump Water Heater – 120V Dedicated Circuit

DESCRIPTION				ENERGY INFO		FEATURES				TANK DIMENSIONS					
NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER	ELECTRIC BREAKER (TIME DELAY) SIZE	AVERAGE ELECTRICAL WATTAGE	UNIFORM ENERGY FACTOR (UEF)	COMPRESSOR BTU/H	FIRST HOUR RATING (GALLONS)	RECOVERY IN G.P.H. 60° F RISE	HEIGHT (A)	DIAMETER (B)	HEIGHT TO CONDENSATE (C)	HEIGHT TO COLD INLET & DRAIN (D)	HEIGHT TO HOT OUTLET AND T&P (E)	UNIT WT. (LBS)	APPROX. SHIP WT. (LBS)
50	46	PROH50 TO FD120	15A	440W	3.0	12,000	51	29	65"	22-1/4"	47-1/4"	3-5/8"	39-5/8"	210	252

Friedrich H-Series Plug-in Heat Pump Water Heater with HydroBoost and LeakGuard™ – 120V Shared Circuit

Description			Energy Info			Features				Tank Dimensions						
Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Electric Breaker Size	Average Electrical Wattage	Uniform Energy Factor (UEF)	Compressor BTU/H	First Hour Rating		Recovery in G.P.H. 60°F Rise	Height (A)	Diameter (B)	Height to Condensate (C)	Height to Cold Inlet & Drain (D)	Height to Hot Outlet (E)	Unit Wt. (LBS)	Approx. Ship Wt. (LBS)
							Tank Set Point Temp. (Degrees °F)	Gallons								
40	36	PROPH40 TO FD120-MSO	15A	440W	2.8	4,200	140	45	12	63"	20-1/4"	47"	3-5/8"	39-5/8"	157	194
50	46	PROPH50 TO FD120-MSO	15A	440W	3.0	4,200	140	55	12	62"	22-1/4"	47"	3-5/8"	39-5/8"	178	218
65	59	PROPH65 TO FD120-MSO	15A	395W	3.33	4,200	128	63	12	65"	24-1/4"	49"	3-7/8"	42-3/8"	225	262
80	72	PROPH80 TO FD120-MSO	15A	395W	3.46	4,200	132	84	12	75"	24-1/4"	59"	3-7/8"	42-3/8"	244	281

Friedrich H-Series Plug-in Heat Pump Water Heater with HydroBoost – 120V Shared Circuit

DESCRIPTION				ENERGY INFO		FEATURES				TANK DIMENSIONS						
NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER¹	ELECTRIC BREAKER SIZE	AVERAGE ELECTRICAL WATTAGE	UNIFORM ENERGY FACTOR (UEF)	COMPRESSOR BTU/H	FIRST HOUR RATING		RECOVERY IN G.P.H. 60°F RISE	HEIGHT (A)	DIAMETER (B)	HEIGHT TO CONDENSATE (C)	HEIGHT TO COLD INLET & DRAIN (D)	HEIGHT TO HOT OUTLET (E)	UNIT WT. (LBS)	APPROX. SHIP WT. (LBS)
							TANK SET POINT TEMP. (DEGREES °F)	GALLONS								
40	36	PROPH40 TO FD120-M	15A	440W	2.8	4,200	140	45	12	63"	20-1/4"	47"	3-5/8"	39-5/8"	157	194
50	46	PROPH50 TO FD120-M	15A	440W	3.0	4,200	140	55	12	62"	22-1/4"	47"	3-5/8"	39-5/8"	178	218
65	59	PROPH65 TO FD120-M	15A	395W	3.3	4,200	128	63	12	65"	24-1/4"	49"	3-7/8"	42-3/8"	225	262
80	72	PROPH80 TO FD120-M	15A	395W	3.46	4,200	132	84	12	75"	24-1/4"	59"	3-7/8"	42-3/8"	244	281

¹M-models are LeakGuard and LeakSense ready. Easily add available leak sensor and shut-off valve upgrade kit.

**NOTE:** Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements. All units have integrated Wi-Fi control board.



## Contact Us

### Customer Service, Warranty, Parts

800-621-5622

### Plumbing Support Team

866-339-2388

### EcoNet® Technical Support

800-255-2388

### Technical Service for Heat Pump Water Heaters

800-995-0982

### Technical Service

800-HEATER3 (800-432-8373)



Visit us online at  
**Friedrich.com/WaterHeating**  
or see your local distributor.

© 2025 Rheem Sales Company, Inc. manufactures the Friedrich brand of commercial and residential water heating products. In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.