



# FRIEDRICH

1 8 8 3

## Commercial Renaissance® Line F-Series™ and F-Series Plus™ Packaged Air Conditioners



### RACC Series

Cooling Efficiencies up to:

RACCYC F-Series Plus 3 to 5 Tons: 12.0 EER2 / 16.2 SEER2

RACCYB F-Series 3 to 5 Tons: 10.6 EER2 / 13.4 SEER2

RACCYB F-Series 6 Tons: 11.2 EER / 14.8 IEER

Nominal Sizes: 3, 4, 5 & 6 Tons [10.6, 14.0, 17.6 & 21.1 kW]

Cooling Capacities: 34.2k Btu/h to 68.5k Btu/h

Refrigerant Type: R-454B

ASHRAE 90.1 2022 Compliant Models



TABLE OF CONTENTS

Unit Features & Benefits .....3-11

Model Number Identification .....12

Options .....13

Selection Procedures .....14

General Data.....15-21

General Data Notes .....22

Weighted Sound Power .....23

Cooling Performance Data .....24-30

Gross Systems Performance Data .....31-36

Airflow Performance Data .....37-44

Electrical Data .....45-51

Heater Kit Characteristics .....52-58

Safety Data .....59

Dimensional Data .....60-62

Field-Installed Accessories.....63-88

Guide Specifications .....89-93

Limited Warranty .....94



## **RACC STANDARD FEATURES INCLUDE:**

### **Convenience & Serviceability Features**

- Forkable base rails for easy handling and lifting
- Color-coded and labeled wiring
- External, lockable gauge ports
- Field convertible airflow - vertical downflow or horizontal sideflow
- Solid-core liquid line filter drier
- Filter access features hinged access with heavy-duty gasketing, 1/4 turn latches, and flexible-fit filter rack for easy filter size changes, up to MERV8 or MERV13
- Slide-out indoor fan assembly for added service convenience
- Slide-out, internally sloped condensate drain pan with overflow switch, conforms to ASHRAE 62 standards
- Factory-installed refrigerant leak detection system
- Standard Modbus interface

### **Quality Manufacturing Features**

- Factory charged with R-454 refrigerant
- Wired and run tested at the factory
- Powder Paint Finish meets ASTM B117 test requirements. G90 galvanized steel coated on each side.
- SEET tested for reliable performance in a variety of operating conditions
- Foil faced insulation encapsulated throughout entire unit minimizes airborne fibers in the air stream

### **Performance Features**

- Cooling operation up to 125°F ambient
- Scroll compressors with internal line break overload and high-pressure protection
- MicroChannel evaporator and condenser coil
- High pressure and low pressure/loss of charge protection

## FACTORY-INSTALLED OPTIONS:

- Louvered panels
- Hinged access doors
- Low ambient/freeze stat
- Non-powered convenience outlet
- Economizer (Title 24 and ASHRAE 90.1 2022 compliant)
- Supply and return smoke detector
- ElectroFin® E-Coat for MicroChannel Condenser Coil Coating
- ClearControl™ Direct Digital Control (DDC)
- Comfort Alert® Phase-monitor Protection

## FIELD-INSTALLED ACCESSORIES:

| Accessory                                                                                              | Model Number  | Factory Installation Available? |
|--------------------------------------------------------------------------------------------------------|---------------|---------------------------------|
| <b>Economizers</b>                                                                                     |               |                                 |
| DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Honeywell Controller</i>   | RXRD-01MCDAM3 | Yes                             |
| DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Honeywell Controller</i> | RXRD-01MCHBM3 | No                              |
| Non-DDC Economizer with No Controls (Downflow) <i>MicroMetl Economizer, Belimo Actuator</i>            | RXRD-31MCDAM3 | No                              |
| Non-DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Siemens Controls</i>   | RXRD-11MCDAM3 | Yes                             |
| Non-DDC Economizer with Single Enthalpy (Downflow) <i>RRS Economizer with RRS Basic Controller</i>     | RXRD-41MCDAM3 | No                              |
| Non-DDC Economizer with Single Enthalpy (Downflow) <i>RRS Economizer with Siemens Controls</i>         | RXRD-51MCDAM3 | No                              |
| Non-DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Siemens Controls</i> | RXRD-11MCHAM3 | No                              |
| Non-DDC Economizer with Single Enthalpy (Horizontal) <i>RRS Economizer with RRS Basic Controller</i>   | RXRD-41MCHAM3 | No                              |
| Non-DDC Economizer with Single Enthalpy (Horizontal) <i>RRS Economizer with Siemens Controls</i>       | RXRD-51MCHAM3 | No                              |
| Economizer Universal DDC Interface Kit                                                                 | RXRX-DDC01    | Yes <sup>1</sup>                |

<sup>1</sup>When a factory installed economizer is selected in the unit option codes, this accessory is automatically factory installed if required.



**FIELD-INSTALLED ACCESSORIES (CONTINUED):**

| Accessory                                                                 | Model Number | Factory Installation Available? |
|---------------------------------------------------------------------------|--------------|---------------------------------|
| Comfort Alert (1 Phase) DDC                                               | RXXR-AZ03    | Yes                             |
| Comfort Alert (1 Phase) Non-DDC                                           | RXXR-AZ04    | Yes                             |
| Comfort Alert (3 Phase) DDC                                               | RXXR-AZ01    | Yes                             |
| Comfort Alert (3 Phase) Non-DDC                                           | RXXR-AZ02    | Yes                             |
| Communication Card, BACnet                                                | RXXR-AY01    | No                              |
| Communication Card, LonWorks                                              | RXXR-AY02    | No                              |
| Concentric Adapter 3-4 Ton Drop                                           | RXMC-DC01    | No                              |
| Concentric Adapter 5-6 Ton Drop                                           | RXMC-DC02    | No                              |
| Concentric Diffuser 3-4 Ton Drop                                          | RXRN-AED1800 | No                              |
| Concentric Diffuser 5-6 Ton Drop                                          | RXRN-AED2000 | No                              |
| Concentric Diffuser 3-4 Ton Flush                                         | RXRN-AEF1800 | No                              |
| Concentric Diffuser 5-6 Ton Flush                                         | RXRN-AEF2000 | No                              |
| Convenience Outlet, Non-Powered                                           | RXXR-BN01    | Yes                             |
| Dual Enthalpy Kit DDC (for Honeywell DDC)                                 | RXXR-BV02    | No                              |
| Dual Enthalpy, Temperature and Humidity Sensor (for RRS Basic Controller) | PD955977     | No                              |
| Dual Enthalpy, Temperature and Humidity Sensor (for Siemens Controller)   | PD555460     | No                              |
| Electric Heater Kits <sup>2</sup>                                         | RXJJ-DC10JT  | Yes                             |
|                                                                           | RXJJ-DC15JT  | Yes                             |
|                                                                           | RXJJ-DC20JT  | Yes                             |
|                                                                           | RXJJ-DC10CP  | Yes                             |
|                                                                           | RXJJ-DC15CP  | Yes                             |
|                                                                           | RXJJ-DC20CP  | Yes                             |
|                                                                           | RXJJ-DC24CP  | Yes                             |
|                                                                           | RXJJ-DC10DNV | Yes                             |
|                                                                           | RXJJ-DC15DNV | Yes                             |
|                                                                           | RXJJ-DC20DNV | Yes                             |
|                                                                           | RXJJ-DC24DNV | Yes                             |
|                                                                           | RXJJ-DC10Y   | No                              |
|                                                                           | RXJJ-DC15Y   | No                              |
|                                                                           | RXJJ-DC20Y   | No                              |
|                                                                           | RXJJ-DC24Y   | No                              |
| Freeze Stat Kit                                                           | RXXR-AM05    | Yes                             |
| Fresh Air Damper, Manual                                                  | RXRF-ACA1    | No                              |
| Fresh Air Damper, Motorized                                               | RXRF-ACB1    | No                              |
| Low-Ambient Control Kit                                                   | RXRZ-A04     | Yes                             |

<sup>2</sup>10kW options not available on 6 Ton models

| Accessory                                        | Model Number               | Factory Installation Available? |
|--------------------------------------------------|----------------------------|---------------------------------|
| MERV 8 Filter                                    | RXMF-M08A21616             | No                              |
| MERV 13 Filter                                   | RXMF-M13A21616             | No                              |
| Outdoor Coil Louver Kit                          | RXXR-ADD04C                | Yes                             |
| Power Exhaust (230V) Vertical <i>MicroMetl</i>   | RXXR-CCF02C                | No                              |
| Power Exhaust (460V) Vertical <i>MicroMetl</i>   | RXXR-CCF02D                | No                              |
| Power Exhaust (230V) Horizontal <i>MicroMetl</i> | RXXR-CCF03C                | No                              |
| Power Exhaust (460V) Horizontal <i>MicroMetl</i> | RXXR-CCF03D                | No                              |
| Power Exhaust (230V) Vertical <i>RRS</i>         | RXXR-RCF02C                | No                              |
| Power Exhaust (460V) Vertical <i>RRS</i>         | RXXR-RCF02D                | No                              |
| Power Exhaust (575V) Vertical <i>RRS</i>         | RXXR-RCF02Y                | No                              |
| Power Exhaust (230V) Horizontal <i>RRS</i>       | RXXR-RCF03C                | No                              |
| Power Exhaust (460V) Horizontal <i>RRS</i>       | RXXR-RCF03D                | No                              |
| Power Exhaust (575V) Horizontal <i>RRS</i>       | RXXR-RCF03Y                | No                              |
| Roofcurb, 14"                                    | RXKG-DCC14                 | No                              |
| Roofcurb, 14" Welded                             | RXKG-DC14                  | No                              |
| Roofcurb, 24"                                    | RXKG-DCC24                 | No                              |
| Roofcurb, 24" Welded                             | RXKG-DC24                  | No                              |
| Roofcurb Adapter                                 | RXXR-DCCAE                 | No                              |
| Sensor, Carbon Dioxide (Wall Mount)              | RXXR-AR02                  | No                              |
| Sensor, Room Humidity                            | RHC-ZNS4                   | No                              |
| Sensor, Room Temperature and Relative Humidity   | RHC-ZNS5                   | No                              |
| Single Point Wiring Kits                         | RXJX-AJ0601 (Single Phase) | No                              |
|                                                  | RXJX-AZ0601 (Three Phase)  | No                              |
| Smoke Detector, Return (Field kit)               | RXXR-BS01                  | No                              |
| Smoke Detector, Return/Supply (Field kit)        | RXXR-BS02                  | No                              |
| Unfused Service Disconnect                       | RXXR-BP01                  | Yes                             |
| UV-C Kit 208V/230V                               | RXXR-UV22C                 | No                              |
| UV-C Transformer 460V/575V                       | RXXR-UVCTC                 | No                              |



### Cabinet and Foundation

Outwardly, the large Friedrich® Commercial Series label (1) identifies the brand to the customer. The sheet metal cabinet (2) uses 18-gauge material for structural components with an underlying coat of G90. To ensure the leak proof integrity of these units, the design utilizes a one piece top with a 1/8" drip lip (3) as well as gasket protected panels and screws. The Friedrich hail guard (optional) (4) sets the standard for coil protection in the industry. Electro deposition, baked-on enamel that is tested to withstand a rigorous 1000-hour salt spray test, per ASTM B117.

Anything built to last must start with the right foundation. Following that model, the foundation is comprised of 14-gauge, commercial-grade, full perimeter base rails (5) that integrate fork slots and rigging holes to save set-up time on the job site.

### Easy Installation

The Renaissance line features a new footprint that simplifies the replacement process by eliminating the need for a new curb adapter and being able to match inlet, outlet and electrical connections of the most common/industry-standard configurations.

### Base Pan

The base pan is stamped to form a 7/8" flange around the supply and return cover, which eliminates the worry of water entering the conditioned space (6). All insulation is secured with both adhesive and mechanical fasteners, and all edges are hidden.



### Drain Pan

The Qwik-Clean Drain Pan (7) is made from a composite material that resists the growth of harmful bacteria. With both side and center drain options, the drain pan slides out completely for easy cleaning. It also features a standard overflow switch.



### Test Standards


During development, each unit was tested to U.L. 60335-2-40, AHRI 210/240 (3-5 ton) or AHRI 340/360 (6 ton), as well as other Friedrich-required reliability tests. Friedrich adheres to stringent ISO 9001 quality procedures, and each unit bears the U.L. and AHRI certification labels located on the unit nameplate. Contractors can be assured that when a Friedrich packaged unit arrives at the job, it is ready to go with a factory charge and quality checks.

### Easy Access

All major compartments are easily accessible from the front of the unit: the electrical compartment, blower compartment, heating section, and outdoor section. Each compartment has mechanical fasteners. Panels are permanently embossed with the compartment name (e.g. control/filter access, blower access, and electric heat access). The filter compartment is accessed through a large, mechanically fastened panel. Information is readily available on the outside of the panel, with a nameplate that contains the model and serial numbers, electrical data, and other important unit information. Hinged access is available as an option for the electrical, blower, and filter compartments.

## Charging Charts, Wiring Diagrams, & Labels

The unit charging chart is located on the outside of the compressor access panel. Electrical wiring diagrams are found on the control box cover, which allows contractors to move them to more readable locations. The model and serial numbers are located on the right of the control box. Having this information on the inside means easier model identification for the life of the product. The production line quality test assurance label is also placed in this location ([8]).



## Filter Rack


Located within the filter compartment, the Qwik-Change Flex-Fit Rack ([9]) allows easy changeover between 2" and 4" standard size and readily available filters.



## Blower Assembly


Removing three screws provides full access to the blower compartment. Inside, the Qwik-Slide Blower Assembly ([10]) is incredibly easy to access and remove. This makes servicing internal components such as blower motor, TXV, and MicroChannel coil much easier. The entire assembly slides out by removing the 3/8" screws from the blower retention bracket.

Where the demands for the job require high static, Friedrich offers drives ([11]) that deliver nominal airflow up to 1.5" of static. By referring to the airflow performance tables listed in the installation instructions, proper static pressure and CFM requirements can be dialed in. The scroll housing ([12]) and blower scroll provide quiet and efficient airflow.

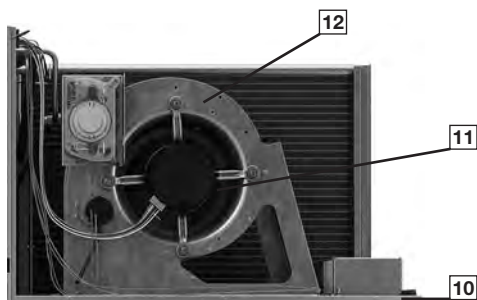


## High and Low Pressure Switches & Freeze Stat

High pressure ([13]) and low pressure ([14]) switches are standard. They are located in the outdoor section along with the low-ambient control ([15]). The optional Freeze Stat ([16]) (standard on models with ClearControl), is clipped onto the suction line in the blower compartment. The low ambient control allows the compressor to operate down to 0 degrees ambient temperature by cycling the outdoor fans on high pressure. The high-pressure switch shuts off the compressors if pressures exceeding 610 PSIG are detected. The low-pressure switch shuts off the compressors if low pressure is detected due to loss of charge. Built-in Smart Logic reduces nuisance calls by only shutting off compressors after the third detection. The freeze stat protects the compressor if the evaporator coil gets too cold (below freezing) due to low airflow.

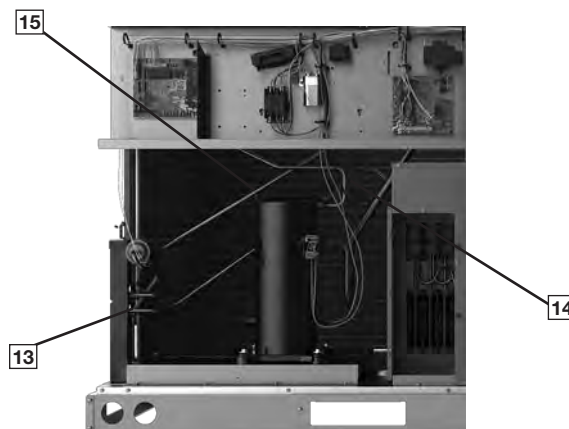

## MicroChannel Evaporator & TXV

The MicroChannel Evaporator ([17]) is accessible through the blower compartment, and through the filter rack, to simplify cleaning. The evaporator uses MicroChannel technology for maximum heat transfer, light weight, fewer manually brazed connections and reduced refrigerant charge. The TXV metering device maintains superheat over a wide range of varying temperatures optimizing unit performance for all conditions.

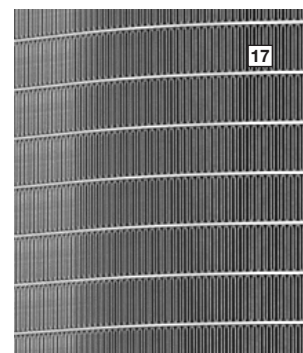


## Control Box

Inside the control box ([18]), each electrical component is clearly labeled; that label matches the component to the wire diagram for ease of trouble shooting. All wiring is numbered on each end of the termination and is color-coded to match the wiring diagram. The integrated furnace control, incorporates the PlusOne Diagnostics: Dual 7-Segment LED Display ([19]) with easy-to-understand fault codes. The control transformer has a low voltage circuit breaker that trips if an electrical short occurs.



## ClearControl DDC System

The optional ClearControl Direct Digital Control (DDC) system consisting of a rooftop unit controller, temperature sensors, and pressure sensors, allows real-time monitoring and communication between rooftop units. The Rooftop Unit Controller (RTU-C) that is factory mounted and wired into the control panel. The RTU-C is a solid-state, microprocessor-based control board that provides flexible control and extensive diagnostics for all unit functions. The RTU-C, using proportional/integral control algorithms, performs specific unit functions that govern unit operation in response to zone conditions, system temperatures, system pressures, ambient conditions, and electrical inputs. The RTU-C features a 16 x 2 character LCD display and a five-button keypad for local configuration and direct diagnosis of the system ([20]). Features include a clogged filter switch (CFS), fan proving switch (FPS), return air temperature sensor (RAT), discharge air temperature sensor (DAT), and outdoor air temperature sensor (OAT). Freeze sensors (FS) are used in place of freeze stats to allow measurement of refrigerant suction line temperatures.

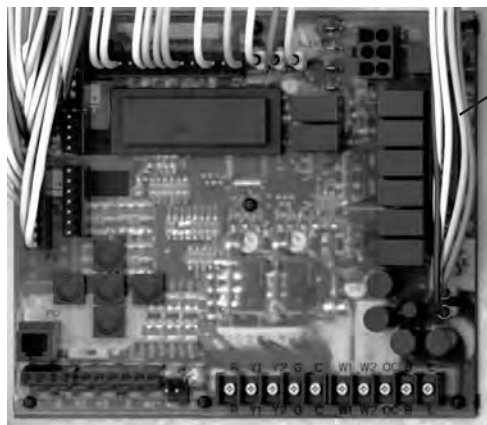


The RACC Cooling only with the RTU-C is specifically designed to be applied in four distinct applications:

- 1. BACnet Communication** — The RACC is compatible with a third party building management system that supports the BACnet Application Specific Controller device profile, with the use of a field-installed BACnet Communication Module. The BACnet Communication Module plugs onto the unit RTU-C controller and allows communication between the RTU-C and the BACnet MSTP network. A zone sensor, a BACnet network zone sensor, a BACnet thermostat, or DDC controller may be used to send the zone temperature or thermostat demands to the RTU-C. The BACnet Communication Module is compatible with MSTP EIA-485 daisy chain networks communicating at 38.4 bps. It is compatible with twisted pair, shielded cables.
- 2. LonWorks Communication** — The RACC is compatible with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile. This is accomplished with a field-installed LonMark communication module. The LonMark Communication Module plugs onto the RTU-C controller and allows communication between the RTU-C and a LonWorks network. A zone sensor, a LonTalk network zone sensor, or a LonTalk thermostat or DDC controller may be used to send the zone temperature or thermostat demands to the RTU-C. The LonMark Communication Module utilizes an FTT-10A free topology transceiver communicating at 78.8 kbps. It is compatible with Echelon qualified, twisted pair cable, Belden 8471, or NEMA Level 4 cables. The module can communicate up to 1640 feet with no repeater. The LonWorks limit of 64 nodes per segment applies to this device.
- 3. 24V Thermostat Compatibility** — The RACC is compatible with a programmable 24 volt thermostat. Connections are made via conventional thermostat screw terminals. Extensive unit status and diagnostics are displayed on the LCD screen of the RTU-C.
- 4. Zone Sensor Compatibility** — The RACC is compatible with a zone sensor and a mechanical or solid state time clock connected to the RTU-C. Extensive unit status and diagnostics are displayed on the LCD screen of the RTU-C.

## Comfort Alert


A factory or field installed Comfort Alert ([21]) module is available for power phase-monitoring protection and additional compressor diagnostics. The alarms can be displayed on the RTU-C display, through the (BAS) network, or connected to the "L-Terminal" of a thermostat for notification.

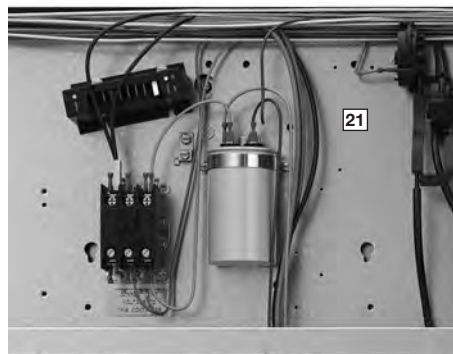




## Convenience Outlet, Disconnect, & Circuit Breaker

The convenience outlet option comes non-powered from the factory (23). Low and high voltage can enter from the side or through the base. Low-voltage connections are made through the low-voltage terminal strip. For ease of access, the U.L.-required low voltage barrier can be temporarily removed for low-voltage termination and then reinstalled. The high-voltage connection is terminated at the number 1 compressor contactor. The suggested mounting for the field-installed disconnect or circuit breaker is on the exterior side of the electrical control box.



## External Lockable Gauge Ports

The unit's refrigerant gauge ports are mounted externally and include several features that enhance accessibility and serviceability. Accessed through a large, lockable door (25) so technicians have plenty of space to connect to the ports if needed, the external position allows for an accurate diagnostic of system operation without removing access panels which can affect unit performance. They are permanently identified by embossed lettering that identifies the high pressure connection and low pressure connection. The red plastic caps on the refrigerant ports (26) indicate that this unit is charged with A2L refrigerant.



## Compressor

The compressor compartment houses the heartbeat of the unit. The scroll compressor (30) is known for its long life and for reliable, quiet, and efficient operation. The suction and discharge lines are designed with shock loops (31) to absorb the strain and stress that the starting torque, steady state operation, and shut-down cycle impose on the refrigerant tubing. 3-5 ton YB units include one single-stage compressor, and 6 ton YB units and 3-5 ton YC units include one two-stage compressor.




## Condenser Fans

The condenser fan motor (32) can easily be accessed and maintained through the top of the unit. A down-mount fan provides corrosion protection and easy removal. The polarized plug connection allows the motor to be changed quickly and eliminates the need to snake wires through the unit.



## MicroChannel Condenser Technology

The outdoor coil uses the latest MicroChannel technology (33) for the most effective method of heat transfer. The outdoor coil is protected by optional louvered panels, which allow unobstructed airflow while protecting the unit from both the environment and vandalism.



## Coil Coating

Every unit offers the option of factory-applied ElectroFin E-Coat condenser coating (34) that delivers superior corrosion resistance for outdoor coils to operate in the harshest of environments.



## Economizer and Dampers

Each unit is designed for both down flow or horizontal applications (35) for job configuration flexibility. The return air compartment can also contain an economizer. Each unit is pre-wired for the economizer to allow quick, plug-in installation. Available as a factory-installed option, the economizer provides free cooling when outdoor conditions are suitable and also provides fresh air to meet local requirements. It comes standard with single enthalpy controls, which can be upgraded to dual enthalpy easily in the field. The economizer control has a minimum position set point, an outdoor-air set point, a mixed-air set point, and a CO<sub>2</sub> set point. Barometric relief is standard on all economizers.



Power Exhaust is easily field-installed. The power exhaust is housed in the barometric relief opening and is easily slipped in with a plugin assembly. The wire harness to the economizer also has accommodations for a smoke detector.

The damper minimum position, actual damper position, power exhaust on/off set point, mixed air temperature limit set point, and Demand Controlled Ventilation (DCV) set point can be read and adjusted at the unit controller display or remotely through a network connection. The Space CO<sub>2</sub> level, mixed air temperature, and Economizer Status (free cooling available, single or dual enthalpy) can be read at the unit controller display or remotely through a network connection. Economizer faults will trigger a network alarm and can be read at the unit controller display or remotely through a network connection.

## Roofcurb


The roofcurb (36) is made for tool-less assembly at the jobsite by engaging tabs in slots of adjacent curb sides, which makes the assembly process quick and easy.



## Refrigerant Leak Detection

In the event of a detected refrigerant leak, the refrigerant leak detection sensor (37) will trigger the mitigation procedure that shuts off the compressor(s) and turns on the indoor blower motor.


The sensor is installed on the bracket facing the filter rack. From the outside of the unit, the sensor is not visible.

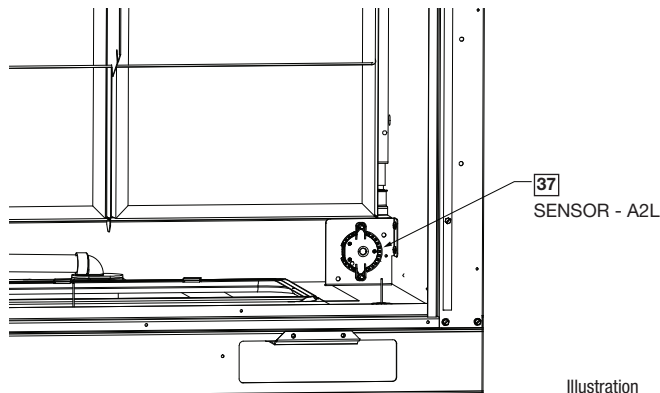


## HUMIDIDRY DEHUMIDIFICATION SYSTEM

With the factory-installed dehumidification option, in addition to a thermostat or space temperature sensor that is normally present, an indoor relative humidity sensor is installed in the occupied space and connected to the Rooftop Unit Controller (RTU-C) which then controls the capacity of the cooling coil to remove moisture from the supply air and maintain space relative humidity below an adjustable limit visible on the RTU-C display. The default value is the ASHRAE recommended limit of 60% RH. With this option, a refrigerant reheat coil is installed downstream from the evaporator coil. When the space humidity is too high and reheat is energized, this coil uses some of the heat that is normally rejected to the outside by the condenser coil to instead reheat the cold air from the evaporator coil just enough to avoid overcooling and providing “neutral air” to the occupied space. On a two-stage system, it is possible for both a thermostat and humidistat to register readings above set point. Under this condition, the system runs in the high stage dehumidification cycle, and the VFD operates on high speed. This provides dry conditioned air.

Because the demand for dehumidification can be different from the cooling demand, the unit will first satisfy the demand for cooling and then if the space humidity is still too high, dehumidification mode is energized. When in dehumidification mode, the supply air leaving the unit will be near the entering air temperature, but at a much lower humidity. The unit will exit the dehumidification mode when the humidity set point is satisfied; or if the load is increased, it will return to normal cooling mode. Reheat is not available during the gas-heating mode.

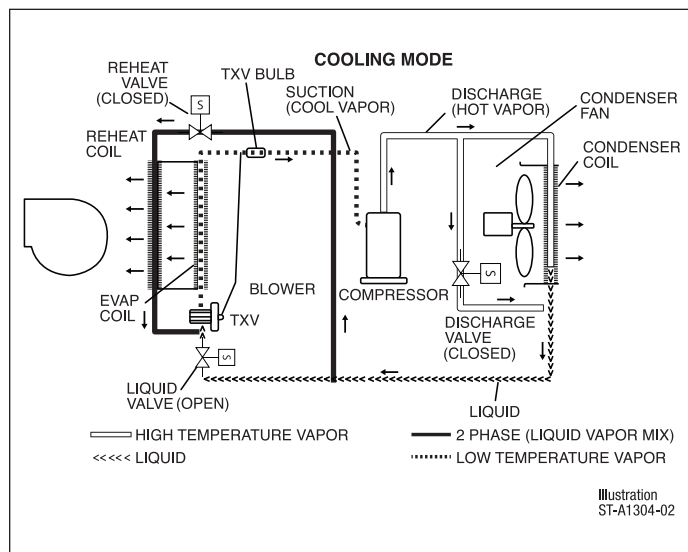

**Figure 1** shows the refrigerant path during the normal cooling mode. The liquid refrigerant leaves the TXV with the sudden pressure drop causing the liquid to expand to a vapor and absorbing the heat from the supply air going through the evaporator coil. The refrigerant vapor then travels to the compressor where it is elevated to a higher pressure and temperature. The superheated refrigerant vapor next carries the heat to the outside coil where the heat is then rejected and the refrigerant condenses into a subcooled liquid where the process repeats itself.

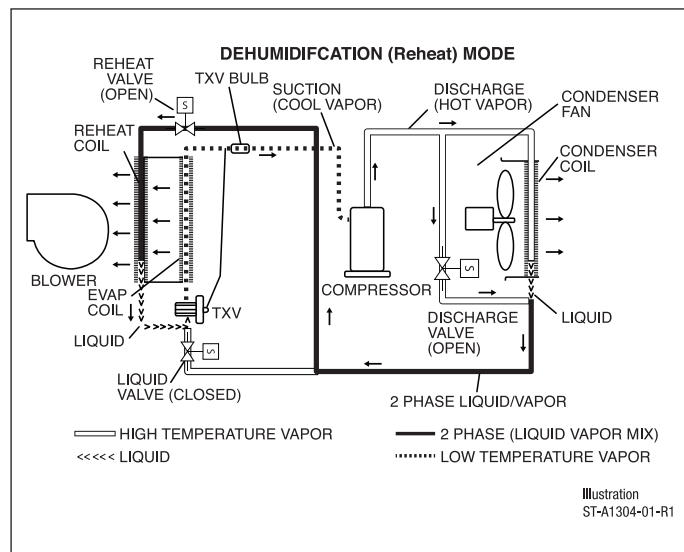

**Figure 2** shows the refrigerant path during the reheat mode. When the reheat cycle is energized by the RTU-C, the reheat solenoid valve, upstream of the reheat coil opens. The liquid solenoid valve ahead of the TXV, closes. The discharge solenoid valve, in the compressor discharge line, opens. The liquid refrigerant leaves the TXV with the sudden pressure drop causing the liquid to expand to a vapor and absorbing the heat from the supply air going through the evaporator coil. The refrigerant vapor then travels to the compressor where it is elevated to a higher pressure and temperature. The refrigerant next carries the heat to a parallel path between the outside condenser coil and a bypass circuit. Some of the heat is rejected outdoors. The ratio of heat rejected outdoors versus indoors is controlled by an outdoor fan motor controller (OFMC) that monitors the two-phase temperature and varies the fan speed. This 2-phase refrigerant vapor is then sent to the reheat coil. As the refrigerant travels through the reheat coil it condenses into a subcooled liquid where the process repeats itself.

| <u>R</u> | <u>AC</u> | <u>C</u> | <u>Y</u> | <u>B</u> | <u>036</u> | <u>A</u> | <u>C</u> | <u>T</u> | <u>10</u> | <u>2</u> | <u>A</u> | <u>A</u> | <u>***</u> |    |    |
|----------|-----------|----------|----------|----------|------------|----------|----------|----------|-----------|----------|----------|----------|------------|----|----|
| 1        | 23        | 4        | 5        | 6        | 789        | 10       | 11       | 12       | 13 14     | 15       | 16       | 17       | 18         | 19 | 20 |

#### 1—Brand

R = Friedrich®

#### 2, 3—Unit Type

AC = Packaged AC

#### 4—Cabinet Type

C = Small Commercial

#### 5—Refrigerant

Y = R-454B

#### 6—Efficiency Level

B = Standard Efficiency

C = High Efficiency

#### 7, 8, 9—Capacity

036 = 3 Ton

048 = 4 Ton

060 = 5 Ton

072 = 6 Ton<sup>1</sup>

#### 10—Major Series

A = 1st Design

#### 11—Voltage

J = 208-230 V, 1 PH, 60 Hz<sup>2</sup>

C = 208-230 V, 3 PH, 60 Hz

D = 460 V, 3 PH, 60 Hz

Y = 575V, 3 PH, 60 Hz<sup>3</sup>

#### 12—Drive

T = Direct Drive Standard Static  
Constant Torque

U = Direct Drive High Static  
Constant Torque<sup>4</sup>

#### 13, 14—Heat Capacity

00 = No Heat

10 = 10 kW<sup>6</sup>

15 = 15 kW

20 = 20 kW

24 = 24 kW<sup>7</sup>

#### 15—Heat Configuration

0 = No stages

1 = 1-stage

2 = 2-stage

#### 16—Control

A = CoreCommand™

(Non-Communicating)

B = CoreCommand &  
Comfort Alert<sup>5</sup>

C = ClearControl™ (DDC)  
& Phase Monitor<sup>5</sup>

D = ClearControl (DDC)  
& Comfort Alert<sup>5</sup>

#### 17—Minor Series

A = 1st Design

#### 18, 19, 20—Option Code

AA0

#### NOTES:

1. 6 ton units are only available with Standard Efficiency
2. J voltage is not available for 24 kW heat capacity or on 6 ton models
3. Y voltage is not available on HumidiDry® models or YC models
4. U drive is not available with J voltage
5. Y Voltage is not available with this Control Option
6. 10 kW electric heat is not available with 6 ton models
7. 24 kW electric heat is not available with 3-5 ton models



## FACTORY-INSTALLED OPTION CODES FOR RACC (3-6 TON)

| 18                                                   |      |    |    |    | 19                                     |      |    | 20                         |      |    |    |
|------------------------------------------------------|------|----|----|----|----------------------------------------|------|----|----------------------------|------|----|----|
| LV = Louver protection                               |      |    |    |    | LF = Low Ambient / Freeze Stat         |      |    | EC = Downflow Economizer   |      |    |    |
| RH <sup>1</sup> = HumidiDry/HGRH<br>(Hot Gas Reheat) |      |    |    |    | NP = Non-powered<br>Convenience Outlet |      |    | SS = Supply Smoke Detector |      |    |    |
| HA = Hinged Access                                   |      |    |    |    |                                        |      |    | RS = Return Smoke Detector |      |    |    |
| CC = Coil Coating                                    |      |    |    |    |                                        |      |    |                            |      |    |    |
| OPTION CODE CHARACTER HIGHLIGHTED BELOW              |      |    |    |    |                                        |      |    |                            |      |    |    |
| A                                                    | None |    |    |    | A                                      | None |    | 0                          | None |    |    |
| B                                                    | LV   |    |    |    | B                                      | LF   |    | 1                          | EC   |    |    |
| C                                                    | HA   |    |    |    | C                                      | NP   |    | 2                          | RS   |    |    |
| D                                                    | LV   | HA |    |    | D                                      | LF   | NP | 3                          | EC   | RS |    |
| E                                                    | LV   | CC |    |    |                                        |      |    | 4                          | SS   | RS |    |
| F                                                    | LV   | HA | CC |    |                                        |      |    | 5                          | EC   | SS | RS |
| N                                                    | RH   |    |    |    |                                        |      |    |                            |      |    |    |
| P                                                    | LV   | RH |    |    |                                        |      |    |                            |      |    |    |
| Q                                                    | RH   | HA |    |    |                                        |      |    |                            |      |    |    |
| R                                                    | LV   | RH | CC |    |                                        |      |    |                            |      |    |    |
| S                                                    | LV   | RH | HA |    |                                        |      |    |                            |      |    |    |
| T                                                    | LV   | RH | HA | CC |                                        |      |    |                            |      |    |    |

<sup>1</sup>RH Models with DDC Controls must include Low Ambient/Freeze Stat (LF)

### Instructions for Factory-Installed Option(s) Selection

Note: Three characters following the model number will be utilized to designate a factory-installed option or combination of options. If no factory option(s) is required, "AAO" follows the model number.

- **Step 1:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 18. For example, the option code character "E" has Louver protection and Coil Coating.
- **Step 2:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 19. For example, the option code character "F" has Low Ambient / Freeze Stat and Disconnect switch.
- **Step 3:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 20. For example, the option code character "3" has Economizer and Return Smoke.
- The resulting option code from examples above is: "EF3"
- **Step 4:** Add your option code selection to the end of model number.

◦ Example: RACCYB036ACT000AA EF3 = RACCYB036ACT000AAEF3



Base model                      Option code                      = Model number with option code

To select an RACC Cooling and Heating unit to meet a job requirement, follow this procedure, with example, using data supplied in this specification sheet.

### 1. DETERMINE COOLING AND HEATING REQUIREMENTS AND SPECIFIC OPERATING CONDITIONS FROM PLANS AND SPECS.

#### Example:

|                                 |                         |
|---------------------------------|-------------------------|
| Voltage—                        | 230 V – 3 Phase – 60 Hz |
| Total Cooling Capacity—         | 47,000 Btu/h [13.8 kW]  |
| Sensible Cooling Capacity—      | 36,000 Btu/h [10.6 kW]  |
| Heating Capacity—               | 29,300 Btu/h [10 kW]    |
| *Condenser Entering Air—        | 95°F [35.0°C] DB        |
| *Evaporator Mixed Air Entering— | 67°F [19.4°C] WB        |
|                                 | 78°F [25.6°C] DB        |
| *Indoor Air Flow (vertical)—    | 1600 CFM [755 L/s]      |
| *External Static Pressure—      | 0.6 in. WG [1.15 kPa]   |

### 2. SELECT UNIT TO MEET COOLING REQUIREMENTS.

Since total cooling is within range of a nominal 4-ton unit, use the cooling performance table at 95°F DB condenser inlet air. Interpolate between 1730 CFM [816 L/s] and 1400 CFM [660 L/s] to determine total and sensible capacity and Depression Ratio for inlet air at 1600CFM [755 L/s] indoor airflow (table basis)

Interpolation Formula:

$$k\text{Btu/h}_1 + \left[ (\text{CFM} - \text{CFM}_1) \times \left( \frac{k\text{Btu/h}_2 - k\text{Btu/h}_1}{\text{CFM}_2 - \text{CFM}_1} \right) \right] = k\text{Btu/h}$$

Total Cooling Capacity:

$$46,800 + \left[ (1,600 - 1,730) \times \left( \frac{45,200 - 46,800}{1,400 - 1,730} \right) \right] = 46,170 \text{ Btu/h}$$

Total Cooling Capacity = 46,800 Btu/h [13.5 kW]

Sensible Cooling Capacity = 33,7400 Btu/h [9.9 kW]

DR = 0.2

When the entering dry bulb temperature (dbE) is not 80°F [26.7°C], the sensible capacity needs to be adjusted.

Note: total capacity is unaffected

Sensible Capacity Depression Formula:

$$\text{Cap}_{\text{sensible}} + [1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$$

$$= 33,740 + [1.10 \times 1,600 \times (1 - 0.2) \times (78 - 80)]$$

$$\text{Sensible Cooling Capacity} = 30,924 \text{ Btu/h [9.1 kW]}$$

### 3. DETERMINE BLOWER SPEED AND BHP TO MEET SYSTEM DESIGN.

Total ESP (external static pressure) per the spec of 0.6 in WG [1.15 kPa] includes the system duct and grilles. Add from the table “Component Air Resistance,” 0.13 in. WG [0.04 kPa] for wet coil. Using the “Airflow Performance Table”, at the specified 1,600 CFM and 0.7 in. WG [0.17 kPa] ESP, determine blower wattage.

CFM = 1564

Watts = 440

Tap = 5

### 3. CALCULATE INDOOR BLOWER BTU/H HEAT EFFECT FROM MOTOR BHP IN STEP 3.

Assuming an average of 85% motor efficiency, determine the amount of heat generated by the blower motor at the specified CFM and ESP by dividing the watts used by the motor efficiency and solving for the difference. Convert this value from watts to Btu/h, multiplying by 3.41 Btu/h/Watt

Watts = 440

Avg. Motor Efficiency = 85%

$$\text{Indoor Blower Motor Heat} = \left[ \left( \frac{\text{Watts}}{0.85} \right) - \text{Watts} \right] \times 3.41$$

$$= [(440/0.85) - 440] \times 3.41 = 77.6 \text{ Btu/h [0.02 kW]}$$

### 5. CALCULATE THE NET COOLING CAPACITIES

Net cooling capacities can be calculated by subtracting the motor heat from the gross cooling capacities.

Net Total Capacity = Gross Total Capacity – Indoor Blower Motor Heat

$$= 46,170 - 77 = 46,093 \text{ Btu/h [13.5 kW]}$$

Net Sensible Capacity = Gross Sensible Capacity – Indoor Blower Motor Heat

$$= 30,924 - 77 = 30,847 \text{ Btu/h [9.0 kW]}$$

### 6. SELECT UNIT HEATING CAPACITY

From “Heater Kit” Table, select kW to meet heating capacity requirement; multiply kW by 3412 to convert to Btu/h.

Use 10 kW Heater Kit

Heater Kit Model:  
RXJJ-DC10CP

Heater Kit Capacity:  
34,120 Btu/h [10 kW]

Add Indoor Blower Motor Heat (step 4) to Heater Kit Capacity to get net total heating capacity:

$$34,120 + 77 = 34,197 \text{ Btu/h [10.0 kW]}$$

### 7. CHOOSE MODEL RACCYB048ACT10

[ ] Designates Metric Conversions

## GENERAL DATA—RACCYB MODELS—3-6 TON

| Model RACCYB Series                          | 036ACT<br>036ADT<br>036AJT | 036ACU                | 036ADU                | 036AYT                | 036AYU                |
|----------------------------------------------|----------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| <b>Cooling Performance<sup>A</sup></b>       |                            |                       |                       |                       | <b>CONTINUED →</b>    |
| Cooling Capacity Btu/h [kW]                  | 36,000 [10.55]             | 36,000 [10.55]        | 36,000 [10.55]        | 36,000 [10.55]        | 36,000 [10.55]        |
| EER2/SEER2 <sup>B</sup>                      | 10.6/13.4                  | 10.6/13.4             | 10.6/13.4             | 10.6/13.4             | 10.6/13.4             |
| Nominal CFM/AHRI Rated CFM [L/s]             | 1,200/1,175 [566/555]      | 1,200/1,175 [566/555] | 1,200/1,175 [566/555] | 1,200/1,175 [566/555] | 1,200/1,175 [566/555] |
| AHRI Net Cooling Capacity Btu/h [kW]         | 34,200 [10.02]             | 34,200 [10.02]        | 34,200 [10.02]        | 34,200 [10.02]        | 34,200 [10.02]        |
| Net Sensible Capacity Btu/h [kW]             | 25,600 [7.5]               | 25,600 [7.5]          | 25,600 [7.5]          | 25,600 [7.5]          | 25,600 [7.5]          |
| Net Latent Capacity Btu/h [kW]               | 8,600 [2.52]               | 8,600 [2.52]          | 8,600 [2.52]          | 8,600 [2.52]          | 8,600 [2.52]          |
| Net System Power kW                          | 2.7                        | 2.7                   | 2.7                   | 2.7                   | 2.7                   |
| <b>Compressor</b>                            |                            |                       |                       |                       |                       |
| No./Type                                     | 1/Scroll                   | 1/Scroll              | 1/Scroll              | 1/Scroll              | 1/Scroll              |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b> |                            |                       |                       |                       |                       |
|                                              | 78                         | 78                    | 78                    | 78                    | 78                    |
| <b>Outdoor Coil - Fin Type</b>               |                            |                       |                       |                       |                       |
| Tube Type                                    | Louvered                   | Louvered              | Louvered              | Louvered              | Louvered              |
| MicroChannel Depth in. [mm]                  | MicroChannel               | MicroChannel          | MicroChannel          | MicroChannel          | MicroChannel          |
| Face Area sq. ft. [sq. m]                    | 0.71 [18]                  | 0.71 [18]             | 0.71 [18]             | 0.71 [18]             | 0.71 [18]             |
| Rows / FPI [FPcm]                            | 16.46 [1.53]               | 16.46 [1.53]          | 16.46 [1.53]          | 16.46 [1.53]          | 16.46 [1.53]          |
|                                              | 1 / 23 [9]                 | 1 / 23 [9]            | 1 / 23 [9]            | 1 / 23 [9]            | 1 / 23 [9]            |
| <b>Indoor Coil - Fin Type</b>                |                            |                       |                       |                       |                       |
| Tube Type                                    | Louvered                   | Louvered              | Louvered              | Louvered              | Louvered              |
| MicroChannel Depth in. [mm]                  | MicroChannel               | MicroChannel          | MicroChannel          | MicroChannel          | MicroChannel          |
| Face Area sq. ft. [sq. m]                    | 1 [25.4]                   | 1 [25.4]              | 1 [25.4]              | 1 [25.4]              | 1 [25.4]              |
| Rows / FPI [FPcm]                            | 7.48 [0.69]                | 7.48 [0.69]           | 7.48 [0.69]           | 7.48 [0.69]           | 7.48 [0.69]           |
|                                              | 1 / 20 [8]                 | 1 / 20 [8]            | 1 / 20 [8]            | 1 / 20 [8]            | 1 / 20 [8]            |
| Refrigerant Control                          | TX Valves                  | TX Valves             | TX Valves             | TX Valves             | TX Valves             |
| Drain Connection No./Size in. [mm]           | 1/0.75 [19.05]             | 1/0.75 [19.05]        | 1/0.75 [19.05]        | 1/0.75 [19.05]        | 1/0.75 [19.05]        |
| <b>Outdoor Fan - Type</b>                    |                            |                       |                       |                       |                       |
| No. Used/Diameter in. [mm]                   | Propeller                  | Propeller             | Propeller             | Propeller             | Propeller             |
| Drive Type/No. Speeds                        | 1/26 [660.4]               | 1/26 [660.4]          | 1/26 [660.4]          | 1/26 [660.4]          | 1/26 [660.4]          |
|                                              | Direct/1                   | Direct/1              | Direct/1              | Direct/1              | Direct/1              |
| CFM [L/s]                                    | 4,250 [2,006]              | 4,250 [2,006]         | 4,250 [2,006]         | 4,250 [2,006]         | 4,250 [2,006]         |
| No. Motors at HP                             | 1 at 1/5                   | 1 at 1/5              | 1 at 1/5              | 1 at 1/5              | 1 at 1/5              |
| Motor RPM                                    | 850                        | 850                   | 850                   | 850                   | 850                   |
| <b>Indoor Fan - Type</b>                     |                            |                       |                       |                       |                       |
| No. Used/Diameter in. [mm]                   | FC Centrifugal             | FC Centrifugal        | FC Centrifugal        | FC Centrifugal        | FC Centrifugal        |
| Drive Type                                   | 1/11x11 [279x279]          | 1/11x11 [279x279]     | 1/11x11 [279x279]     | 1/11x11 [279x279]     | 1/11x11 [279x279]     |
| No. Speeds                                   | Direct                     | Direct                | Direct                | Direct                | Direct                |
| No. Motors                                   | Multiple                   | Multiple              | Multiple              | Multiple              | Multiple              |
| Motor HP                                     | 1                          | 1                     | 1                     | 1                     | 1                     |
| Motor RPM                                    | 3/4                        | 1-1/2                 | 1                     | 3/4                   | 1-1/2                 |
| Motor Frame Size                             | 1,050                      | 1,050                 | 1,050                 | 1,050                 | 1,050                 |
|                                              | 48                         | 48                    | 48                    | 48                    | 48                    |
| <b>Filter - Type</b>                         |                            |                       |                       |                       |                       |
| Furnished                                    | Disposable                 | Disposable            | Disposable            | Disposable            | Disposable            |
| (NO.) Size Recommended in. [mm]              | Yes                        | Yes                   | Yes                   | Yes                   | Yes                   |
|                                              | (4) 2x16x16                | (4) 2x16x16           | (4) 2x16x16           | (4) 2x16x16           | (4) 2x16x16           |
|                                              | [51x406x406]               | [51x406x406]          | [51x406x406]          | [51x406x406]          | [51x406x406]          |
| <b>Refrigerant Charge Oz. [g]</b>            |                            |                       |                       |                       |                       |
| Standard Models                              | 72 [2,041]                 | 72 [2,041]            | 72 [2,041]            | 72 [2,041]            | 72 [2,041]            |
| Reheat Models                                | 101 [2,860]                | 101 [2,860]           | 101 [2,860]           | 101 [2,860]           | 101 [2,860]           |
| <b>Weights</b>                               |                            |                       |                       |                       |                       |
| Net Weight lbs. [kg]                         | 521 [236]                  | 527 [239]             | 527 [239]             | 571 [259]             | 577 [262]             |
| Ship Weight lbs. [kg]                        | 559 [254]                  | 565 [256]             | 565 [256]             | 609 [276]             | 615 [279]             |

See Page 22 for Notes.

[ ] Designates Metric Conversions

## GENERAL DATA—RACCYB MODELS—3-6 TON

| Model RACCYB Series                          | 048ACT<br>048ADT<br>048AJT  | 048ACU                      | 048ADU                      | 048AYT                      | 048AYU                      |
|----------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <b>Cooling Performance<sup>A</sup></b>       |                             |                             |                             |                             | <b>CONTINUED</b> →          |
| Cooling Capacity Btu/h [kW]                  | 48,000 [14.07]              | 48,000 [14.07]              | 48,000 [14.07]              | 48,000 [14.07]              | 48,000 [14.07]              |
| EER2/SEER2 <sup>B</sup>                      | 10.6/13.4                   | 10.6/13.4                   | 10.6/13.4                   | 10.6/13.4                   | 10.6/13.4                   |
| Nominal CFM/AHRI Rated CFM [L/s]             | 1,600/1,570 [755/741]       | 1,600/1,570 [755/741]       | 1,600/1,570 [755/741]       | 1,600/1,570 [755/741]       | 1,600/1,570 [755/741]       |
| AHRI Net Cooling Capacity Btu/h [kW]         | 45,500 [13.33]              | 45,500 [13.33]              | 45,500 [13.33]              | 45,500 [13.33]              | 45,500 [13.33]              |
| Net Sensible Capacity Btu/h [kW]             | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              |
| Net Latent Capacity Btu/h [kW]               | 11,300 [3.31]               | 11,300 [3.31]               | 11,300 [3.31]               | 11,300 [3.31]               | 11,300 [3.31]               |
| Net System Power kW                          | 3.8                         | 3.8                         | 3.8                         | 3.8                         | 3.8                         |
| <b>Compressor</b>                            |                             |                             |                             |                             |                             |
| No./Type                                     | 1/Scroll                    | 1/Scroll                    | 1/Scroll                    | 1/Scroll                    | 1/Scroll                    |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b> | 85.3                        | 85.3                        | 85.3                        | 85.3                        | 85.3                        |
| <b>Outdoor Coil - Fin Type</b>               | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                    | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| MicroChannel Depth in. [mm]                  | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   |
| Face Area sq. ft. [sq. m]                    | 16.46 [1.53]                | 16.46 [1.53]                | 16.46 [1.53]                | 16.46 [1.53]                | 16.46 [1.53]                |
| Rows / FPI [FPcm]                            | 1 / 23 [9]                  | 1 / 23 [9]                  | 1 / 23 [9]                  | 1 / 23 [9]                  | 1 / 23 [9]                  |
| <b>Indoor Coil - Fin Type</b>                | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                    | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| MicroChannel Depth in. [mm]                  | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   |
| Face Area sq. ft. [sq. m]                    | 8.41 [0.78]                 | 8.41 [0.78]                 | 8.41 [0.78]                 | 8.41 [0.78]                 | 8.41 [0.78]                 |
| Rows / FPI [FPcm]                            | 1 / 20 [8]                  | 1 / 20 [8]                  | 1 / 20 [8]                  | 1 / 20 [8]                  | 1 / 20 [8]                  |
| Refrigerant Control                          | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   |
| Drain Connection No./Size in. [mm]           | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              |
| <b>Outdoor Fan - Type</b>                    | Propeller                   | Propeller                   | Propeller                   | Propeller                   | Propeller                   |
| No. Used/Diameter in. [mm]                   | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                |
| Drive Type/No. Speeds                        | Direct/1                    | Direct/1                    | Direct/1                    | Direct/1                    | Direct/1                    |
| CFM [L/s]                                    | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               |
| No. Motors at HP                             | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 |
| Motor RPM                                    | 1,075                       | 1,075                       | 1,075                       | 1,075                       | 1,075                       |
| <b>Indoor Fan - Type</b>                     | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              |
| No. Used/Diameter in. [mm]                   | 1/11x11 [279x279]           | 1/11x11 [279x279]           | 1/11x11 [279x279]           | 1/11x11 [279x279]           | 1/11x11 [279x279]           |
| Drive Type                                   | Direct                      | Direct                      | Direct                      | Direct                      | Direct                      |
| No. Speeds                                   | Multiple                    | Multiple                    | Multiple                    | Multiple                    | Multiple                    |
| No. Motors                                   | 1                           | 1                           | 1                           | 1                           | 1                           |
| Motor HP                                     | 3/4                         | 1-1/2                       | 1                           | 3/4                         | 1-1/2                       |
| Motor RPM                                    | 1,050                       | 1,050                       | 1,050                       | 1,050                       | 1,050                       |
| Motor Frame Size                             | 48                          | 48                          | 48                          | 48                          | 48                          |
| <b>Filter - Type</b>                         | Disposable                  | Disposable                  | Disposable                  | Disposable                  | Disposable                  |
| Furnished                                    | Yes                         | Yes                         | Yes                         | Yes                         | Yes                         |
| (NO.) Size Recommended in. [mm]              | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] |
| <b>Refrigerant Charge Oz. [g]</b>            |                             |                             |                             |                             |                             |
| Standard Models                              | 67 [1,899]                  | 67 [1,899]                  | 67 [1,899]                  | 67 [1,899]                  | 67 [1,899]                  |
| Reheat Models                                | 110 [3,120]                 | 110 [3,120]                 | 110 [3,120]                 | 110 [3,120]                 | 110 [3,120]                 |
| <b>Weights</b>                               |                             |                             |                             |                             |                             |
| Net Weight lbs. [kg]                         | 548 [249]                   | 554 [251]                   | 554 [251]                   | 598 [271]                   | 604 [274]                   |
| Ship Weight lbs. [kg]                        | 586 [266]                   | 592 [269]                   | 592 [269]                   | 636 [288]                   | 642 [291]                   |

See Page 22 for Notes.

[ ] Designates Metric Conversions

# GENERAL DATA—RACCYB MODELS—3-6 TON

| Model RACCYB Series                          | 060ACT<br>060ADT<br>060AJT  | 060ACU                      | 060ADU                      | 060AYT                      | 060AYU                      |
|----------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <b>Cooling Performance<sup>A</sup></b>       |                             |                             |                             |                             | <b>CONTINUED</b> →          |
| Cooling Capacity Btu/h [kW]                  | 60,000 [17.58]              | 60,000 [17.58]              | 60,000 [17.58]              | 60,000 [17.58]              | 60,000 [17.58]              |
| EER2/SEER2 <sup>B</sup>                      | 10.6/13.4                   | 10.6/13.4                   | 10.6/13.4                   | 10.6/13.4                   | 10.6/13.4                   |
| Nominal CFM/AHRI Rated CFM [L/s]             | 2,000/1,825 [944/861]       | 2,000/1,825 [944/861]       | 2,000/1,825 [944/861]       | 2,000/1,825 [944/861]       | 2,000/1,825 [944/861]       |
| AHRI Net Cooling Capacity Btu/h [kW]         | 57,000 [16.71]              | 57,000 [16.71]              | 57,000 [16.71]              | 57,000 [16.71]              | 57,000 [16.71]              |
| Net Sensible Capacity Btu/h [kW]             | 43,000 [12.6]               | 43,000 [12.6]               | 43,000 [12.6]               | 43,000 [12.6]               | 43,000 [12.6]               |
| Net Latent Capacity Btu/h [kW]               | 14,000 [4.1]                | 14,000 [4.1]                | 14,000 [4.1]                | 14,000 [4.1]                | 14,000 [4.1]                |
| Net System Power kW                          | 5.0                         | 5.0                         | 5.0                         | 5.0                         | 5.0                         |
| <b>Compressor</b>                            |                             |                             |                             |                             |                             |
| No./Type                                     | 1/Scroll                    | 1/Scroll                    | 1/Scroll                    | 1/Scroll                    | 1/Scroll                    |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b> |                             |                             |                             |                             |                             |
|                                              | 86                          | 86                          | 86                          | 86                          | 86                          |
| <b>Outdoor Coil - Fin Type</b>               |                             |                             |                             |                             |                             |
| Louvered                                     | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                    | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| MicroChannel Depth in. [mm]                  | 0.63 [16]                   | 0.63 [16]                   | 0.63 [16]                   | 0.63 [16]                   | 0.63 [16]                   |
| Face Area sq. ft. [sq. m]                    | 16.46 [1.53]                | 16.46 [1.53]                | 16.46 [1.53]                | 16.46 [1.53]                | 16.66 [1.55]                |
| Rows / FPI [FPcm]                            | 1 / 23 [9]                  | 1 / 23 [9]                  | 1 / 23 [9]                  | 1 / 23 [9]                  | 1 / 23 [9]                  |
| <b>Indoor Coil - Fin Type</b>                |                             |                             |                             |                             |                             |
| Louvered                                     | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                    | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| MicroChannel Depth in. [mm]                  | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   |
| Face Area sq. ft. [sq. m]                    | 8.41 [0.78]                 | 8.41 [0.78]                 | 8.41 [0.78]                 | 8.41 [0.78]                 | 8.41 [0.78]                 |
| Rows / FPI [FPcm]                            | 1 / 20 [8]                  | 1 / 20 [8]                  | 1 / 20 [8]                  | 1 / 20 [8]                  | 1 / 20 [8]                  |
| Refrigerant Control                          | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   |
| Drain Connection No./Size in. [mm]           | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              |
| <b>Outdoor Fan - Type</b>                    |                             |                             |                             |                             |                             |
| Propeller                                    | Propeller                   | Propeller                   | Propeller                   | Propeller                   | Propeller                   |
| No. Used/Diameter in. [mm]                   | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                |
| Drive Type/No. Speeds                        | Direct/1                    | Direct/1                    | Direct/1                    | Direct/1                    | Direct/1                    |
| CFM [L/s]                                    | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               |
| No. Motors at HP                             | 1 at 1/2                    | 1 at 1/2                    | 1 at 1/2                    | 1 at 1/2                    | 1 at 1/2 HP                 |
| Motor RPM                                    | 1,075                       | 1,075                       | 1,075                       | 1,075                       | 1,075                       |
| <b>Indoor Fan - Type</b>                     |                             |                             |                             |                             |                             |
| FC Centrifugal                               | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              |
| No. Used/Diameter in. [mm]                   | 1/11x11 [279x279]           | 1/11x11 [279x279]           | 1/11x11 [279x279]           | 1/11x11 [279x279]           | 1/11x11 [279x279]           |
| Drive Type                                   | Direct                      | Direct                      | Direct                      | Direct                      | Direct                      |
| No. Speeds                                   | Multiple                    | Multiple                    | Multiple                    | Multiple                    | Multiple                    |
| No. Motors                                   | 1                           | 1                           | 1                           | 1                           | 1                           |
| Motor HP                                     | 1                           | 1-1/2                       | 1-1/5                       | 1                           | 1-1/2                       |
| Motor RPM                                    | 1,050                       | 1,050                       | 1,050                       | 1,050                       | 1,050                       |
| Motor Frame Size                             | 48                          | 48                          | 48                          | 48                          | 48                          |
| <b>Filter - Type</b>                         |                             |                             |                             |                             |                             |
| Disposable                                   | Disposable                  | Disposable                  | Disposable                  | Disposable                  | Disposable                  |
| Furnished                                    | Yes                         | Yes                         | Yes                         | Yes                         | Yes                         |
| (NO.) Size Recommended in. [mm]              | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] |
| <b>Refrigerant Charge Oz. [g]</b>            |                             |                             |                             |                             |                             |
| Standard Models                              | 80 [2,268]                  | 80 [2,268]                  | 80 [2,268]                  | 80 [2,268]                  | 80 [2,268]                  |
| Reheat Models                                | 105 [2,980]                 | 105 [2,980]                 | 105 [2,980]                 | 105 [2,980]                 | 105 [2,980]                 |
| <b>Weights</b>                               |                             |                             |                             |                             |                             |
| Net Weight lbs. [kg]                         | 551 [250]                   | 557 [253]                   | 557 [253]                   | 601 [273]                   | 607 [275]                   |
| Ship Weight lbs. [kg]                        | 589 [267]                   | 595 [270]                   | 595 [270]                   | 639 [290]                   | 645 [293]                   |

See Page 22 for Notes.

[ ] Designates Metric Conversions

## GENERAL DATA—RACCYB MODELS—3-6 TON

| Model RACCYB Series                          | 072ACT<br>072ADT             | 072ACU<br>072ADU             | 072ADU                       | 072AYT                       | 072AYU                       |
|----------------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| <b>Cooling Performance<sup>A</sup></b>       |                              |                              |                              |                              | <b>CONTINUED →</b>           |
| Cooling Capacity Btu/h [kW]                  | 72,000 [21.1]                | 72,000 [21.1]                | 72,000 [21.1]                | 72,000 [21.1]                | 72,000 [21.1]                |
| EER/IEER <sup>D</sup>                        | 11.2/14.8                    | 11.2/14.8                    | 11.2/14.8                    | 11.2/14.8                    | 11.2/14.8                    |
| Nominal CFM/AHRI Rated CFM [L/s]             | 2,400/2,400<br>[1,133/1,133] | 2,400/2,400<br>[1,133/1,133] | 2,400/2,400<br>[1,133/1,133] | 2,400/2,400<br>[1,133/1,133] | 2,400/2,400<br>[1,133/1,133] |
| AHRI Net Cooling Capacity Btu/h [kW]         | 68,500 [20.08]               | 68,500 [20.08]               | 68,500 [20.08]               | 68,500 [20.08]               | 68,500 [20.08]               |
| Net Sensible Capacity Btu/h [kW]             | 51,500 [15.09]               | 51,500 [15.09]               | 51,500 [15.09]               | 51,500 [15.09]               | 51,500 [15.09]               |
| Net Latent Capacity Btu/h [kW]               | 17,000 [4.98]                | 17,000 [4.98]                | 17,000 [4.98]                | 17,000 [4.98]                | 17,000 [4.98]                |
| Net System Power kW                          | 6.2                          | 6.2                          | 6.2                          | 6.2                          | 6.2                          |
| <b>Compressor</b>                            |                              |                              |                              |                              |                              |
| No./Type                                     | 1/Scroll                     | 1/Scroll                     | 1/Scroll                     | 1/Scroll                     | 1/Scroll                     |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b> | 85                           | 85                           | 85                           | 85                           | 85                           |
| <b>Outdoor Coil - Fin Type</b>               | Louvered                     | Louvered                     | Louvered                     | Louvered                     | Louvered                     |
| Tube Type                                    | MicroChannel                 | MicroChannel                 | MicroChannel                 | MicroChannel                 | MicroChannel                 |
| MicroChannel Depth in. [mm]                  | 0.71 [18]                    | 0.71 [18]                    | 0.71 [18]                    | 0.71 [18]                    | 0.71 [18]                    |
| Face Area sq. ft. [sq. m]                    | 16.46 [1.53]                 | 16.46 [1.53]                 | 16.46 [1.53]                 | 16.46 [1.53]                 | 16.46 [1.53]                 |
| Rows / FPI [FPcm]                            | 1 / 23 [9]                   | 1 / 23 [9]                   | 1 / 23 [9]                   | 1 / 23 [9]                   | 1 / 23 [9]                   |
| <b>Indoor Coil - Fin Type</b>                | Louvered                     | Louvered                     | Louvered                     | Louvered                     | Louvered                     |
| Tube Type                                    | MicroChannel                 | MicroChannel                 | MicroChannel                 | MicroChannel                 | MicroChannel                 |
| MicroChannel Depth in. [mm]                  | 1.26 [32]                    | 1.26 [32]                    | 1.26 [32]                    | 1.26 [32]                    | 1.26 [32]                    |
| Face Area sq. ft. [sq. m]                    | 8.41 [0.78]                  | 8.41 [0.78]                  | 8.41 [0.78]                  | 8.41 [0.78]                  | 8.41 [0.78]                  |
| Rows / FPI [FPcm]                            | 1 / 20 [8]                   | 1 / 20 [8]                   | 1 / 20 [8]                   | 1 / 20 [8]                   | 1 / 20 [8]                   |
| Refrigerant Control                          | TX Valves                    | TX Valves                    | TX Valves                    | TX Valves                    | TX Valves                    |
| Drain Connection No./Size in. [mm]           | 1/0.75 [19.05]               | 1/0.75 [19.05]               | 1/0.75 [19.05]               | 1/0.75 [19.05]               | 1/0.75 [19.05]               |
| <b>Outdoor Fan - Type</b>                    | Propeller                    | Propeller                    | Propeller                    | Propeller                    | Propeller                    |
| No. Used/Diameter in. [mm]                   | 1/26 [660.4]                 | 1/26 [660.4]                 | 1/26 [660.4]                 | 1/26 [660.4]                 | 1/26 [660.4]                 |
| Drive Type/No. Speeds                        | Direct/1                     | Direct/1                     | Direct/1                     | Direct/1                     | Direct/1                     |
| CFM [L/s]                                    | 5,900 [2,784]                | 5,900 [2,784]                | 5,900 [2,784]                | 5,900 [2,784]                | 5,900 [2,784]                |
| No. Motors at HP                             | 1 at 3/4                     | 1 at 3/4                     | 1 at 3/4                     | 1 at 3/4                     | 1 at 3/4                     |
| Motor RPM                                    | 1,100                        | 1,100                        | 1,100                        | 1,100                        | 1,100                        |
| <b>Indoor Fan - Type</b>                     | FC Centrifugal               | FC Centrifugal               | FC Centrifugal               | FC Centrifugal               | FC Centrifugal               |
| No. Used/Diameter in. [mm]                   | 1/11x11 [279x279]            | 1/11x11 [279x279]            | 1/11x11 [279x279]            | 1/11x11 [279x279]            | 1/11x11 [279x279]            |
| Drive Type                                   | Direct                       | Direct                       | Direct                       | Direct                       | Direct                       |
| No. Speeds                                   | Multiple                     | Multiple                     | Multiple                     | Multiple                     | Multiple                     |
| No. Motors                                   | 1                            | 1                            | 1                            | 1                            | 1                            |
| Motor HP                                     | 1-1/5                        | 1-1/5                        | 1-1/5                        | 1-1/5                        | 1-1/5                        |
| Motor RPM                                    | 1,300                        | 1,300                        | 1,300                        | 1,300                        | 1,300                        |
| Motor Frame Size                             | 48                           | 48                           | 48                           | 48                           | 48                           |
| <b>Filter - Type</b>                         | Disposable                   | Disposable                   | Disposable                   | Disposable                   | Disposable                   |
| Furnished                                    | Yes                          | Yes                          | Yes                          | Yes                          | Yes                          |
| (NO.) Size Recommended in. [mm]              | (4) 2x16x16<br>[51x406x406]  | (4) 2x16x16<br>[51x406x406]  | (4) 2x16x16<br>[51x406x406]  | (4) 2x16x16<br>[51x406x406]  | (4) 2x16x16<br>[51x406x406]  |
| <b>Refrigerant Charge Oz. [g]</b>            |                              |                              |                              |                              |                              |
| Standard Models                              | 85 [2,410]                   | 85 [2,410]                   | 85 [2,410]                   | 85 [2,410]                   | 85 [2,410]                   |
| Reheat Models                                | 123 [3,490]                  | 123 [3,490]                  | 123 [3,490]                  | 123 [3,490]                  | 123 [3,490]                  |
| <b>Weights</b>                               |                              |                              |                              |                              |                              |
| Net Weight lbs. [kg]                         | 557 [253]                    | 557 [253]                    | 557 [253]                    | 607 [275]                    | 607 [275]                    |
| Ship Weight lbs. [kg]                        | 595 [270]                    | 595 [270]                    | 595 [270]                    | 645 [293]                    | 645 [293]                    |

See Page 22 for Notes.

[ ] Designates Metric Conversions



## GENERAL DATA—RACCYC MODELS—3-5 TON

| Model RACCYC Series                                  | 036AJT                      | 036ACT                      | 036ACU                      | 036ADT                      | 036ADU                      |
|------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <b>Cooling Performance<sup>A</sup></b>               | <b>CONTINUED →</b>          |                             |                             |                             |                             |
| Gross Cooling Capacity Btu/h [kW]                    | 36,000 [10.55]              | 36,000 [10.55]              | 36,000 [10.55]              | 36,000 [10.55]              | 36,000 [10.55]              |
| EER2/SEER2 <sup>B</sup>                              | 12/16.2                     | 12/16.2                     | 12/16.2                     | 12/16.2                     | 12/16.2                     |
| Nominal CFM/ AHRI Rated CFM [L/s]                    | 1,200/1,055 [566/498]       | 1,200/1,055 [566/498]       | 1,200/1,055 [566/498]       | 1,200/1,055 [566/498]       | 1,200/1,055 [566/498]       |
| AHRI Net Cooling Capacity Btu/h [kW]                 | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              |
| Net Sensible Capacity Btu/h [kW]                     | 25,600 [7.5]                | 25,600 [7.5]                | 25,600 [7.5]                | 25,600 [7.5]                | 25,600 [7.5]                |
| Net Latent Capacity Btu/h [kW]                       | 8,600 [2.52]                | 8,600 [2.52]                | 8,600 [2.52]                | 8,600 [2.52]                | 8,600 [2.52]                |
| Net System Power [kW]                                | 3.23                        | 3.23                        | 3.23                        | 3.23                        | 3.23                        |
| <b>Compressor</b>                                    |                             |                             |                             |                             |                             |
| No./Stage/Type                                       | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b>         | 79                          | 79                          | 79                          | 79                          | 79                          |
| <b>Outdoor Coil - Fin Type</b>                       | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                            | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| Rifled: Tube Size OD or MicroChannel: Depth in. [mm] | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   |
| Face Area sq. ft. [sq. m]                            | 16.72 [1.55]                | 16.72 [1.55]                | 16.72 [1.55]                | 16.72 [1.55]                | 16.72 [1.55]                |
| Rows / FPI [FPcm]                                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    |
| <b>Indoor Coil - Fin Type</b>                        | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                            | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| Rifled: Tube Size OD or MicroChannel: Depth in. [mm] | 1 [25.4]                    | 1 [25.4]                    | 1 [25.4]                    | 1 [25.4]                    | 1 [25.4]                    |
| Face Area sq. ft. [sq. m]                            | 7.49 [0.69]                 | 7.49 [0.69]                 | 7.49 [0.69]                 | 7.49 [0.69]                 | 7.49 [0.69]                 |
| Rows / FPI [FPcm]                                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    |
| Refrigerant Control                                  | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   |
| Drain Connection No./Size in. [mm]                   | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              |
| <b>Outdoor Fan - Type</b>                            | Propeller                   | Propeller                   | Propeller                   | Propeller                   | Propeller                   |
| No. Used/Diameter in. [mm]                           | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                |
| Drive Type/No. Speeds                                | Direct/2                    | Direct/2                    | Direct/2                    | Direct/2                    | Direct/2                    |
| CFM [L/s]                                            | 4,850 [2,289]               | 4,850 [2,289]               | 4,850 [2,289]               | 4,850 [2,289]               | 4,850 [2,289]               |
| No. Motors at HP                                     | 1 at 1/3 HP                 | 1 at 1/3 HP                 | 1 at 1/3 HP                 | 1 at 1/3 HP                 | 1 at 1/3 HP                 |
| Motor RPM Low Stage / High Stage                     | 800/440                     | 800/440                     | 800/440                     | 800/440                     | 800/440                     |
| <b>Indoor Fan - Type</b>                             | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              |
| No. Used/Diameter in. [mm]                           | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               |
| Drive Type                                           | Direct                      | Direct                      | Direct                      | Direct                      | Direct                      |
| No. Speeds                                           | Multiple                    | Multiple                    | Multiple                    | Multiple                    | Multiple                    |
| No. Motors                                           | 1                           | 1                           | 1                           | 1                           | 1                           |
| Motor HP                                             | 3/4                         | 3/4                         | 1-1/2                       | 3/4                         | 1                           |
| Motor RPM                                            | 1,050                       | 1,050                       | 1,400                       | 1,050                       | 1,050                       |
| Motor Frame Size                                     | 48                          | 48                          | 48                          | 48                          | 48                          |
| <b>Filter - Type</b>                                 | Disposable                  | Disposable                  | Disposable                  | Disposable                  | Disposable                  |
| Furnished                                            | Yes                         | Yes                         | Yes                         | Yes                         | Yes                         |
| (NO.) Size Recommended in. [mm]                      | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] |
| <b>Refrigerant Charge Oz. [g]</b>                    |                             |                             |                             |                             |                             |
| Standard Models                                      | 66 [1,871.1]                | 66 [1,871.1]                | 66 [1,871.1]                | 66 [1,871.1]                | 66 [1,871.1]                |
| Reheat Models                                        | 106 [3,010]                 | 106 [3,010]                 | 106 [3,010]                 | 106 [3,010]                 | 106 [3,010]                 |
| <b>Weights</b>                                       |                             |                             |                             |                             |                             |
| Net Weight lbs. [kg]                                 | 561.1 [254.5]               | 560.1 [254.1]               | 560.1 [254.1]               | 558.7 [253.4]               | 558.7 [253.4]               |
| Ship Weight lbs. [kg]                                | 599.1 [271.7]               | 598.1 [271.3]               | 598.1 [271.3]               | 596.7 [270.7]               | 596.7 [270.7]               |

See Page 22 for Notes.

[ ] Designates Metric Conversions

## GENERAL DATA—RACCYC MODELS—3-5 TON

| Model RACCYC Series                          | 048AJT                      | 048ACT                      | 048ACU                      | 048ADT                      | 048ADU                      |
|----------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <b>Cooling Performance<sup>A</sup></b>       |                             |                             |                             |                             | <b>CONTINUED →</b>          |
| Cooling Capacity Btu/h [kW]                  | 48,000 [14.07]              | 48,000 [14.07]              | 48,000 [14.07]              | 48,000 [14.07]              | 48,000 [14.07]              |
| EER2/SEER2 <sup>B</sup>                      | 12/16.2                     | 12/16.2                     | 12/16.2                     | 12/16.2                     | 12/16.2                     |
| Nominal CFM/AHRI Rated CFM [L/s]             | 1,600/1,460 [755/689]       | 1,600/1,460 [755/689]       | 1,600/1,460 [755/689]       | 1,600/1,460 [755/689]       | 1,600/1,460 [755/689]       |
| AHRI Net Cooling Capacity Btu/h [kW]         | 45,500 [13.34]              | 45,500 [13.34]              | 45,500 [13.34]              | 45,500 [13.34]              | 45,500 [13.34]              |
| Net Sensible Capacity Btu/h [kW]             | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              | 34,200 [10.02]              |
| Net Latent Capacity Btu/h [kW]               | 11,300 [3.31]               | 11,300 [3.31]               | 11,300 [3.31]               | 11,300 [3.31]               | 11,300 [3.31]               |
| Net System Power kW                          | 4.29                        | 4.29                        | 4.29                        | 4.29                        | 4.29                        |
| <b>Compressor</b>                            |                             |                             |                             |                             |                             |
| No./Stage/Type                               | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b> | 83                          | 83                          | 83                          | 83                          | 83                          |
| <b>Outdoor Coil - Fin Type</b>               | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                    | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| MicroChannel Depth in. [mm]                  | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   |
| Face Area sq. ft. [sq. m]                    | 16.72 [1.55]                | 16.72 [1.55]                | 16.72 [1.55]                | 16.72 [1.55]                | 16.72 [1.55]                |
| Rows / FPI [FPcm]                            | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    |
| <b>Indoor Coil - Fin Type</b>                | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| Tube Type                                    | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| MicroChannel Depth in. [mm]                  | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   |
| Face Area sq. ft. [sq. m]                    | 7.49 [0.69]                 | 7.49 [0.69]                 | 7.49 [0.69]                 | 7.49 [0.69]                 | 7.49 [0.69]                 |
| Rows / FPI [FPcm]                            | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    |
| Refrigerant Control                          | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   |
| Drain Connection No./Size in. [mm]           | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              |
| <b>Outdoor Fan - Type</b>                    | Propeller                   | Propeller                   | Propeller                   | Propeller                   | Propeller                   |
| No. Used/Diameter in. [mm]                   | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                |
| Drive Type/No. Speeds                        | Direct/2                    | Direct/2                    | Direct/2                    | Direct/2                    | Direct/2                    |
| CFM [L/s]                                    | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               |
| No. Motors at HP                             | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 |
| Motor RPM Low Stage / High Stage             | 900/800                     | 900/800                     | 900/800                     | 900/800                     | 900/800                     |
| <b>Indoor Fan - Type</b>                     | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              |
| No. Used/Diameter in. [mm]                   | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               |
| Drive Type                                   | Direct                      | Direct                      | Direct                      | Direct                      | Direct                      |
| No. Speeds                                   | Multiple                    | Multiple                    | Multiple                    | Multiple                    | Multiple                    |
| No. Motors                                   | 1                           | 1                           | 1                           | 1                           | 1                           |
| Motor HP                                     | 3/4                         | 3/4                         | 1-1/2                       | 3/4                         | 1                           |
| Motor RPM                                    | 1,050                       | 1,050                       | 1,400                       | 1,050                       | 1,050                       |
| Motor Frame Size                             | 48                          | 48                          | 48                          | 48                          | 48                          |
| <b>Filter - Type</b>                         | Disposable                  | Disposable                  | Disposable                  | Disposable                  | Disposable                  |
| Furnished                                    | Yes                         | Yes                         | Yes                         | Yes                         | Yes                         |
| (NO.) Size Recommended in. [mm]              | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] |
| <b>Refrigerant Charge Oz. [g]</b>            |                             |                             |                             |                             |                             |
| Standard Models                              | 75 [2,126.2]                | 75 [2,126.2]                | 75 [2,126.2]                | 75 [2,126.2]                | 75 [2,126.2]                |
| Reheat Models                                | 116 [3,290]                 | 116 [3,290]                 | 116 [3,290]                 | 116 [3,290]                 | 116 [3,290]                 |
| <b>Weights</b>                               |                             |                             |                             |                             |                             |
| Net Weight lbs. [kg]                         | 581.3 [263.7]               | 581.3 [263.7]               | 581.3 [263.7]               | 578.17 [262.3]              | 578.17 [262.3]              |
| Ship Weight lbs. [kg]                        | 619.3 [280.9]               | 619.3 [280.9]               | 619.3 [280.9]               | 616.17 [279.5]              | 616.17 [279.5]              |

See Page 22 for Notes.

[ ] Designates Metric Conversions

## GENERAL DATA—RACCYC MODELS—3-5 TON

| Model RACCYC Series                          | 060AJT                      | 060ACT                      | 060ACU                      | 060ADT                      | 060ADU                      |
|----------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <b>Cooling Performance<sup>A</sup></b>       |                             |                             |                             |                             |                             |
| Cooling Capacity Btu/h [kW]                  | 60,000 [17.58]              | 60,000 [17.58]              | 60,000 [17.58]              | 60,000 [17.58]              | 60,000 [17.58]              |
| EER2/SEER2 <sup>B</sup>                      | 12/16.2                     | 12/16.2                     | 12/16.2                     | 12/16.2                     | 12/16.2                     |
| Nominal CFM/AHRI Rated CFM [L/s]             | 2,000/1,840 [944/868]       | 2,000/1,840 [944/868]       | 2,000/1,840 [944/868]       | 2,000/1,840 [944/868]       | 2,000/1,840 [944/868]       |
| AHRI Net Cooling Capacity Btu/h [kW]         | 57,000 [16.71]              | 57,000 [16.71]              | 57,000 [16.71]              | 57,000 [16.71]              | 57,000 [16.71]              |
| Net Sensible Capacity Btu/h [kW]             | 43,000 [12.6]               | 43,000 [12.6]               | 43,000 [12.6]               | 43,000 [12.6]               | 43,000 [12.6]               |
| Net Latent Capacity Btu/h [kW]               | 14,000 [4.1]                | 14,000 [4.1]                | 14,000 [4.1]                | 14,000 [4.1]                | 14,000 [4.1]                |
| Net System Power kW                          | 5.38                        | 5.38                        | 5.38                        | 5.38                        | 5.38                        |
| <b>Compressor</b>                            |                             |                             |                             |                             |                             |
| No./Stage/Type                               | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  | 1/2/Scroll                  |
| <b>Outdoor Sound Rating (dB)<sup>C</sup></b> |                             |                             |                             |                             |                             |
|                                              | 86                          | 86                          | 86                          | 86                          | 86                          |
| <b>Outdoor Coil - Fin Type</b>               |                             |                             |                             |                             |                             |
| Tube Type                                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| MicroChannel Depth in. [mm]                  | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| Face Area sq. ft. [sq. m]                    | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   | 0.71 [18]                   |
| Rows / FPI [FPCm]                            | 16.66 [1.55]                | 16.66 [1.55]                | 16.66 [1.55]                | 16.66 [1.55]                | 16.66 [1.55]                |
|                                              | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    | 1/23 [9]                    |
| <b>Indoor Coil - Fin Type</b>                |                             |                             |                             |                             |                             |
| Tube Type                                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    | Louvered                    |
| MicroChannel Depth in. [mm]                  | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                | MicroChannel                |
| Face Area sq. ft. [sq. m]                    | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   | 1.26 [32]                   |
| Rows / FPI [FPCm]                            | 7.47 [0.69]                 | 7.47 [0.69]                 | 7.47 [0.69]                 | 7.47 [0.69]                 | 7.47 [0.69]                 |
|                                              | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    | 1/20 [8]                    |
| Refrigerant Control                          | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   | TX Valves                   |
| Drain Connection No./Size in. [mm]           | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              | 1/0.75 [19.05]              |
| <b>Outdoor Fan - Type</b>                    |                             |                             |                             |                             |                             |
| Propeller                                    | Propeller                   | Propeller                   | Propeller                   | Propeller                   | Propeller                   |
| No. Used/Diameter in. [mm]                   | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                | 1/26 [660.4]                |
| Drive Type/No. Speeds                        | Direct/2                    | Direct/2                    | Direct/2                    | Direct/2                    | Direct/2                    |
| CFM [L/s]                                    | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               | 5,900 [2,784]               |
| No. Motors at HP                             | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 | 1 at 1/2 HP                 |
| Motor RPM Low Stage / High Stage             | 900/800                     | 900/800                     | 900/800                     | 900/800                     | 900/800                     |
| <b>Indoor Fan - Type</b>                     |                             |                             |                             |                             |                             |
| FC Centrifugal                               | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              | FC Centrifugal              |
| No. Used/Diameter in. [mm]                   | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               | 1/5.6 [142.2]               |
| Drive Type                                   | Direct                      | Direct                      | Direct                      | Direct                      | Direct                      |
| No. Speeds                                   | Multiple                    | Multiple                    | Multiple                    | Multiple                    | Multiple                    |
| No. Motors                                   | 1                           | 1                           | 1                           | 1                           | 1                           |
| Motor HP                                     | 1                           | 1                           | 1-1/2                       | 1                           | 1-1/5                       |
| Motor RPM                                    | 1,050                       | 1,050                       | 1,400                       | 1,050                       | 1,300                       |
| Motor Frame Size                             | 48                          | 48                          | 48                          | 48                          | 48                          |
| <b>Filter - Type</b>                         |                             |                             |                             |                             |                             |
| Disposible                                   | Disposible                  | Disposible                  | Disposible                  | Disposible                  | Disposible                  |
| Furnished                                    | Yes                         | Yes                         | Yes                         | Yes                         | Yes                         |
| (NO.) Size Recommended in. [mm]              | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] | (4) 2x16x16<br>[51x406x406] |
| <b>Refrigerant Charge Oz. [g]</b>            |                             |                             |                             |                             |                             |
| Standard Models                              | 81 [2,296.3]                | 81 [2,296.3]                | 81 [2,296.3]                | 81 [2,296.3]                | 81 [2,296.3]                |
| Reheat Models                                | 121 [3,430]                 | 121 [3,430]                 | 121 [3,430]                 | 121 [3,430]                 | 121 [3,430]                 |
| <b>Weights</b>                               |                             |                             |                             |                             |                             |
| Net Weight lbs. [kg]                         | 583.8 [264.8]               | 583.8 [264.8]               | 583.8 [264.8]               | 583.8 [264.8]               | 583.8 [264.8]               |
| Ship Weight lbs. [kg]                        | 621.8 [282.1]               | 621.8 [282.1]               | 621.8 [282.1]               | 621.8 [282.1]               | 621.8 [282.1]               |

See Page 22 for Notes.

[ ] Designates Metric Conversions

## **NOTES:**

- A. Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to  $\pm 20\%$  of nominal CFM. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240.
- B EER/EER2 and SEER2 are rated at AHRI conditions and in accordance with DOE test procedures. Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI Standard 340/360.
- C. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
- D. Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI Standard 340/360.

## WEIGHTED SOUND POWER LEVEL (dBA)

| Unit Size – Series | Standard Rating (dBA) | TYPICAL OCTAVE BAND SPECTRUM (dBA without tone adjustment) |      |      |      |      |      |      |      |
|--------------------|-----------------------|------------------------------------------------------------|------|------|------|------|------|------|------|
|                    |                       | 63                                                         | 125  | 250  | 500  | 1000 | 2000 | 4000 | 8000 |
| RACCYB036          | 78.0                  | 48.7                                                       | 58.1 | 63.9 | 67.0 | 67.8 | 64.7 | 60.6 | 54.7 |
| RACCYB048          | 85.3                  | 58.2                                                       | 64.7 | 75.1 | 74.7 | 75.5 | 72.3 | 67.8 | 61.0 |
| RACCYB060          | 86.0                  | 58.2                                                       | 62.5 | 76.7 | 75.0 | 75.2 | 77.0 | 69.0 | 60.0 |
| RACCYB072          | 85.0                  | 54.9                                                       | 67.3 | 69.4 | 73.8 | 73.4 | 71.2 | 69.6 | 65.3 |
| RACCYC036          | 79.0                  | 50.4                                                       | 63.0 | 65.0 | 69.0 | 70.0 | 66.0 | 62.0 | 56.0 |
| RACCYC048          | 83.0                  | 49.3                                                       | 63.0 | 69.0 | 73.0 | 73.0 | 70.0 | 66.0 | 59.0 |
| RACCYC060          | 86.0                  | 62.2                                                       | 65.0 | 74.0 | 76.0 | 76.0 | 72.0 | 68.0 | 61.0 |

Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

## COOLING PERFORMANCE DATA—RACCYB036

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①        |                   |                                                |                                  |                                  |                                  |                                  |                                  |                                  |                                  |                                  |                                  |
|--------------------------------------------------|-------------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| wbE                                              |                   |                                                | 71°F [21.7°C]                    |                                  |                                  | 67°F [19.4°C]                    |                                  |                                  | 63°F [17.2°C]                    |                                  |                                  |
| CFM [L/s]                                        |                   |                                                | 1325 [625]                       | 1175 [555]                       | 950 [448]                        | 1325 [625]                       | 1175 [555]                       | 950 [448]                        | 1325 [625]                       | 1175 [555]                       | 950 [448]                        |
| DR ①                                             |                   |                                                | .05                              | .09                              | .12                              | .05                              | .09                              | .12                              | .05                              | .09                              | .12                              |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F [°C] | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 44.3 [13.0]<br>26.0 [7.6]<br>2.2 | 43.3 [12.7]<br>24.6 [7.2]<br>2.2 | 41.8 [12.3]<br>22.4 [6.6]<br>2.2 | 41.5 [12.2]<br>29.6 [8.7]<br>2.3 | 40.5 [11.9]<br>27.9 [8.2]<br>2.2 | 39.1 [11.5]<br>25.4 [7.4]<br>2.2 | 39.1 [11.5]<br>33.7 [9.9]<br>2.2 | 38.2 [11.2]<br>31.8 [9.3]<br>2.2 | 36.9 [10.8]<br>28.9 [8.5]<br>2.2 |
|                                                  | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 43.0 [12.6]<br>25.5 [7.5]<br>2.4 | 42.0 [12.3]<br>24.0 [7.0]<br>2.3 | 40.6 [11.9]<br>21.9 [6.4]<br>2.3 | 40.2 [11.8]<br>29.0 [8.5]<br>2.4 | 39.3 [11.5]<br>27.4 [8.0]<br>2.4 | 37.9 [11.1]<br>24.9 [7.3]<br>2.3 | 37.8 [11.1]<br>33.1 [9.7]<br>2.4 | 37.0 [10.8]<br>31.3 [9.2]<br>2.3 | 35.7 [10.5]<br>28.5 [8.4]<br>2.3 |
|                                                  | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 41.7 [12.2]<br>24.8 [7.3]<br>2.5 | 40.7 [11.9]<br>23.4 [6.9]<br>2.5 | 39.3 [11.5]<br>21.3 [6.2]<br>2.4 | 38.8 [11.4]<br>28.4 [8.3]<br>2.5 | 37.9 [11.1]<br>26.8 [7.9]<br>2.5 | 36.6 [10.7]<br>24.4 [7.2]<br>2.4 | 36.5 [10.7]<br>32.5 [9.5]<br>2.5 | 35.7 [10.5]<br>30.6 [9.0]<br>2.5 | 34.4 [10.1]<br>27.9 [8.2]<br>2.4 |
|                                                  | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 40.2 [11.8]<br>24.1 [7.1]<br>2.6 | 39.3 [11.5]<br>22.7 [6.7]<br>2.6 | 38.0 [11.1]<br>20.7 [6.1]<br>2.5 | 37.4 [11.0]<br>27.7 [8.1]<br>2.6 | 36.5 [10.7]<br>26.1 [7.6]<br>2.6 | 35.3 [10.3]<br>23.8 [7.0]<br>2.6 | 35.0 [10.3]<br>31.7 [9.3]<br>2.6 | 34.3 [10.1]<br>30.0 [8.8]<br>2.6 | 33.1 [9.7]<br>27.3 [8.0]<br>2.6  |
|                                                  | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 38.7 [11.3]<br>23.3 [6.8]<br>2.7 | 37.9 [11.1]<br>22.0 [6.4]<br>2.7 | 36.5 [10.7]<br>20.0 [5.9]<br>2.7 | 35.9 [10.5]<br>26.9 [7.9]<br>2.8 | 35.1 [10.3]<br>25.3 [7.4]<br>2.7 | 33.8 [9.9]<br>23.1 [6.8]<br>2.7  | 33.5 [9.8]<br>31.0 [9.1]<br>2.8  | 32.8 [9.6]<br>29.2 [8.6]<br>2.7  | 31.6 [9.3]<br>26.6 [7.8]<br>2.7  |
|                                                  | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 37.2 [10.9]<br>22.4 [6.6]<br>2.9 | 36.3 [10.6]<br>21.2 [6.2]<br>2.8 | 35.0 [10.3]<br>19.3 [5.7]<br>2.8 | 34.3 [10.1]<br>26.0 [7.6]<br>2.9 | 33.5 [9.8]<br>24.5 [7.2]<br>2.9  | 32.4 [9.5]<br>22.3 [6.5]<br>2.8  | 32.0 [9.4]<br>30.1 [8.8]<br>2.9  | 31.2 [9.1]<br>28.4 [8.3]<br>2.9  | 30.2 [8.9]<br>25.9 [7.6]<br>2.8  |
|                                                  | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 35.5 [10.4]<br>21.5 [6.3]<br>3.0 | 34.7 [10.2]<br>20.3 [5.9]<br>3.0 | 33.5 [9.8]<br>18.5 [5.4]<br>2.9  | 32.7 [9.6]<br>25.0 [7.3]<br>3.0  | 31.9 [9.3]<br>23.6 [6.9]<br>3.0  | 30.8 [9.0]<br>21.5 [6.3]<br>2.9  | 30.3 [8.9]<br>29.1 [8.5]<br>3.0  | 29.6 [8.7]<br>27.5 [8.1]<br>3.0  | 28.6 [8.4]<br>25.0 [7.3]<br>2.9  |
|                                                  | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 33.8 [9.9]<br>20.5 [6.0]<br>3.1  | 33.0 [9.7]<br>19.3 [5.7]<br>3.1  | 31.9 [9.3]<br>17.6 [5.2]<br>3.1  | 30.9 [9.1]<br>24.0 [7.0]<br>3.2  | 30.2 [8.9]<br>22.7 [6.7]<br>3.1  | 29.2 [8.6]<br>20.6 [6.0]<br>3.1  | 28.6 [8.4]<br>28.1 [8.2]<br>3.2  | 27.9 [8.2]<br>26.5 [7.8]<br>3.1  | 27.0 [7.9]<br>24.2 [7.1]<br>3.1  |
|                                                  | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 32.0 [9.4]<br>19.4 [5.7]<br>3.3  | 31.3 [9.2]<br>18.3 [5.4]<br>3.2  | 30.2 [8.9]<br>16.6 [4.9]<br>3.2  | 29.1 [8.5]<br>22.9 [6.7]<br>3.3  | 28.5 [8.4]<br>21.6 [6.3]<br>3.3  | 27.5 [8.1]<br>19.7 [5.8]<br>3.2  | 26.8 [7.9]<br>26.8 [7.9]<br>3.3  | 26.2 [7.7]<br>25.5 [7.5]<br>3.2  | 25.3 [7.4]<br>23.2 [6.8]<br>3.2  |
|                                                  | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 30.1 [8.8]<br>18.2 [5.3]<br>3.4  | 29.4 [8.6]<br>17.2 [5.0]<br>3.4  | 28.4 [8.3]<br>15.6 [4.6]<br>3.3  | 27.3 [8.0]<br>21.7 [6.4]<br>3.4  | 26.7 [7.8]<br>20.5 [6.0]<br>3.4  | 25.7 [7.5]<br>18.7 [5.5]<br>3.3  | 24.9 [7.3]<br>24.9 [7.3]<br>3.4  | 24.4 [7.2]<br>24.4 [7.2]<br>3.4  | 23.5 [6.9]<br>22.2 [6.5]<br>3.3  |
|                                                  | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 28.2 [8.3]<br>16.9 [5.0]<br>3.5  | 27.5 [8.1]<br>16.0 [4.7]<br>3.5  | 26.6 [7.8]<br>14.6 [4.3]<br>3.4  | 25.3 [7.4]<br>20.5 [6.0]<br>3.6  | 24.8 [7.3]<br>19.3 [5.7]<br>3.5  | 23.9 [7.0]<br>17.6 [5.2]<br>3.5  | 23.0 [6.7]<br>23.0 [6.7]<br>3.5  | 22.5 [6.6]<br>22.5 [6.6]<br>3.5  | 21.7 [6.4]<br>21.1 [6.2]<br>3.4  |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power—kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[ ] Designates Metric Conversions



## COOLING PERFORMANCE DATA—RACCYB048

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①        |                   |                                                |                                  |                                  |                                  |                                   |                                   |                                  |                                   |                                   |                                   |
|--------------------------------------------------|-------------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| wbE                                              |                   |                                                | 71°F [21.7°C]                    |                                  |                                  | 67°F [19.4°C]                     |                                   |                                  | 63°F [17.2°C]                     |                                   |                                   |
| CFM [L/s]                                        |                   |                                                | 1775 [838]                       | 1575 [743]                       | 1275 [602]                       | 1775 [838]                        | 1575 [743]                        | 1275 [602]                       | 1775 [838]                        | 1575 [743]                        | 1275 [602]                        |
| DR ①                                             |                   |                                                | .05                              | .09                              | .12                              | .05                               | .09                               | .12                              | .05                               | .09                               | .12                               |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F [°C] | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 57.1 [16.7]<br>33.2 [9.7]<br>3.4 | 55.8 [16.4]<br>31.4 [9.2]<br>3.4 | 53.9 [15.8]<br>28.6 [8.4]<br>3.3 | 54.2 [15.9]<br>38.6 [11.3]<br>3.4 | 53.0 [15.5]<br>36.5 [10.7]<br>3.4 | 51.2 [15.0]<br>33.2 [9.7]<br>3.3 | 51.4 [15.1]<br>44.0 [12.9]<br>3.4 | 50.2 [14.7]<br>41.5 [12.2]<br>3.3 | 48.5 [14.2]<br>37.8 [11.1]<br>3.3 |
|                                                  | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 55.7 [16.3]<br>32.4 [9.5]<br>3.5 | 54.4 [15.9]<br>30.6 [9.0]<br>3.5 | 52.5 [15.4]<br>27.9 [8.2]<br>3.4 | 52.8 [15.5]<br>37.8 [11.1]<br>3.6 | 51.6 [15.1]<br>35.7 [10.5]<br>3.5 | 49.9 [14.6]<br>32.5 [9.5]<br>3.5 | 50.0 [14.7]<br>43.2 [12.7]<br>3.5 | 48.9 [14.3]<br>40.7 [11.9]<br>3.5 | 47.2 [13.8]<br>37.1 [10.9]<br>3.4 |
|                                                  | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 54.3 [15.9]<br>31.6 [9.3]<br>3.7 | 53.1 [15.6]<br>29.8 [8.7]<br>3.6 | 51.2 [15.0]<br>27.2 [8.0]<br>3.6 | 51.4 [15.1]<br>36.9 [10.8]<br>3.7 | 50.3 [14.7]<br>34.9 [10.2]<br>3.7 | 48.5 [14.2]<br>31.8 [9.3]<br>3.6 | 48.6 [14.2]<br>42.3 [12.4]<br>3.7 | 47.5 [13.9]<br>40.0 [11.7]<br>3.6 | 45.8 [13.4]<br>36.4 [10.7]<br>3.6 |
|                                                  | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 52.9 [15.5]<br>30.7 [9.0]<br>3.8 | 51.7 [15.2]<br>29.0 [8.5]<br>3.8 | 49.9 [14.6]<br>26.4 [7.7]<br>3.7 | 50.0 [14.7]<br>36.1 [10.6]<br>3.8 | 48.9 [14.3]<br>34.1 [10.0]<br>3.8 | 47.2 [13.8]<br>31.1 [9.1]<br>3.7 | 47.2 [13.8]<br>41.5 [12.2]<br>3.8 | 46.1 [13.5]<br>39.2 [11.5]<br>3.7 | 44.5 [13.0]<br>35.7 [10.5]<br>3.7 |
|                                                  | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 51.5 [15.1]<br>29.9 [8.8]<br>3.9 | 50.3 [14.7]<br>28.2 [8.3]<br>3.9 | 48.6 [14.2]<br>25.7 [7.5]<br>3.8 | 48.6 [14.2]<br>35.3 [10.3]<br>4.0 | 47.5 [13.9]<br>33.3 [9.8]<br>3.9  | 45.9 [13.5]<br>30.3 [8.9]<br>3.9 | 45.8 [13.4]<br>40.7 [11.9]<br>3.9 | 44.8 [13.1]<br>38.4 [11.3]<br>3.9 | 43.2 [12.7]<br>35.0 [10.3]<br>3.8 |
|                                                  | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 50.1 [14.7]<br>29.1 [8.5]<br>4.1 | 49.0 [14.4]<br>27.4 [8.0]<br>4.0 | 47.3 [13.9]<br>25.0 [7.3]<br>4.0 | 47.2 [13.8]<br>34.5 [10.1]<br>4.1 | 46.2 [13.5]<br>32.5 [9.5]<br>4.1  | 44.6 [13.1]<br>29.6 [8.7]<br>4.0 | 44.4 [13.0]<br>39.8 [11.7]<br>4.1 | 43.4 [12.7]<br>37.6 [11.0]<br>4.0 | 41.9 [12.3]<br>34.3 [10.1]<br>4.0 |
|                                                  | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 48.7 [14.3]<br>28.2 [8.3]<br>4.2 | 47.6 [14.0]<br>26.7 [7.8]<br>4.2 | 45.9 [13.5]<br>24.3 [7.1]<br>4.1 | 45.8 [13.4]<br>33.6 [9.8]<br>4.2  | 44.8 [13.1]<br>31.7 [9.3]<br>4.2  | 43.3 [12.7]<br>28.9 [8.5]<br>4.1 | 43.0 [12.6]<br>39.0 [11.4]<br>4.2 | 42.0 [12.3]<br>36.8 [10.8]<br>4.2 | 40.6 [11.9]<br>33.5 [9.8]<br>4.1  |
|                                                  | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 47.3 [13.9]<br>27.4 [8.0]<br>4.4 | 46.2 [13.5]<br>25.9 [7.6]<br>4.3 | 44.6 [13.1]<br>23.6 [6.9]<br>4.2 | 44.4 [13.0]<br>32.8 [9.6]<br>4.4  | 43.4 [12.7]<br>31.0 [9.1]<br>4.3  | 41.9 [12.3]<br>28.2 [8.3]<br>4.3 | 41.6 [12.2]<br>38.2 [11.2]<br>4.3 | 40.6 [11.9]<br>36.0 [10.6]<br>4.3 | 39.2 [11.5]<br>32.8 [9.6]<br>4.2  |
|                                                  | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 45.9 [13.5]<br>26.6 [7.8]<br>4.5 | 44.9 [13.2]<br>25.1 [7.4]<br>4.4 | 43.3 [12.7]<br>22.9 [6.7]<br>4.4 | 43.0 [12.6]<br>32.0 [9.4]<br>4.5  | 42.1 [12.3]<br>30.2 [8.9]<br>4.5  | 40.6 [11.9]<br>27.5 [8.1]<br>4.4 | 40.2 [11.8]<br>37.3 [10.9]<br>4.5 | 39.3 [11.5]<br>35.2 [10.3]<br>4.4 | 37.9 [11.1]<br>32.1 [9.4]<br>4.4  |
|                                                  | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 44.5 [13.0]<br>25.7 [7.5]<br>4.6 | 43.5 [12.7]<br>24.3 [7.1]<br>4.6 | 42.0 [12.3]<br>22.1 [6.5]<br>4.5 | 41.6 [12.2]<br>31.1 [9.1]<br>4.7  | 40.7 [11.9]<br>29.4 [8.6]<br>4.6  | 39.3 [11.5]<br>26.8 [7.9]<br>4.5 | 38.8 [11.4]<br>36.5 [10.7]<br>4.6 | 37.9 [11.1]<br>34.5 [10.1]<br>4.6 | 36.6 [10.7]<br>31.4 [9.2]<br>4.5  |
|                                                  | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 43.1 [12.6]<br>24.9 [7.3]<br>4.8 | 42.1 [12.3]<br>23.5 [6.9]<br>4.7 | 40.7 [11.9]<br>21.4 [6.3]<br>4.6 | 40.2 [11.8]<br>30.3 [8.9]<br>4.8  | 39.3 [11.5]<br>28.6 [8.4]<br>4.7  | 38.0 [11.1]<br>26.1 [7.6]<br>4.7 | 37.4 [11.0]<br>35.7 [10.5]<br>4.8 | 36.5 [10.7]<br>33.7 [9.9]<br>4.7  | 35.3 [10.3]<br>30.7 [9.0]<br>4.6  |

DR —Depression ratio  
dbE —Entering air dry bulbwbE—Entering air wet bulb  
Power —kW input**NOTES:** ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions

## COOLING PERFORMANCE DATA—RACCYB060

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①        |                   |                                                |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |
|--------------------------------------------------|-------------------|------------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| wbE                                              |                   |                                                | 71°F [21.7°C]                     |                                   |                                   | 67°F [19.4°C]                     |                                   |                                   | 63°F [17.2°C]                     |                                   |                                   |
| CFM [L/s]                                        |                   |                                                | 2200 [1038]                       | 1825 [861]                        | 1600 [755]                        | 2200 [1038]                       | 1825 [861]                        | 1600 [755]                        | 2200 [1038]                       | 1825 [861]                        | 1600 [755]                        |
| DR ①                                             |                   |                                                | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F [°C] | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 72.1 [21.1]<br>43.2 [12.7]<br>4.2 | 69.5 [20.4]<br>39.4 [11.5]<br>4.1 | 67.9 [19.9]<br>37.2 [10.9]<br>4.1 | 68.4 [20.0]<br>48.5 [14.2]<br>4.2 | 66.0 [19.3]<br>44.2 [13.0]<br>4.2 | 64.5 [18.9]<br>41.7 [12.2]<br>4.1 | 64.9 [19.0]<br>53.9 [15.8]<br>4.2 | 62.6 [18.3]<br>49.2 [14.4]<br>4.1 | 61.1 [17.9]<br>46.3 [13.6]<br>4.1 |
|                                                  | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 70.4 [20.6]<br>42.4 [12.4]<br>4.4 | 67.9 [19.9]<br>38.7 [11.3]<br>4.4 | 66.4 [19.5]<br>36.5 [10.7]<br>4.3 | 66.8 [19.6]<br>47.7 [14.0]<br>4.5 | 64.4 [18.9]<br>43.5 [12.7]<br>4.4 | 62.9 [18.4]<br>41.0 [12.0]<br>4.4 | 63.2 [18.5]<br>53.1 [15.6]<br>4.5 | 60.9 [17.8]<br>48.4 [14.2]<br>4.4 | 59.6 [17.5]<br>45.6 [13.4]<br>4.3 |
|                                                  | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 68.6 [20.1]<br>41.5 [12.2]<br>4.7 | 66.1 [19.4]<br>37.9 [11.1]<br>4.6 | 64.7 [19.0]<br>35.7 [10.5]<br>4.6 | 64.9 [19.0]<br>46.7 [13.7]<br>4.7 | 62.6 [18.3]<br>42.7 [12.5]<br>4.6 | 61.2 [17.9]<br>40.2 [11.8]<br>4.6 | 61.4 [18.0]<br>52.1 [15.3]<br>4.7 | 59.2 [17.4]<br>47.6 [14.0]<br>4.6 | 57.9 [17.0]<br>44.8 [13.1]<br>4.6 |
|                                                  | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 66.7 [19.5]<br>40.4 [11.8]<br>4.9 | 64.3 [18.8]<br>36.9 [10.8]<br>4.8 | 62.8 [18.4]<br>34.7 [10.2]<br>4.8 | 63.0 [18.5]<br>45.6 [13.4]<br>5.0 | 60.7 [17.8]<br>41.7 [12.2]<br>4.9 | 59.4 [17.4]<br>39.3 [11.5]<br>4.8 | 59.5 [17.4]<br>51.0 [14.9]<br>4.9 | 57.3 [16.8]<br>46.6 [13.7]<br>4.8 | 56.0 [16.4]<br>43.9 [12.9]<br>4.8 |
|                                                  | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 64.6 [18.9]<br>39.2 [11.5]<br>5.2 | 62.2 [18.2]<br>35.7 [10.5]<br>5.1 | 60.8 [17.8]<br>33.7 [9.9]<br>5.0  | 60.9 [17.8]<br>44.4 [13.0]<br>5.2 | 58.7 [17.2]<br>40.5 [11.9]<br>5.1 | 57.4 [16.8]<br>38.2 [11.2]<br>5.0 | 57.4 [16.8]<br>49.8 [14.6]<br>5.2 | 55.3 [16.2]<br>45.4 [13.3]<br>5.1 | 54.1 [15.9]<br>42.8 [12.5]<br>5.0 |
|                                                  | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 62.3 [18.3]<br>37.8 [11.1]<br>5.4 | 60.1 [17.6]<br>34.5 [10.1]<br>5.3 | 58.7 [17.2]<br>32.5 [9.5]<br>5.2  | 58.7 [17.2]<br>43.0 [12.6]<br>5.4 | 56.6 [16.6]<br>39.3 [11.5]<br>5.3 | 55.3 [16.2]<br>37.0 [10.8]<br>5.3 | 55.1 [16.1]<br>48.4 [14.2]<br>5.4 | 53.1 [15.6]<br>44.2 [13.0]<br>5.3 | 52.0 [15.2]<br>41.6 [12.2]<br>5.2 |
|                                                  | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 60.0 [17.6]<br>36.2 [10.6]<br>5.6 | 57.8 [16.9]<br>33.1 [9.7]<br>5.5  | 56.5 [16.6]<br>31.2 [9.1]<br>5.5  | 56.3 [16.5]<br>41.5 [12.2]<br>5.7 | 54.3 [15.9]<br>37.9 [11.1]<br>5.6 | 53.1 [15.6]<br>35.7 [10.5]<br>5.5 | 52.8 [15.5]<br>46.9 [13.7]<br>5.6 | 50.9 [14.9]<br>42.8 [12.5]<br>5.5 | 49.7 [14.6]<br>40.3 [11.8]<br>5.5 |
|                                                  | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 57.5 [16.9]<br>34.6 [10.1]<br>5.9 | 55.4 [16.2]<br>31.5 [9.2]<br>5.8  | 54.2 [15.9]<br>29.7 [8.7]<br>5.7  | 53.8 [15.8]<br>39.8 [11.7]<br>5.9 | 51.9 [15.2]<br>36.3 [10.6]<br>5.8 | 50.7 [14.9]<br>34.2 [10.0]<br>5.7 | 50.3 [14.7]<br>45.2 [13.2]<br>5.9 | 48.4 [14.2]<br>41.2 [12.1]<br>5.8 | 47.4 [13.9]<br>38.9 [11.4]<br>5.7 |
|                                                  | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 54.8 [16.1]<br>32.7 [9.6]<br>6.1  | 52.8 [15.5]<br>29.9 [8.8]<br>6.0  | 51.7 [15.2]<br>28.2 [8.3]<br>5.9  | 51.2 [15.0]<br>38.0 [11.1]<br>6.1 | 49.3 [14.4]<br>34.7 [10.2]<br>6.0 | 48.2 [14.1]<br>32.7 [9.6]<br>6.0  | 47.6 [14.0]<br>43.4 [12.7]<br>6.1 | 45.9 [13.5]<br>39.6 [11.6]<br>6.0 | 44.9 [13.2]<br>37.3 [10.9]<br>5.9 |
|                                                  | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 52.0 [15.2]<br>30.8 [9.0]<br>6.3  | 50.2 [14.7]<br>28.1 [8.2]<br>6.2  | 49.0 [14.4]<br>26.5 [7.8]<br>6.2  | 48.4 [14.2]<br>36.0 [10.6]<br>6.4 | 46.6 [13.7]<br>32.9 [9.6]<br>6.3  | 45.6 [13.4]<br>31.0 [9.1]<br>6.2  | 44.8 [13.1]<br>41.4 [12.1]<br>6.3 | 43.2 [12.7]<br>37.8 [11.1]<br>6.2 | 42.2 [12.4]<br>35.6 [10.4]<br>6.2 |
|                                                  | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 49.1 [14.4]<br>28.6 [8.4]<br>6.6  | 47.3 [13.9]<br>26.1 [7.6]<br>6.5  | 46.3 [13.6]<br>24.6 [7.2]<br>6.4  | 45.4 [13.3]<br>33.9 [9.9]<br>6.6  | 43.8 [12.8]<br>30.9 [9.1]<br>6.5  | 42.8 [12.5]<br>29.2 [8.6]<br>6.4  | 41.9 [12.3]<br>39.3 [11.5]<br>6.6 | 40.4 [11.8]<br>35.8 [10.5]<br>6.5 | 39.5 [11.6]<br>33.8 [9.9]<br>6.4  |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power—kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[ ] Designates Metric Conversions

## COOLING PERFORMANCE DATA—RACCYB072

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①           |                   |                                                |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |
|-----------------------------------------------------|-------------------|------------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| wbE                                                 |                   |                                                | 71°F [21.7°C]                     |                                   |                                   | 67°F [19.4°C]                     |                                   |                                   | 63°F [17.2°C]                     |                                   |                                   |
| CFM [L/s]                                           |                   |                                                | 2525 [1192]                       | 2400 [1133]                       | 1825 [861]                        | 2525 [1192]                       | 2400 [1133]                       | 1825 [861]                        | 2525 [1192]                       | 2400 [1133]                       | 1825 [861]                        |
| DR ①                                                |                   |                                                | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F<br>[°C] | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 79.7 [23.4]<br>44.6 [13.1]<br>4.8 | 78.9 [23.1]<br>43.5 [12.7]<br>4.8 | 75.5 [22.1]<br>38.6 [11.3]<br>4.7 | 73.8 [21.6]<br>49.7 [14.6]<br>4.7 | 73.1 [21.4]<br>48.5 [14.2]<br>4.7 | 70.0 [20.5]<br>43.1 [12.6]<br>4.6 | 68.0 [19.9]<br>54.9 [16.1]<br>4.9 | 67.4 [19.8]<br>53.6 [15.7]<br>4.8 | 64.4 [18.9]<br>47.6 [14.0]<br>4.7 |
|                                                     | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 78.2 [22.9]<br>44.4 [13.0]<br>5.2 | 77.4 [22.7]<br>43.4 [12.7]<br>5.1 | 74.1 [21.7]<br>38.5 [11.3]<br>5.0 | 72.3 [21.2]<br>49.6 [14.5]<br>5.1 | 71.6 [21.0]<br>48.4 [14.2]<br>5.0 | 68.5 [20.1]<br>43.0 [12.6]<br>4.9 | 66.5 [19.5]<br>54.7 [16.0]<br>5.2 | 65.9 [19.3]<br>53.4 [15.7]<br>5.2 | 63.0 [18.5]<br>47.5 [13.9]<br>5.1 |
|                                                     | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 76.6 [22.5]<br>44.3 [13.0]<br>5.5 | 75.9 [22.2]<br>43.2 [12.7]<br>5.5 | 72.6 [21.3]<br>38.4 [11.3]<br>5.4 | 70.8 [20.8]<br>49.4 [14.5]<br>5.4 | 70.1 [20.5]<br>48.3 [14.2]<br>5.4 | 67.1 [19.7]<br>42.9 [12.6]<br>5.2 | 65.0 [19.1]<br>54.6 [16.0]<br>5.5 | 64.4 [18.9]<br>53.3 [15.6]<br>5.5 | 61.6 [18.1]<br>47.4 [13.9]<br>5.4 |
|                                                     | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 75.1 [22.0]<br>44.2 [13.0]<br>5.8 | 74.4 [21.8]<br>43.1 [12.6]<br>5.8 | 71.2 [20.9]<br>38.3 [11.2]<br>5.7 | 69.3 [20.3]<br>49.3 [14.4]<br>5.7 | 68.6 [20.1]<br>48.1 [14.1]<br>5.7 | 65.7 [19.3]<br>42.8 [12.5]<br>5.6 | 63.5 [18.6]<br>54.5 [16.0]<br>5.8 | 62.9 [18.4]<br>53.2 [15.6]<br>5.8 | 60.1 [17.6]<br>47.2 [13.8]<br>5.7 |
|                                                     | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 73.6 [21.6]<br>44.0 [12.9]<br>6.1 | 72.9 [21.4]<br>43.0 [12.6]<br>6.1 | 69.8 [20.5]<br>38.2 [11.2]<br>6.0 | 67.8 [19.9]<br>49.2 [14.4]<br>6.0 | 67.1 [19.7]<br>48.0 [14.1]<br>6.0 | 64.2 [18.8]<br>42.6 [12.5]<br>5.9 | 61.9 [18.1]<br>54.3 [15.9]<br>6.2 | 61.4 [18.0]<br>53.0 [15.5]<br>6.1 | 58.7 [17.2]<br>47.1 [13.8]<br>6.0 |
|                                                     | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 72.1 [21.1]<br>43.9 [12.9]<br>6.5 | 71.4 [20.9]<br>42.8 [12.5]<br>6.4 | 68.3 [20.0]<br>38.0 [11.1]<br>6.3 | 66.3 [19.4]<br>49.0 [14.4]<br>6.4 | 65.6 [19.2]<br>47.9 [14.0]<br>6.3 | 62.8 [18.4]<br>42.5 [12.5]<br>6.2 | 60.4 [17.7]<br>54.2 [15.9]<br>6.5 | 59.9 [17.6]<br>52.9 [15.5]<br>6.4 | 57.3 [16.8]<br>47.0 [13.8]<br>6.3 |
|                                                     | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 70.6 [20.7]<br>43.7 [12.8]<br>6.8 | 69.9 [20.5]<br>42.7 [12.5]<br>6.7 | 66.9 [19.6]<br>37.9 [11.1]<br>6.6 | 64.8 [19.0]<br>48.9 [14.3]<br>6.7 | 64.1 [18.8]<br>47.7 [14.0]<br>6.6 | 61.4 [18.0]<br>42.4 [12.4]<br>6.5 | 58.9 [17.3]<br>54.0 [15.8]<br>6.8 | 58.4 [17.1]<br>52.8 [15.5]<br>6.8 | 55.8 [16.4]<br>46.9 [13.7]<br>6.6 |
|                                                     | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 69.1 [20.3]<br>43.6 [12.8]<br>7.1 | 68.4 [20.0]<br>42.6 [12.5]<br>7.1 | 65.4 [19.2]<br>37.8 [11.1]<br>6.9 | 63.2 [18.5]<br>48.7 [14.3]<br>7.0 | 62.6 [18.3]<br>47.6 [14.0]<br>7.0 | 59.9 [17.6]<br>42.3 [12.4]<br>6.8 | 57.4 [16.8]<br>53.9 [15.8]<br>7.1 | 56.9 [16.7]<br>52.6 [15.4]<br>7.1 | 54.4 [15.9]<br>46.7 [13.7]<br>6.9 |
|                                                     | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 67.6 [19.8]<br>43.4 [12.7]<br>7.4 | 66.9 [19.6]<br>42.4 [12.4]<br>7.4 | 64.0 [18.8]<br>37.7 [11.0]<br>7.2 | 61.7 [18.1]<br>48.6 [14.2]<br>7.3 | 61.1 [17.9]<br>47.5 [13.9]<br>7.3 | 58.5 [17.1]<br>42.1 [12.3]<br>7.1 | 55.9 [16.4]<br>53.8 [15.8]<br>7.4 | 55.4 [16.2]<br>52.5 [15.4]<br>7.4 | 53.0 [15.5]<br>46.6 [13.7]<br>7.2 |
|                                                     | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 66.0 [19.3]<br>43.3 [12.7]<br>7.7 | 65.4 [19.2]<br>42.3 [12.4]<br>7.7 | 62.6 [18.3]<br>37.6 [11.0]<br>7.5 | 60.2 [17.6]<br>48.5 [14.2]<br>7.6 | 59.6 [17.5]<br>47.3 [13.9]<br>7.6 | 57.0 [16.7]<br>42.0 [12.3]<br>7.4 | 54.4 [15.9]<br>53.6 [15.7]<br>7.8 | 53.9 [15.8]<br>52.4 [15.4]<br>7.7 | 51.5 [15.1]<br>46.5 [13.6]<br>7.6 |
|                                                     | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 64.5 [18.9]<br>43.2 [12.7]<br>8.1 | 63.9 [18.7]<br>42.1 [12.3]<br>8.0 | 61.1 [17.9]<br>37.4 [11.0]<br>7.9 | 58.7 [17.2]<br>48.3 [14.2]<br>8.0 | 58.1 [17.0]<br>47.2 [13.8]<br>7.9 | 55.6 [16.3]<br>41.9 [12.3]<br>7.8 | 52.9 [15.5]<br>52.9 [15.5]<br>8.1 | 52.4 [15.4]<br>52.2 [15.3]<br>8.0 | 50.1 [14.7]<br>46.4 [13.6]<br>7.9 |

DR —Depression ratio  
dbE —Entering air dry bulbwbE —Entering air wet bulb  
Power —kW input**NOTES:** ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions

## COOLING PERFORMANCE DATA—RACCYC036

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ① |                   |                                                |                                  |                                  |                                  |                                  |                                  |                                  |                                   |                                  |                                  |
|-------------------------------------------|-------------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------|----------------------------------|
| wbE                                       |                   |                                                | 71°F [21.7°C]                    |                                  |                                  | 67°F [19.4°C]                    |                                  |                                  | 63°F [17.2°C]                     |                                  |                                  |
| CFM [L/s]                                 |                   |                                                | 1425 [673]                       | 1050 [496]                       | 1100 [519]                       | 1425 [673]                       | 1050 [496]                       | 1100 [519]                       | 1425 [673]                        | 1050 [496]                       | 1100 [519]                       |
| DR ①                                      |                   |                                                | .05                              | .09                              | .12                              | .05                              | .09                              | .12                              | .05                               | .09                              | .12                              |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 46.7 [13.7]<br>28.1 [8.2]<br>2.3 | 43.8 [12.8]<br>24.1 [7.1]<br>2.3 | 44.2 [13.0]<br>24.6 [7.2]<br>2.3 | 43.6 [12.8]<br>32.1 [9.4]<br>2.3 | 41.0 [12.0]<br>27.5 [8.1]<br>2.3 | 41.3 [12.1]<br>28.1 [8.2]<br>2.3 | 40.4 [11.8]<br>35.9 [10.5]<br>2.3 | 37.9 [11.1]<br>30.8 [9.0]<br>2.2 | 38.3 [11.2]<br>31.5 [9.2]<br>2.2 |
|                                           | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 46.1 [13.5]<br>28.0 [8.2]<br>2.5 | 43.3 [12.7]<br>24.0 [7.0]<br>2.4 | 43.7 [12.8]<br>24.6 [7.2]<br>2.4 | 43.1 [12.6]<br>32.0 [9.4]<br>2.5 | 40.5 [11.9]<br>27.4 [8.0]<br>2.4 | 40.8 [12.0]<br>28.1 [8.2]<br>2.4 | 39.9 [11.7]<br>35.8 [10.5]<br>2.4 | 37.4 [11.0]<br>30.7 [9.0]<br>2.3 | 37.8 [11.1]<br>31.4 [9.2]<br>2.3 |
|                                           | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 45.4 [13.3]<br>27.2 [8.1]<br>2.6 | 42.6 [12.5]<br>23.8 [7.0]<br>2.5 | 43.0 [12.6]<br>24.3 [7.1]<br>2.5 | 42.4 [12.4]<br>31.7 [9.3]<br>2.6 | 39.8 [11.7]<br>27.2 [8.0]<br>2.5 | 40.1 [11.8]<br>27.8 [8.1]<br>2.5 | 39.1 [11.5]<br>35.5 [10.4]<br>2.5 | 36.8 [10.8]<br>30.4 [8.9]<br>2.5 | 37.1 [10.9]<br>31.1 [9.1]<br>2.5 |
|                                           | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 44.5 [13.0]<br>27.2 [8.0]<br>2.7 | 41.8 [12.3]<br>23.3 [6.8]<br>2.7 | 42.1 [12.3]<br>23.9 [7.0]<br>2.7 | 41.4 [12.1]<br>31.2 [9.1]<br>2.7 | 38.9 [11.4]<br>26.8 [7.9]<br>2.7 | 39.2 [11.5]<br>27.4 [8.0]<br>2.7 | 38.2 [11.2]<br>35.0 [10.3]<br>2.7 | 35.9 [10.5]<br>30.0 [8.8]<br>2.6 | 36.2 [10.6]<br>30.7 [9.0]<br>2.6 |
|                                           | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 43.4 [12.7]<br>26.5 [7.8]<br>2.9 | 40.7 [11.9]<br>22.7 [6.7]<br>2.8 | 41.1 [12.0]<br>23.2 [6.8]<br>2.8 | 40.3 [11.8]<br>30.5 [8.9]<br>2.9 | 37.9 [11.1]<br>26.1 [7.6]<br>2.8 | 38.2 [11.2]<br>26.7 [7.8]<br>2.8 | 37.1 [10.9]<br>34.3 [10.1]<br>2.8 | 34.8 [10.2]<br>29.4 [8.6]<br>2.7 | 35.1 [10.3]<br>30.1 [8.8]<br>2.7 |
|                                           | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 42.1 [12.3]<br>25.6 [7.5]<br>3.0 | 39.5 [11.6]<br>21.9 [6.4]<br>2.9 | 39.8 [11.7]<br>22.4 [6.6]<br>2.9 | 39.0 [11.4]<br>29.6 [8.7]<br>3.0 | 36.6 [10.7]<br>25.3 [7.4]<br>2.9 | 36.9 [10.8]<br>25.9 [7.6]<br>2.9 | 35.8 [10.5]<br>33.4 [9.8]<br>2.9  | 33.6 [9.8]<br>28.6 [8.4]<br>2.9  | 33.9 [9.9]<br>29.2 [8.6]<br>2.9  |
|                                           | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 40.5 [11.9]<br>24.5 [7.2]<br>3.1 | 38.1 [11.2]<br>21.0 [6.2]<br>3.0 | 38.4 [11.3]<br>21.4 [6.3]<br>3.1 | 37.5 [11.0]<br>28.4 [8.3]<br>3.1 | 35.2 [10.3]<br>24.4 [7.2]<br>3.0 | 35.5 [10.4]<br>24.9 [7.3]<br>3.1 | 34.3 [10.1]<br>32.2 [9.4]<br>3.1  | 32.2 [9.4]<br>27.6 [8.1]<br>3.0  | 32.5 [9.5]<br>28.2 [8.3]<br>3.0  |
|                                           | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 38.9 [11.4]<br>23.1 [6.8]<br>3.3 | 36.5 [10.7]<br>19.8 [5.8]<br>3.2 | 36.8 [10.8]<br>20.2 [5.9]<br>3.2 | 35.8 [10.5]<br>27.1 [7.9]<br>3.3 | 33.6 [9.8]<br>23.2 [6.8]<br>3.2  | 33.9 [9.9]<br>23.7 [6.9]<br>3.2  | 32.6 [9.6]<br>30.9 [9.1]<br>3.2   | 30.6 [9.0]<br>26.5 [7.8]<br>3.1  | 30.9 [9.1]<br>27.1 [7.9]<br>3.1  |
|                                           | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 37.0 [10.8]<br>21.5 [6.3]<br>3.4 | 34.7 [10.2]<br>18.5 [5.4]<br>3.3 | 35.0 [10.3]<br>18.9 [5.5]<br>3.3 | 33.9 [9.9]<br>25.5 [7.5]<br>3.4  | 31.9 [9.3]<br>21.9 [6.4]<br>3.3  | 32.1 [9.4]<br>22.4 [6.6]<br>3.3  | 30.7 [9.0]<br>29.3 [8.6]<br>3.3   | 28.8 [8.4]<br>25.1 [7.4]<br>3.2  | 29.1 [8.5]<br>25.7 [7.5]<br>3.3  |
|                                           | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 34.9 [10.2]<br>19.8 [5.8]<br>3.5 | 32.8 [9.6]<br>17.0 [5.0]<br>3.4  | 33.0 [9.7]<br>17.3 [5.1]<br>3.4  | 31.8 [9.3]<br>23.8 [7.0]<br>3.5  | 29.9 [8.8]<br>20.4 [6.0]<br>3.4  | 30.2 [8.9]<br>20.8 [6.1]<br>3.4  | 28.6 [8.4]<br>27.6 [8.1]<br>3.5   | 26.9 [7.9]<br>23.6 [6.9]<br>3.4  | 27.1 [7.9]<br>24.2 [7.1]<br>3.4  |
|                                           | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 32.6 [9.6]<br>17.8 [5.2]<br>3.7  | 30.6 [9.0]<br>15.3 [4.5]<br>3.6  | 30.9 [9.1]<br>15.6 [4.6]<br>3.6  | 29.6 [8.7]<br>21.8 [6.4]<br>3.7  | 27.8 [8.1]<br>18.7 [5.5]<br>3.6  | 28.0 [8.2]<br>19.1 [5.6]<br>3.6  | 26.4 [7.7]<br>25.6 [7.5]<br>3.6   | 24.7 [7.2]<br>21.9 [6.4]<br>3.5  | 25.0 [7.3]<br>22.4 [6.6]<br>3.5  |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power—kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[ ] Designates Metric Conversions

## COOLING PERFORMANCE DATA—RACCYC048

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①        |                   |                                                |                                   |                                  |                                  |                                   |                                   |                                   |                                   |                                   |                                   |
|--------------------------------------------------|-------------------|------------------------------------------------|-----------------------------------|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| wbE                                              |                   |                                                | 71°F [21.7°C]                     |                                  |                                  | 67°F [19.4°C]                     |                                   |                                   | 63°F [17.2°C]                     |                                   |                                   |
| CFM [L/s]                                        |                   |                                                | 1875 [885]                        | 1450 [684]                       | 1450 [684]                       | 1875 [885]                        | 1450 [684]                        | 1450 [684]                        | 1875 [885]                        | 1450 [684]                        | 1450 [684]                        |
| DR ①                                             |                   |                                                | .05                               | .09                              | .12                              | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F [°C] | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 63.3 [18.6]<br>36.8 [10.8]<br>3.2 | 60.1 [17.6]<br>32.4 [9.5]<br>3.1 | 60.1 [17.6]<br>32.4 [9.5]<br>3.1 | 58.9 [17.3]<br>42.7 [12.5]<br>3.2 | 56.0 [16.4]<br>37.5 [11.0]<br>3.1 | 56.0 [16.4]<br>37.5 [11.0]<br>3.1 | 55.3 [16.2]<br>49.4 [14.5]<br>3.2 | 52.5 [15.4]<br>43.5 [12.7]<br>3.1 | 52.5 [15.4]<br>43.5 [12.7]<br>3.1 |
|                                                  | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 61.8 [18.1]<br>35.9 [10.5]<br>3.4 | 58.6 [17.2]<br>31.6 [9.3]<br>3.3 | 58.6 [17.2]<br>31.6 [9.3]<br>3.3 | 57.4 [16.8]<br>41.8 [12.3]<br>3.4 | 54.5 [16.0]<br>36.8 [10.8]<br>3.3 | 54.5 [16.0]<br>36.8 [10.8]<br>3.3 | 53.8 [15.8]<br>48.5 [14.2]<br>3.3 | 51.1 [15.0]<br>42.7 [12.5]<br>3.2 | 51.1 [15.0]<br>42.7 [12.5]<br>3.2 |
|                                                  | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 60.2 [17.6]<br>35.0 [10.3]<br>3.5 | 57.2 [16.8]<br>30.8 [9.0]<br>3.5 | 57.2 [16.8]<br>30.8 [9.0]<br>3.5 | 55.8 [16.4]<br>40.9 [12.0]<br>3.5 | 53.0 [15.5]<br>36.0 [10.6]<br>3.4 | 53.0 [15.5]<br>36.0 [10.6]<br>3.4 | 52.2 [15.3]<br>47.7 [14.0]<br>3.5 | 49.6 [14.5]<br>41.9 [12.3]<br>3.4 | 49.6 [14.5]<br>41.9 [12.3]<br>3.4 |
|                                                  | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 58.6 [17.2]<br>34.1 [10.0]<br>3.7 | 55.7 [16.3]<br>30.0 [8.8]<br>3.6 | 55.7 [16.3]<br>30.0 [8.8]<br>3.6 | 54.2 [15.9]<br>40.0 [11.7]<br>3.7 | 51.5 [15.1]<br>35.2 [10.3]<br>3.6 | 51.5 [15.1]<br>35.2 [10.3]<br>3.6 | 50.6 [14.8]<br>46.8 [13.7]<br>3.7 | 48.1 [14.1]<br>41.1 [12.0]<br>3.6 | 48.1 [14.1]<br>41.1 [12.0]<br>3.6 |
|                                                  | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 57.0 [16.7]<br>33.2 [9.7]<br>3.9  | 54.1 [15.9]<br>29.2 [8.6]<br>3.8 | 54.1 [15.9]<br>29.2 [8.6]<br>3.8 | 52.6 [15.4]<br>39.1 [11.5]<br>3.9 | 50.0 [14.7]<br>34.4 [10.1]<br>3.8 | 50.0 [14.7]<br>34.4 [10.1]<br>3.8 | 49.0 [14.4]<br>45.8 [13.4]<br>3.9 | 46.5 [13.6]<br>40.3 [11.8]<br>3.8 | 46.5 [13.6]<br>40.3 [11.8]<br>3.8 |
|                                                  | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 55.4 [16.2]<br>32.3 [9.5]<br>4.1  | 52.6 [15.4]<br>28.4 [8.3]<br>4.0 | 52.6 [15.4]<br>28.4 [8.3]<br>4.0 | 51.0 [14.9]<br>38.2 [11.2]<br>4.1 | 48.4 [14.2]<br>33.6 [9.8]<br>4.0  | 48.4 [14.2]<br>33.6 [9.8]<br>4.0  | 47.4 [13.9]<br>44.9 [13.2]<br>4.1 | 45.0 [13.2]<br>39.5 [11.6]<br>4.0 | 45.0 [13.2]<br>39.5 [11.6]<br>4.0 |
|                                                  | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 53.8 [15.8]<br>31.3 [9.2]<br>4.4  | 51.0 [14.9]<br>27.5 [8.1]<br>4.2 | 51.0 [14.9]<br>27.5 [8.1]<br>4.2 | 49.4 [14.5]<br>37.2 [10.9]<br>4.3 | 46.9 [13.7]<br>32.7 [9.6]<br>4.2  | 46.9 [13.7]<br>32.7 [9.6]<br>4.2  | 45.8 [13.4]<br>43.9 [12.9]<br>4.3 | 43.4 [12.7]<br>38.7 [11.3]<br>4.2 | 43.4 [12.7]<br>38.7 [11.3]<br>4.2 |
|                                                  | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 52.1 [15.3]<br>30.3 [8.9]<br>4.6  | 49.5 [14.5]<br>26.7 [7.8]<br>4.5 | 49.5 [14.5]<br>26.7 [7.8]<br>4.5 | 47.7 [14.0]<br>36.2 [10.6]<br>4.6 | 45.3 [13.3]<br>31.9 [9.3]<br>4.4  | 45.3 [13.3]<br>31.9 [9.3]<br>4.4  | 44.1 [12.9]<br>43.0 [12.6]<br>4.5 | 41.9 [12.3]<br>37.8 [11.1]<br>4.4 | 41.9 [12.3]<br>37.8 [11.1]<br>4.4 |
|                                                  | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 50.4 [14.8]<br>29.3 [8.6]<br>4.8  | 47.9 [14.0]<br>25.8 [7.6]<br>4.7 | 47.9 [14.0]<br>25.8 [7.6]<br>4.7 | 46.0 [13.5]<br>35.2 [10.3]<br>4.8 | 43.7 [12.8]<br>31.0 [9.1]<br>4.7  | 43.7 [12.8]<br>31.0 [9.1]<br>4.7  | 42.4 [12.4]<br>42.0 [12.3]<br>4.8 | 40.3 [11.8]<br>36.9 [10.8]<br>4.7 | 40.3 [11.8]<br>36.9 [10.8]<br>4.7 |
|                                                  | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 48.7 [14.3]<br>28.3 [8.3]<br>5.1  | 46.3 [13.6]<br>24.9 [7.3]<br>5.0 | 46.3 [13.6]<br>24.9 [7.3]<br>5.0 | 44.3 [13.0]<br>34.2 [10.0]<br>5.1 | 42.1 [12.3]<br>30.1 [8.8]<br>4.9  | 42.1 [12.3]<br>30.1 [8.8]<br>4.9  | 40.7 [11.9]<br>40.7 [11.9]<br>5.1 | 38.7 [11.3]<br>36.0 [10.6]<br>4.9 | 38.7 [11.3]<br>36.0 [10.6]<br>4.9 |
|                                                  | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 47.0 [13.8]<br>27.3 [8.0]<br>5.4  | 44.7 [13.1]<br>24.0 [7.0]<br>5.2 | 44.7 [13.1]<br>24.0 [7.0]<br>5.2 | 42.6 [12.5]<br>33.2 [9.7]<br>5.4  | 40.5 [11.9]<br>29.2 [8.6]<br>5.2  | 40.5 [11.9]<br>29.2 [8.6]<br>5.2  | 39.0 [11.4]<br>39.0 [11.4]<br>5.3 | 37.1 [10.9]<br>35.1 [10.3]<br>5.2 | 37.1 [10.9]<br>35.1 [10.3]<br>5.2 |

DR —Depression ratio  
dbE —Entering air dry bulbwbE—Entering air wet bulb  
Power —kW input**NOTES:** ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions

## COOLING PERFORMANCE DATA—RACCYC060

| ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①        |                   |                                                |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |                                   |
|--------------------------------------------------|-------------------|------------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| wbE                                              |                   |                                                | 71°F [21.7°C]                     |                                   |                                   | 67°F [19.4°C]                     |                                   |                                   | 63°F [17.2°C]                     |                                   |                                   |
| CFM [L/s]                                        |                   |                                                | 2225 [1050]                       | 1850 [873]                        | 1725 [814]                        | 2225 [1050]                       | 1850 [873]                        | 1725 [814]                        | 2225 [1050]                       | 1850 [873]                        | 1725 [814]                        |
| DR ①                                             |                   |                                                | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               | .05                               | .09                               | .12                               |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F [°C] | 75°F<br>[23.9°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 76.1 [22.3]<br>43.5 [12.7]<br>4.2 | 73.4 [21.5]<br>39.8 [11.7]<br>4.2 | 72.5 [21.2]<br>38.5 [11.3]<br>4.1 | 68.8 [20.2]<br>50.0 [14.7]<br>4.2 | 66.3 [19.4]<br>45.7 [13.4]<br>4.2 | 65.5 [19.2]<br>44.3 [13.0]<br>4.1 | 63.7 [18.7]<br>56.3 [16.5]<br>4.2 | 61.5 [18.0]<br>51.5 [15.1]<br>4.1 | 60.7 [17.8]<br>49.8 [14.6]<br>4.1 |
|                                                  | 80°F<br>[26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 74.4 [21.8]<br>42.6 [12.5]<br>4.4 | 71.7 [21.0]<br>38.9 [11.4]<br>4.4 | 70.9 [20.8]<br>37.7 [11.0]<br>4.3 | 6.07 [19.6]<br>49.1 [14.4]<br>4.4 | 64.6 [18.9]<br>44.9 [13.2]<br>4.4 | 63.9 [18.7]<br>43.5 [12.7]<br>4.3 | 62.0 [18.2]<br>55.4 [16.2]<br>4.4 | 59.8 [17.5]<br>50.6 [14.8]<br>4.3 | 59 [17.3]<br>49 [14.4]<br>4.3     |
|                                                  | 85°F<br>[29.4°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 72.6 [21.3]<br>41.7 [12.2]<br>4.7 | 70.0 [20.5]<br>38.1 [11.2]<br>4.6 | 69.1 [20.3]<br>36.9 [10.8]<br>4.6 | 65.2 [19.1]<br>48.2 [14.1]<br>4.7 | 62.9 [18.4]<br>44.0 [12.9]<br>4.6 | 62.1 [18.2]<br>42.6 [12.5]<br>4.6 | 60.1 [17.6]<br>54.5 [16.0]<br>4.6 | 58.0 [17.0]<br>49.8 [14.6]<br>4.5 | 57.3 [16.8]<br>48.2 [14.1]<br>4.5 |
|                                                  | 90°F<br>[32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 70.7 [20.7]<br>40.7 [11.9]<br>4.9 | 68.2 [20.0]<br>37.2 [10.9]<br>4.8 | 67.3 [19.7]<br>36.0 [10.6]<br>4.8 | 63.3 [18.6]<br>47.2 [13.8]<br>4.9 | 61.1 [17.9]<br>43.1 [12.6]<br>4.8 | 60.3 [17.7]<br>41.8 [12.3]<br>4.8 | 58.3 [17.1]<br>53.5 [15.7]<br>4.8 | 56.2 [16.5]<br>48.9 [14.3]<br>4.7 | 55.5 [16.3]<br>47.3 [13.9]<br>4.7 |
|                                                  | 95°F<br>[35°C]    | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 68.7 [20.1]<br>39.6 [11.6]<br>5.1 | 66.3 [19.4]<br>36.2 [10.6]<br>5.0 | 65.5 [19.2]<br>35.1 [10.3]<br>5.0 | 61.4 [18.0]<br>46.2 [13.5]<br>5.1 | 59.2 [17.4]<br>42.2 [12.4]<br>5.0 | 58.5 [17.1]<br>40.8 [12.0]<br>5.0 | 56.3 [16.5]<br>52.4 [15.4]<br>5.1 | 54.3 [15.9]<br>47.9 [14.0]<br>5.0 | 53.6 [15.7]<br>46.4 [13.6]<br>4.9 |
|                                                  | 100°F<br>[37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 66.7 [19.5]<br>38.5 [11.3]<br>5.3 | 64.4 [18.9]<br>35.2 [10.3]<br>5.2 | 63.6 [18.6]<br>34.1 [10.0]<br>5.2 | 59.4 [17.4]<br>45.1 [13.2]<br>5.3 | 57.3 [16.8]<br>41.2 [12.1]<br>5.2 | 56.6 [16.6]<br>39.9 [11.7]<br>5.2 | 54.3 [15.9]<br>51.4 [15.1]<br>5.3 | 52.4 [15.4]<br>46.9 [13.7]<br>5.2 | 51.7 [15.2]<br>45.4 [13.3]<br>5.1 |
|                                                  | 105°F<br>[40.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 64.7 [19]<br>37.4 [11]<br>5.5     | 62.4 [18.3]<br>34.2 [10.0]<br>5.4 | 61.6 [18.1]<br>33.1 [9.7]<br>5.4  | 57.3 [16.8]<br>43.9 [12.9]<br>5.5 | 55.3 [16.2]<br>40.1 [11.8]<br>5.4 | 54.6 [16.0]<br>38.9 [11.4]<br>5.4 | 52.2 [15.3]<br>50.2 [14.7]<br>5.5 | 50.4 [14.8]<br>45.9 [13.5]<br>5.4 | 49.8 [14.6]<br>44.4 [13.0]<br>5.4 |
|                                                  | 110°F<br>[43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 62.5 [18.3]<br>36.2 [10.6]<br>5.8 | 60.3 [17.7]<br>33.1 [9.7]<br>5.7  | 59.6 [17.5]<br>32.0 [9.4]<br>5.6  | 55.2 [16.2]<br>42.7 [12.5]<br>5.7 | 53.2 [15.6]<br>39.1 [11.5]<br>5.6 | 52.6 [15.4]<br>37.8 [11.1]<br>5.6 | 50.1 [14.7]<br>49.0 [14.4]<br>5.7 | 48.3 [14.2]<br>44.8 [13.1]<br>5.6 | 47.7 [14.0]<br>43.4 [12.7]<br>5.6 |
|                                                  | 115°F<br>[46.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 60.3 [17.7]<br>35.0 [10.3]<br>6.0 | 58.2 [17.1]<br>32.0 [9.4]<br>5.9  | 57.5 [16.9]<br>31.0 [9.1]<br>5.8  | 53 [15.5]<br>41.5 [12.2]<br>6.0   | 51.1 [15.0]<br>37.9 [11.1]<br>5.9 | 50.5 [14.8]<br>36.7 [10.8]<br>5.8 | 47.9 [14.0]<br>47.8 [14.0]<br>5.9 | 46.2 [13.5]<br>43.7 [12.8]<br>5.8 | 45.7 [13.4]<br>42.3 [12.4]<br>5.8 |
|                                                  | 120°F<br>[48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 58.1 [17.0]<br>33.7 [9.9]<br>6.2  | 56.0 [16.4]<br>30.8 [9.0]<br>6.1  | 55.3 [16.2]<br>29.8 [8.7]<br>6.0  | 50.7 [14.9]<br>40.2 [11.8]<br>6.2 | 48.9 [14.3]<br>36.8 [10.8]<br>6.1 | 48.3 [14.2]<br>35.6 [10.4]<br>6.0 | 45.7 [13.4]<br>45.7 [13.4]<br>6.1 | 44.0 [12.9]<br>42.5 [12.5]<br>6.0 | 43.5 [12.7]<br>41.2 [12.1]<br>6.0 |
|                                                  | 125°F<br>[51.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 55.8 [16.4]<br>32.4 [9.5]<br>6.4  | 53.8 [15.8]<br>29.6 [8.7]<br>6.3  | 53.1 [15.6]<br>28.6 [8.4]<br>6.3  | 48.4 [14.2]<br>38.9 [11.4]<br>6.4 | 46.7 [13.7]<br>35.5 [10.4]<br>6.3 | 46.1 [13.5]<br>34.4 [10.1]<br>6.3 | 43.4 [12.7]<br>43.4 [12.7]<br>6.4 | 41.8 [12.3]<br>41.3 [12.1]<br>6.2 | 41.3 [12.1]<br>40.0 [11.7]<br>6.2 |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power—kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[ ] Designates Metric Conversions

## GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYB036

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                |                                                |                                  |                                  |                                  |                                  |                                 |                                 |                                 |                                 |                                 |
|-------------------------------------------|----------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| wbE                                       |                |                                                | 65.3°F [18.5°C]                  |                                  |                                  | 64°F [17.8°C]                    |                                 |                                 | 62.5°F [16.9°C]                 |                                 |                                 |
| CFM [L/s]                                 |                |                                                | 1350 [637]                       | 1168 [551]                       | 1050 [496]                       | 1350 [637]                       | 1168 [551]                      | 1050 [496]                      | 1350 [637]                      | 1168 [551]                      | 1050 [496]                      |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F [15.6°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 18.7 [5.5]<br>2.8 [0.8]<br>2.0   | 18.1 [5.3]<br>2.6 [0.8]<br>2.0   | 17.8 [5.2]<br>2.5 [0.7]<br>2.0   | 18.4 [5.4]<br>4.7 [1.4]<br>2.0   | 17.9 [5.3]<br>4.4 [1.3]<br>2.0  | 17.6 [5.2]<br>4.2 [1.2]<br>2.0  | 17.3 [5.1]<br>5.9 [1.7]<br>2.1  | 16.8 [4.9]<br>5.5 [1.6]<br>2.0  | 16.5 [4.8]<br>5.3 [1.5]<br>2.0  |
|                                           | 70°F [21.1°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 16.9 [5.0]<br>1.8 [0.5]<br>2.1   | 16.5 [4.8]<br>1.7 [0.5]<br>2.0   | 16.2 [4.7]<br>1.6 [0.5]<br>2.0   | 16.7 [4.9]<br>3.7 [1.1]<br>2.1   | 16.3 [4.8]<br>3.5 [1.0]<br>2.0  | 16.0 [4.7]<br>3.3 [1.0]<br>2.0  | 15.6 [4.6]<br>4.9 [1.4]<br>2.1  | 15.2 [4.4]<br>4.6 [1.3]<br>2.1  | 14.9 [4.4]<br>4.4 [1.3]<br>2.0  |
|                                           | 80°F [26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 15.0 [4.4]<br>0.4 [0.1]<br>2.2   | 14.6 [4.3]<br>0.4 [0.1]<br>2.1   | 14.3 [4.2]<br>0.4 [0.1]<br>2.1   | 14.8 [4.3]<br>2.4 [0.7]<br>2.2   | 14.4 [4.2]<br>2.2 [0.7]<br>2.1  | 14.1 [4.1]<br>2.1 [0.6]<br>2.1  | 13.7 [4.0]<br>3.6 [1.1]<br>2.2  | 13.3 [3.9]<br>3.3 [1.0]<br>2.2  | 13.0 [3.8]<br>3.2 [0.9]<br>2.1  |
|                                           | 90°F [32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 12.8 [3.8]<br>-1.2 [-0.4]<br>2.3 | 12.5 [3.7]<br>-1.2 [-0.3]<br>2.3 | 12.3 [3.6]<br>-1.1 [-0.3]<br>2.3 | 12.6 [3.7]<br>0.7 [0.2]<br>2.3   | 12.3 [3.6]<br>0.7 [0.2]<br>2.3  | 12.0 [3.5]<br>0.6 [0.2]<br>2.3  | 11.5 [3.4]<br>1.9 [0.6]<br>2.3  | 11.2 [3.3]<br>1.8 [0.5]<br>2.3  | 11.0 [3.2]<br>1.7 [0.5]<br>2.3  |
|                                           | 100°F [37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 10.4 [3.1]<br>-3.2 [-0.9]<br>2.5 | 10.1 [3.0]<br>-3.0 [-0.9]<br>2.5 | 10.0 [2.9]<br>-2.9 [-0.8]<br>2.5 | 10.2 [3.0]<br>-1.3 [-0.4]<br>2.5 | 9.9 [2.9]<br>-1.2 [-0.4]<br>2.5 | 9.8 [2.9]<br>-1.1 [-0.3]<br>2.5 | 9.1 [2.7]<br>-0.1 [0.0]<br>2.5  | 8.8 [2.6]<br>-0.1 [0.0]<br>2.5  | 8.7 [2.5]<br>-0.1 [0.0]<br>2.5  |
|                                           | 110°F [43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 7.8 [2.3]<br>-5.6 [-1.6]<br>2.8  | 7.6 [2.2]<br>-5.2 [-1.5]<br>2.7  | 7.4 [2.2]<br>-5.0 [-1.5]<br>2.7  | 7.6 [2.2]<br>-3.6 [-1.1]<br>2.8  | 7.4 [2.2]<br>-3.4 [-1.0]<br>2.7 | 7.2 [2.1]<br>-3.2 [-0.9]<br>2.7 | 6.5 [1.9]<br>-2.4 [-0.7]<br>2.8 | 6.3 [1.8]<br>-2.3 [-0.7]<br>2.8 | 6.2 [1.8]<br>-2.1 [-0.6]<br>2.7 |
|                                           | 120°F [48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 4.9 [1.4]<br>-8.2 [-2.4]<br>3.1  | 4.8 [1.4]<br>-7.7 [-2.3]<br>3.1  | 4.7 [1.4]<br>-7.3 [-2.1]<br>3.0  | 4.7 [1.4]<br>-6.3 [-1.8]<br>3.1  | 4.6 [1.3]<br>-5.9 [-1.7]<br>3.0 | 4.5 [1.3]<br>-5.6 [-1.6]<br>3.0 | 3.6 [1.1]<br>-5.1 [-1.5]<br>3.1 | 3.5 [1.0]<br>-4.7 [-1.4]<br>3.1 | 3.4 [1.0]<br>-4.5 [-1.3]<br>3.0 |

## GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYB048

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                |                                                |                                  |                                  |                                  |                                  |                                  |                                  |                                  |                                  |                                  |
|-------------------------------------------|----------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| wbE                                       |                |                                                | 65.3°F [18.5°C]                  |                                  |                                  | 64°F [17.8°C]                    |                                  |                                  | 62.5°F [16.9°C]                  |                                  |                                  |
| CFM [L/s]                                 |                |                                                | 1800 [850]                       | 1519 [717]                       | 1400 [661]                       | 1800 [850]                       | 1519 [717]                       | 1400 [661]                       | 1800 [850]                       | 1519 [717]                       | 1400 [661]                       |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F [15.6°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 25.5 [7.5]<br>2.6 [0.8]<br>2.5   | 24.7 [7.2]<br>2.4 [0.7]<br>2.4   | 24.3 [7.1]<br>2.3 [0.7]<br>2.4   | 24.3 [7.1]<br>5.2 [1.5]<br>2.5   | 23.5 [6.9]<br>4.8 [1.4]<br>2.5   | 23.2 [6.8]<br>4.6 [1.4]<br>2.5   | 22.6 [6.6]<br>6.7 [2.0]<br>2.4   | 21.8 [6.4]<br>6.1 [1.8]<br>2.4   | 21.5 [6.3]<br>5.9 [1.7]<br>2.4   |
|                                           | 70°F [21.1°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 24.1 [7.1]<br>1.9 [0.6]<br>2.6   | 23.3 [6.8]<br>1.8 [0.5]<br>2.5   | 23.0 [6.7]<br>1.7 [0.5]<br>2.5   | 22.9 [6.7]<br>4.5 [1.3]<br>2.7   | 22.2 [6.5]<br>4.2 [1.2]<br>2.6   | 21.8 [6.4]<br>4.0 [1.2]<br>2.6   | 21.2 [6.2]<br>6.0 [1.8]<br>2.6   | 20.5 [6.0]<br>5.5 [1.6]<br>2.5   | 20.2 [5.9]<br>5.3 [1.6]<br>2.5   |
|                                           | 80°F [26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 22.1 [6.5]<br>0.4 [0.1]<br>2.8   | 21.4 [6.3]<br>0.4 [0.1]<br>2.7   | 21.1 [6.2]<br>0.4 [0.1]<br>2.7   | 20.9 [6.1]<br>3.0 [0.9]<br>2.8   | 20.2 [5.9]<br>2.8 [0.8]<br>2.8   | 20.0 [5.8]<br>2.7 [0.8]<br>2.8   | 19.2 [5.6]<br>4.5 [1.3]<br>2.7   | 18.6 [5.4]<br>4.1 [1.2]<br>2.7   | 18.3 [5.4]<br>4.0 [1.2]<br>2.7   |
|                                           | 90°F [32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 19.5 [5.7]<br>-1.9 [-0.5]<br>3.0 | 18.9 [5.5]<br>-1.7 [-0.5]<br>2.9 | 18.6 [5.5]<br>-1.7 [-0.5]<br>2.9 | 18.3 [5.4]<br>0.7 [0.2]<br>3.0   | 17.7 [5.2]<br>0.7 [0.2]<br>3.0   | 17.5 [5.1]<br>0.6 [0.2]<br>3.0   | 16.6 [4.9]<br>2.2 [0.6]<br>3.0   | 16.1 [4.7]<br>2.0 [0.6]<br>2.9   | 15.8 [4.6]<br>1.9 [0.6]<br>2.9   |
|                                           | 100°F [37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 16.4 [4.8]<br>-5.0 [-1.5]<br>3.3 | 15.8 [4.6]<br>-4.6 [-1.4]<br>3.2 | 15.6 [4.6]<br>-4.4 [-1.3]<br>3.2 | 15.2 [4.4]<br>-2.4 [-0.7]<br>3.3 | 14.7 [4.3]<br>-2.2 [-0.7]<br>3.3 | 14.5 [4.2]<br>-2.1 [-0.6]<br>3.3 | 13.4 [3.9]<br>-0.9 [-0.3]<br>3.2 | 13.0 [3.8]<br>-0.9 [-0.3]<br>3.2 | 12.8 [3.8]<br>-0.8 [-0.2]<br>3.2 |
|                                           | 110°F [43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 12.6 [3.7]<br>-9.0 [-2.6]<br>3.6 | 12.2 [3.6]<br>-8.3 [-2.4]<br>3.6 | 12.0 [3.5]<br>-8.0 [-2.3]<br>3.5 | 11.4 [3.3]<br>-6.4 [-1.9]<br>3.7 | 11.0 [3.2]<br>-5.9 [-1.7]<br>3.6 | 10.9 [3.2]<br>-5.6 [-1.7]<br>3.6 | 9.7 [2.8]<br>-4.9 [-1.4]<br>3.6  | 9.4 [2.7]<br>-4.5 [-1.3]<br>3.5  | 9.2 [2.7]<br>-4.3 [-1.3]<br>3.5  |
|                                           | 120°F [48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 8.2 [2.4]<br>-13.7 [-4.0]<br>4.0 | 8.0 [2.3]<br>-12.7 [-3.7]<br>4.0 | 7.9 [2.3]<br>-12.2 [-3.6]<br>3.9 | 7.1 [2.1]<br>-11.1 [-3.3]<br>4.1 | 6.8 [2.0]<br>-10.3 [-3.0]<br>4.0 | 6.7 [2.0]<br>-9.9 [-2.9]<br>4.0  | 5.3 [1.6]<br>-9.7 [-2.8]<br>4.0  | 5.2 [1.5]<br>-8.9 [-2.6]<br>3.9  | 5.1 [1.5]<br>-8.6 [-2.5]<br>3.9  |

DR —Depression ratio  
dbE —Entering air dry bulbwbE—Entering air wet bulb  
Power —kW inputNOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions



## GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYB060

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①           |                   |                   |                 |              |              |               |              |              |                 |             |             |
|-----------------------------------------------------|-------------------|-------------------|-----------------|--------------|--------------|---------------|--------------|--------------|-----------------|-------------|-------------|
| wbE                                                 |                   |                   | 65.3°F [18.5°C] |              |              | 64°F [17.8°C] |              |              | 62.5°F [16.9°C] |             |             |
| CFM [L/s]                                           |                   |                   | 2250 [1062]     | 1825 [861]   | 1750 [826]   | 2250 [1062]   | 1825 [861]   | 1750 [826]   | 2250 [1062]     | 1825 [861]  | 1750 [826]  |
| OUTDOOR<br>DRY<br>BULB<br>TEMPERATURE<br>°F<br>[°C] | 60°F<br>[15.6°C]  | Total kBtu/h [kW] | 29.1 [8.5]      | 27.9 [8.2]   | 27.7 [8.1]   | 28.5 [8.3]    | 27.3 [8.0]   | 27.1 [7.9]   | 26.6 [7.8]      | 25.5 [7.5]  | 25.3 [7.4]  |
|                                                     |                   | Sens kBtu/h [kW]  | 1.9 [0.5]       | 1.7 [0.5]    | 1.7 [0.5]    | 5.1 [1.5]     | 4.6 [1.3]    | 4.5 [1.3]    | 7.9 [2.3]       | 7.1 [2.1]   | 7.0 [2.1]   |
|                                                     |                   | Power             | 3.5             | 3.5          | 3.5          | 3.5           | 3.5          | 3.4          | 3.5             | 3.5         | 3.5         |
|                                                     | 70°F<br>[21.1°C]  | Total kBtu/h [kW] | 27.5 [8.0]      | 26.3 [7.7]   | 26.2 [7.7]   | 26.8 [7.9]    | 25.7 [7.5]   | 25.5 [7.5]   | 24.9 [7.3]      | 23.9 [7.0]  | 23.7 [7.0]  |
|                                                     |                   | Sens kBtu/h [kW]  | 0.6 [0.2]       | 0.6 [0.2]    | 0.6 [0.2]    | 3.8 [1.1]     | 3.4 [1.0]    | 3.4 [1.0]    | 6.7 [2.0]       | 6.0 [1.8]   | 5.9 [1.7]   |
|                                                     |                   | Power             | 3.6             | 3.6          | 3.6          | 3.6           | 3.6          | 3.5          | 3.6             | 3.6         | 3.6         |
|                                                     | 80°F<br>[26.7°C]  | Total kBtu/h [kW] | 25.2 [7.4]      | 24.2 [7.1]   | 24.0 [7.0]   | 24.5 [7.2]    | 23.5 [6.9]   | 23.4 [6.8]   | 22.6 [6.6]      | 21.7 [6.4]  | 21.6 [6.3]  |
|                                                     |                   | Sens kBtu/h [kW]  | -1.2 [-0.4]     | -1.1 [-0.3]  | -1.1 [-0.3]  | 2.0 [0.6]     | 1.8 [0.5]    | 1.8 [0.5]    | 4.8 [1.4]       | 4.4 [1.3]   | 4.3 [1.3]   |
|                                                     |                   | Power             | 3.8             | 3.8          | 3.7          | 3.8           | 3.7          | 3.7          | 3.8             | 3.8         | 3.7         |
|                                                     | 90°F<br>[32.2°C]  | Total kBtu/h [kW] | 22.3 [6.5]      | 21.4 [6.3]   | 21.2 [6.2]   | 21.6 [6.3]    | 20.8 [6.1]   | 20.6 [6.0]   | 19.7 [5.8]      | 18.9 [5.5]  | 18.8 [5.5]  |
|                                                     |                   | Sens kBtu/h [kW]  | -3.6 [-1.1]     | -3.3 [-1.0]  | -3.2 [-0.9]  | -0.4 [-0.1]   | -0.4 [-0.1]  | -0.4 [-0.1]  | 2.4 [0.7]       | 2.2 [0.6]   | 2.1 [0.6]   |
|                                                     |                   | Power             | 4.1             | 4.0          | 4.0          | 4.1           | 4.0          | 4.0          | 4.1             | 4.0         | 4.0         |
|                                                     | 100°F<br>[37.8°C] | Total kBtu/h [kW] | 18.7 [5.5]      | 18.0 [5.3]   | 17.8 [5.2]   | 18.1 [5.3]    | 17.4 [5.1]   | 17.2 [5.1]   | 16.2 [4.7]      | 15.5 [4.6]  | 15.4 [4.5]  |
|                                                     |                   | Sens kBtu/h [kW]  | -6.7 [-1.9]     | -6.0 [-1.8]  | -5.9 [-1.7]  | -3.5 [-1.0]   | -3.1 [-0.9]  | -3.1 [-0.9]  | -0.6 [-0.2]     | -0.6 [-0.2] | -0.5 [-0.2] |
|                                                     |                   | Power             | 4.5             | 4.4          | 4.4          | 4.5           | 4.4          | 4.4          | 4.5             | 4.4         | 4.4         |
|                                                     | 110°F<br>[43.3°C] | Total kBtu/h [kW] | 14.6 [4.3]      | 14.0 [4.1]   | 13.9 [4.1]   | 13.9 [4.1]    | 13.4 [3.9]   | 13.3 [3.9]   | 12.0 [3.5]      | 11.6 [3.4]  | 11.5 [3.4]  |
|                                                     |                   | Sens kBtu/h [kW]  | -10.3 [-3.0]    | -9.3 [-2.7]  | -9.1 [-2.7]  | -7.1 [-2.1]   | -6.4 [-1.9]  | -6.2 [-1.8]  | -4.2 [-1.2]     | -3.8 [-1.1] | -3.7 [-1.1] |
|                                                     |                   | Power             | 5.0             | 4.9          | 4.9          | 5.0           | 4.9          | 4.8          | 5.0             | 4.9         | 4.9         |
|                                                     | 120°F<br>[48.9°C] | Total kBtu/h [kW] | 9.8 [2.9]       | 9.4 [2.8]    | 9.3 [2.7]    | 9.2 [2.7]     | 8.8 [2.6]    | 8.7 [2.6]    | 7.3 [2.1]       | 7.0 [2.0]   | 6.9 [2.0]   |
|                                                     |                   | Sens kBtu/h [kW]  | -14.5 [-4.2]    | -13.0 [-3.8] | -12.8 [-3.7] | -11.3 [-3.3]  | -10.2 [-3.0] | -10.0 [-2.9] | -8.4 [-2.5]     | -7.6 [-2.2] | -7.4 [-2.2] |
|                                                     |                   | Power             | 5.6             | 5.4          | 5.4          | 5.5           | 5.4          | 5.4          | 5.5             | 5.4         | 5.4         |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power—kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions

**GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACCYB072**

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                  |                   |                 |             |             |               |            |            |                 |            |            |
|-------------------------------------------|------------------|-------------------|-----------------|-------------|-------------|---------------|------------|------------|-----------------|------------|------------|
| wbE                                       |                  |                   | 65.3°F [18.5°C] |             |             | 64°F [17.8°C] |            |            | 62.5°F [16.9°C] |            |            |
| CFM [L/s]                                 |                  |                   | 1710 [807]      | 1523 [719]  | 1330 [628]  | 1710 [807]    | 1523 [719] | 1330 [628] | 1710 [807]      | 1523 [719] | 1330 [628] |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F<br>[15.6°C] | Total kBtu/h [kW] | 35.8 [10.5]     | 35.0 [10.3] | 34.2 [10.0] | 32.5 [9.5]    | 31.8 [9.3] | 31.0 [9.1] | 31.4 [9.2]      | 30.7 [9.0] | 30.0 [8.8] |
|                                           |                  | Sens kBtu/h [kW]  | 12.8 [3.7]      | 12.1 [3.5]  | 11.4 [3.3]  | 12.6 [3.7]    | 12.0 [3.5] | 11.3 [3.3] | 16.2 [4.8]      | 15.3 [4.5] | 14.4 [4.2] |
|                                           |                  | Power             | 2.3             | 2.2         | 2.2         | 2.3           | 2.3        | 2.3        | 2.2             | 2.2        | 2.2        |
|                                           | 65°F<br>[18.3°C] | Total kBtu/h [kW] | 34.3 [10.1]     | 33.6 [9.8]  | 32.8 [9.6]  | 31.0 [9.1]    | 30.3 [8.9] | 29.6 [8.7] | 30.0 [8.8]      | 29.3 [8.6] | 28.6 [8.4] |
|                                           |                  | Sens kBtu/h [kW]  | 11.5 [3.4]      | 10.8 [3.2]  | 10.2 [3.0]  | 11.3 [3.3]    | 10.7 [3.1] | 10.1 [3.0] | 14.9 [4.4]      | 14.1 [4.1] | 13.3 [3.9] |
|                                           |                  | Power             | 2.4             | 2.4         | 2.4         | 2.5           | 2.4        | 2.4        | 2.4             | 2.3        | 2.3        |
|                                           | 70°F<br>[21.1°C] | Total kBtu/h [kW] | 32.6 [9.6]      | 31.9 [9.4]  | 31.2 [9.1]  | 29.4 [8.6]    | 28.7 [8.4] | 28.1 [8.2] | 28.3 [8.3]      | 27.7 [8.1] | 27.0 [7.9] |
|                                           |                  | Sens kBtu/h [kW]  | 10.0 [2.9]      | 9.4 [2.8]   | 8.9 [2.6]   | 9.8 [2.9]     | 9.3 [2.7]  | 8.8 [2.6]  | 13.4 [3.9]      | 12.7 [3.7] | 11.9 [3.5] |
|                                           |                  | Power             | 2.6             | 2.6         | 2.5         | 2.6           | 2.6        | 2.6        | 2.5             | 2.5        | 2.5        |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 75°F<br>[23.9°C] | Total kBtu/h [kW] | 30.8 [9.0]      | 30.1 [8.8]  | 29.4 [8.6]  | 27.5 [8.1]    | 26.9 [7.9] | 26.3 [7.7] | 26.4 [7.7]      | 25.8 [7.6] | 25.2 [7.4] |
|                                           |                  | Sens kBtu/h [kW]  | 8.3 [2.4]       | 7.9 [2.3]   | 7.4 [2.2]   | 8.2 [2.4]     | 7.7 [2.3]  | 7.3 [2.1]  | 11.8 [3.4]      | 11.1 [3.3] | 10.5 [3.1] |
|                                           |                  | Power             | 2.8             | 2.8         | 2.7         | 2.8           | 2.8        | 2.8        | 2.7             | 2.7        | 2.7        |
|                                           | 80°F<br>[26.7°C] | Total kBtu/h [kW] | 28.7 [8.4]      | 28.1 [8.2]  | 27.4 [8.0]  | 25.4 [7.4]    | 24.8 [7.3] | 24.3 [7.1] | 24.3 [7.1]      | 23.8 [7.0] | 23.3 [6.8] |
|                                           |                  | Sens kBtu/h [kW]  | 6.5 [1.9]       | 6.1 [1.8]   | 5.8 [1.7]   | 6.4 [1.9]     | 6.0 [1.8]  | 5.7 [1.7]  | 10.0 [2.9]      | 9.4 [2.8]  | 8.9 [2.6]  |
|                                           |                  | Power             | 3.0             | 2.9         | 2.9         | 3.0           | 3.0        | 2.9        | 2.9             | 2.9        | 2.9        |
|                                           | 85°F<br>[29.4°C] | Total kBtu/h [kW] | 26.4 [7.7]      | 25.8 [7.6]  | 25.2 [7.4]  | 23.1 [6.8]    | 22.6 [6.6] | 22.1 [6.5] | 22.0 [6.5]      | 21.6 [6.3] | 21.1 [6.2] |
|                                           |                  | Sens kBtu/h [kW]  | 4.5 [1.3]       | 4.3 [1.3]   | 4.0 [1.2]   | 4.4 [1.3]     | 4.2 [1.2]  | 3.9 [1.1]  | 8.0 [2.3]       | 7.5 [2.2]  | 7.1 [2.1]  |
|                                           |                  | Power             | 3.2             | 3.1         | 3.1         | 3.2           | 3.2        | 3.1        | 3.1             | 3.1        | 3.1        |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 90°F<br>[32.2°C] | Total kBtu/h [kW] | 23.9 [7.0]      | 23.4 [6.9]  | 22.8 [6.7]  | 20.6 [6.0]    | 20.2 [5.9] | 19.7 [5.8] | 19.6 [5.7]      | 19.1 [5.6] | 18.7 [5.5] |
|                                           |                  | Sens kBtu/h [kW]  | 2.4 [0.7]       | 2.2 [0.7]   | 2.1 [0.6]   | 2.2 [0.7]     | 2.1 [0.6]  | 2.0 [0.6]  | 5.8 [1.7]       | 5.5 [1.6]  | 5.2 [1.5]  |
|                                           |                  | Power             | 3.4             | 3.3         | 3.3         | 3.4           | 3.4        | 3.3        | 3.3             | 3.3        | 3.3        |

**GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYB072**

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                   |                   |                 |              |              |               |              |              |                 |             |             |
|-------------------------------------------|-------------------|-------------------|-----------------|--------------|--------------|---------------|--------------|--------------|-----------------|-------------|-------------|
| wbE                                       |                   |                   | 65.3°F [18.5°C] |              |              | 64°F [17.8°C] |              |              | 62.5°F [16.9°C] |             |             |
| CFM [L/s]                                 |                   |                   | 2700 [1274]     | 2404 [1135]  | 2100 [991]   | 2700 [1274]   | 2404 [1135]  | 2100 [991]   | 2700 [1274]     | 2404 [1135] | 2100 [991]  |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F<br>[15.6°C]  | Total kBtu/h [kW] | 44.6 [13.1]     | 43.6 [12.8]  | 42.6 [12.5]  | 43.0 [12.6]   | 42.1 [12.3]  | 41.1 [12.1]  | 39.3 [11.5]     | 38.4 [11.3] | 37.5 [11.0] |
|                                           |                   | Sens kBtu/h [kW]  | 13.3 [3.9]      | 12.6 [3.7]   | 11.8 [3.5]   | 15.5 [4.5]    | 14.7 [4.3]   | 13.8 [4.0]   | 20.2 [5.9]      | 19.1 [5.6]  | 18.0 [5.3]  |
|                                           |                   | Power             | 3.8             | 3.7          | 3.7          | 3.7           | 3.7          | 3.6          | 3.7             | 3.6         | 3.6         |
|                                           | 70°F<br>[21.1°C]  | Total kBtu/h [kW] | 42.4 [12.4]     | 41.5 [12.2]  | 40.6 [11.9]  | 40.9 [12.0]   | 40.0 [11.7]  | 39.1 [11.5]  | 37.1 [10.9]     | 36.3 [10.6] | 35.5 [10.4] |
|                                           |                   | Sens kBtu/h [kW]  | 11.3 [3.3]      | 10.7 [3.1]   | 10.1 [3.0]   | 13.6 [4.0]    | 12.8 [3.8]   | 12.1 [3.5]   | 18.3 [5.4]      | 17.3 [5.1]  | 16.3 [4.8]  |
|                                           |                   | Power             | 3.9             | 3.9          | 3.8          | 3.9           | 3.8          | 3.8          | 3.8             | 3.8         | 3.7         |
|                                           | 80°F<br>[26.7°C]  | Total kBtu/h [kW] | 38.9 [11.4]     | 38.1 [11.2]  | 37.2 [10.9]  | 37.4 [11.0]   | 36.6 [10.7]  | 35.7 [10.5]  | 33.6 [9.9]      | 32.9 [9.6]  | 32.1 [9.4]  |
|                                           |                   | Sens kBtu/h [kW]  | 8.2 [2.4]       | 7.8 [2.3]    | 7.3 [2.1]    | 10.4 [3.1]    | 9.9 [2.9]    | 9.3 [2.7]    | 15.1 [4.4]      | 14.3 [4.2]  | 13.5 [4.0]  |
|                                           |                   | Power             | 4.2             | 4.1          | 4.1          | 4.1           | 4.1          | 4.1          | 4.1             | 4.0         | 4.0         |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 90°F<br>[32.2°C]  | Total kBtu/h [kW] | 34.1 [10.0]     | 33.3 [9.8]   | 32.6 [9.5]   | 32.5 [9.5]    | 31.8 [9.3]   | 31.1 [9.1]   | 28.8 [8.4]      | 28.1 [8.2]  | 27.5 [8.1]  |
|                                           |                   | Sens kBtu/h [kW]  | 3.9 [1.1]       | 3.7 [1.1]    | 3.5 [1.0]    | 6.1 [1.8]     | 5.8 [1.7]    | 5.5 [1.6]    | 10.8 [3.2]      | 10.2 [3.0]  | 9.6 [2.8]   |
|                                           |                   | Power             | 4.5             | 4.5          | 4.4          | 4.5           | 4.5          | 4.4          | 4.4             | 4.4         | 4.4         |
|                                           | 100°F<br>[37.8°C] | Total kBtu/h [kW] | 27.8 [8.2]      | 27.2 [8.0]   | 26.6 [7.8]   | 26.3 [7.7]    | 25.7 [7.5]   | 25.1 [7.4]   | 22.5 [6.6]      | 22.0 [6.5]  | 21.5 [6.3]  |
|                                           |                   | Sens kBtu/h [kW]  | -1.6 [-0.5]     | -1.5 [-0.4]  | -1.4 [-0.4]  | 0.6 [0.2]     | 0.6 [0.2]    | 0.6 [0.2]    | 5.3 [1.6]       | 5.0 [1.5]   | 4.7 [1.4]   |
|                                           |                   | Power             | 5.0             | 4.9          | 4.9          | 5.0           | 4.9          | 4.9          | 4.9             | 4.9         | 4.8         |
|                                           | 110°F<br>[43.3°C] | Total kBtu/h [kW] | 20.2 [5.9]      | 19.8 [5.8]   | 19.3 [5.7]   | 18.7 [5.5]    | 18.3 [5.4]   | 17.9 [5.2]   | 14.9 [4.4]      | 14.6 [4.3]  | 14.2 [4.2]  |
|                                           |                   | Sens kBtu/h [kW]  | -8.3 [-2.4]     | -7.8 [-2.3]  | -7.4 [-2.2]  | -6.1 [-1.8]   | -5.7 [-1.7]  | -5.4 [-1.6]  | -1.4 [-0.4]     | -1.3 [-0.4] | -1.2 [-0.4] |
|                                           |                   | Power             | 5.6             | 5.5          | 5.4          | 5.5           | 5.5          | 5.4          | 5.5             | 5.4         | 5.3         |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 120°F<br>[48.9°C] | Total kBtu/h [kW] | 11.2 [3.3]      | 11.0 [3.2]   | 10.7 [3.1]   | 9.7 [2.8]     | 9.5 [2.8]    | 9.3 [2.7]    | 5.9 [1.7]       | 5.8 [1.7]   | 5.7 [1.7]   |
|                                           |                   | Sens kBtu/h [kW]  | -16.2 [-4.7]    | -15.3 [-4.5] | -14.4 [-4.2] | -14.0 [-4.1]  | -13.2 [-3.9] | -12.4 [-3.6] | -9.3 [-2.7]     | -8.8 [-2.6] | -8.2 [-2.4] |
|                                           |                   | Power             | 6.2             | 6.1          | 6.1          | 6.2           | 6.1          | 6.0          | 6.1             | 6.0         | 6.0         |

DR —Depression ratio  
dbE —Entering air dry bulbwbE—Entering air wet bulb  
Power —kW input**NOTES:** ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions

## GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACCYC036

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                  |                   |                 |             |             |               |            |            |                 |            |            |
|-------------------------------------------|------------------|-------------------|-----------------|-------------|-------------|---------------|------------|------------|-----------------|------------|------------|
| wbE                                       |                  |                   | 65.3°F [18.5°C] |             |             | 64°F [17.8°C] |            |            | 62.5°F [16.9°C] |            |            |
| CFM [L/s]                                 |                  |                   | 900 [425]       | 760 [359]   | 705 [333]   | 900 [425]     | 760 [359]  | 705 [333]  | 900 [425]       | 760 [359]  | 705 [333]  |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F<br>[15.6°C] | Total kBTu/h [kW] | 12.8 [3.7]      | 12.4 [3.6]  | 12.2 [3.6]  | 13.4 [3.9]    | 12.9 [3.8] | 12.8 [3.7] | 13.3 [3.9]      | 12.8 [3.8] | 12.7 [3.7] |
|                                           |                  | Sens kBTu/h [kW]  | 3.1 [0.9]       | 2.9 [0.8]   | 2.8 [0.8]   | 5.0 [1.5]     | 4.6 [1.3]  | 4.4 [1.3]  | 6.8 [2.0]       | 6.3 [1.8]  | 6.0 [1.8]  |
|                                           |                  | Power             | 1.1             | 1.1         | 1.1         | 1.3           | 1.3        | 1.3        | 1.3             | 1.3        | 1.3        |
|                                           | 65°F<br>[18.3°C] | Total kBTu/h [kW] | 12.2 [3.6]      | 11.8 [3.5]  | 11.7 [3.4]  | 12.8 [3.8]    | 12.4 [3.6] | 12.2 [3.6] | 12.7 [3.7]      | 12.3 [3.6] | 12.1 [3.6] |
|                                           |                  | Sens kBTu/h [kW]  | 2.4 [0.7]       | 2.2 [0.6]   | 2.1 [0.6]   | 4.2 [1.2]     | 3.9 [1.1]  | 3.8 [1.1]  | 6.1 [1.8]       | 5.6 [1.6]  | 5.4 [1.6]  |
|                                           |                  | Power             | 1.2             | 1.2         | 1.2         | 1.4           | 1.4        | 1.4        | 1.4             | 1.4        | 1.4        |
|                                           | 70°F<br>[21.1°C] | Total kBTu/h [kW] | 11.6 [3.4]      | 11.2 [3.3]  | 11.1 [3.2]  | 12.2 [3.6]    | 11.8 [3.5] | 11.7 [3.4] | 12.1 [3.5]      | 11.7 [3.4] | 11.5 [3.4] |
|                                           |                  | Sens kBTu/h [kW]  | 1.6 [0.5]       | 1.5 [0.4]   | 1.4 [0.4]   | 3.5 [1.0]     | 3.2 [0.9]  | 3.1 [0.9]  | 5.3 [1.6]       | 4.9 [1.4]  | 4.7 [1.4]  |
|                                           |                  | Power             | 1.3             | 1.3         | 1.3         | 1.5           | 1.5        | 1.5        | 1.5             | 1.5        | 1.5        |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 75°F<br>[23.9°C] | Total kBTu/h [kW] | 10.9 [3.2]      | 10.5 [3.1]  | 10.4 [3.0]  | 11.5 [3.4]    | 11.1 [3.3] | 11.0 [3.2] | 11.4 [3.3]      | 11.0 [3.2] | 10.9 [3.2] |
|                                           |                  | Sens kBTu/h [kW]  | 0.8 [0.2]       | 0.7 [0.2]   | 0.7 [0.2]   | 2.7 [0.8]     | 2.5 [0.7]  | 2.4 [0.7]  | 4.5 [1.3]       | 4.1 [1.2]  | 4.0 [1.2]  |
|                                           |                  | Power             | 1.4             | 1.4         | 1.4         | 1.6           | 1.6        | 1.6        | 1.6             | 1.6        | 1.6        |
|                                           | 80°F<br>[26.7°C] | Total kBTu/h [kW] | 10.1 [3.0]      | 9.8 [2.9]   | 9.7 [2.8]   | 10.7 [3.1]    | 10.4 [3.0] | 10.2 [3.0] | 10.6 [3.1]      | 10.3 [3.0] | 10.1 [3.0] |
|                                           |                  | Sens kBTu/h [kW]  | -0.1 [0.0]      | -0.1 [0.0]  | -0.1 [0.0]  | 1.8 [0.5]     | 1.7 [0.5]  | 1.6 [0.5]  | 3.6 [1.1]       | 3.3 [1.0]  | 3.2 [0.9]  |
|                                           |                  | Power             | 1.5             | 1.5         | 1.5         | 1.7           | 1.7        | 1.7        | 1.7             | 1.7        | 1.7        |
|                                           | 85°F<br>[29.4°C] | Total kBTu/h [kW] | 9.3 [2.7]       | 9.0 [2.6]   | 8.9 [2.6]   | 9.9 [2.9]     | 9.6 [2.8]  | 9.4 [2.8]  | 9.8 [2.9]       | 9.4 [2.8]  | 9.3 [2.7]  |
|                                           |                  | Sens kBTu/h [kW]  | -1.0 [-0.3]     | -0.9 [-0.3] | -0.9 [-0.3] | 0.9 [0.3]     | 0.8 [0.2]  | 0.8 [0.2]  | 2.7 [0.8]       | 2.5 [0.7]  | 2.4 [0.7]  |
|                                           |                  | Power             | 1.6             | 1.6         | 1.6         | 1.8           | 1.8        | 1.8        | 1.8             | 1.8        | 1.8        |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 90°F<br>[32.2°C] | Total kBTu/h [kW] | 8.3 [2.4]       | 8.1 [2.4]   | 8.0 [2.3]   | 8.9 [2.6]     | 8.7 [2.5]  | 8.5 [2.5]  | 8.8 [2.6]       | 8.5 [2.5]  | 8.4 [2.5]  |
|                                           |                  | Sens kBTu/h [kW]  | -1.9 [-0.6]     | -1.8 [-0.5] | -1.7 [-0.5] | 0.0 [0.0]     | 0.0 [0.0]  | 0.0 [0.0]  | 1.8 [0.5]       | 1.6 [0.5]  | 1.6 [0.5]  |
|                                           |                  | Power             | 1.7             | 1.7         | 1.7         | 1.9           | 1.9        | 1.9        | 1.9             | 1.9        | 1.9        |

## GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYC036

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                   |                   |                 |             |             |               |             |             |                 |             |             |
|-------------------------------------------|-------------------|-------------------|-----------------|-------------|-------------|---------------|-------------|-------------|-----------------|-------------|-------------|
| wbE                                       |                   |                   | 65.3°F [18.5°C] |             |             | 64°F [17.8°C] |             |             | 62.5°F [16.9°C] |             |             |
| CFM [L/s]                                 |                   |                   | 1350 [637]      | 1055 [498]  | 1050 [496]  | 1350 [637]    | 1055 [498]  | 1050 [496]  | 1350 [637]      | 1055 [498]  | 1050 [496]  |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F<br>[15.6°C]  | Total kBTu/h [kW] | 16.3 [4.8]      | 15.6 [4.6]  | 15.5 [4.6]  | 16.1 [4.7]    | 15.3 [4.5]  | 15.3 [4.5]  | 14.8 [4.3]      | 14.1 [4.1]  | 14.1 [4.1]  |
|                                           |                   | Sens kBTu/h [kW]  | 0.2 [0.0]       | 0.1 [0.0]   | 0.1 [0.0]   | 1.8 [0.5]     | 1.6 [0.5]   | 1.6 [0.5]   | 3.2 [0.9]       | 2.8 [0.8]   | 2.8 [0.8]   |
|                                           |                   | Power             | 2.1             | 2.0         | 2.0         | 2.2           | 2.1         | 2.1         | 2.1             | 2.0         | 2.0         |
|                                           | 70°F<br>[21.1°C]  | Total kBTu/h [kW] | 15.6 [4.6]      | 14.9 [4.4]  | 14.9 [4.4]  | 15.4 [4.5]    | 14.6 [4.3]  | 14.6 [4.3]  | 14.1 [4.1]      | 13.4 [3.9]  | 13.4 [3.9]  |
|                                           |                   | Sens kBTu/h [kW]  | -0.5 [-0.1]     | -0.4 [-0.1] | -0.4 [-0.1] | 1.1 [0.3]     | 1.0 [0.3]   | 1.0 [0.3]   | 2.5 [0.7]       | 2.2 [0.7]   | 2.2 [0.7]   |
|                                           |                   | Power             | 2.2             | 2.1         | 2.1         | 2.3           | 2.2         | 2.2         | 2.2             | 2.1         | 2.1         |
|                                           | 80°F<br>[26.7°C]  | Total kBTu/h [kW] | 14.6 [4.3]      | 13.8 [4.1]  | 13.8 [4.1]  | 14.3 [4.2]    | 13.6 [4.0]  | 13.6 [4.0]  | 13.0 [3.8]      | 12.4 [3.6]  | 12.4 [3.6]  |
|                                           |                   | Sens kBTu/h [kW]  | -1.5 [-0.4]     | -1.4 [-0.4] | -1.4 [-0.4] | 0.1 [0.0]     | 0.1 [0.0]   | 0.1 [0.0]   | 1.5 [0.4]       | 1.3 [0.4]   | 1.3 [0.4]   |
|                                           |                   | Power             | 2.3             | 2.3         | 2.3         | 2.4           | 2.4         | 2.4         | 2.3             | 2.3         | 2.3         |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 90°F<br>[32.2°C]  | Total kBTu/h [kW] | 13.1 [3.8]      | 12.5 [3.7]  | 12.4 [3.6]  | 12.8 [3.8]    | 12.2 [3.6]  | 12.2 [3.6]  | 11.6 [3.4]      | 11.0 [3.2]  | 11.0 [3.2]  |
|                                           |                   | Sens kBTu/h [kW]  | -2.9 [-0.9]     | -2.6 [-0.8] | -2.6 [-0.8] | -1.3 [-0.4]   | -1.1 [-0.3] | -1.1 [-0.3] | 0.1 [0.0]       | 0.1 [0.0]   | 0.1 [0.0]   |
|                                           |                   | Power             | 2.5             | 2.4         | 2.4         | 2.6           | 2.5         | 2.5         | 2.5             | 2.4         | 2.4         |
|                                           | 100°F<br>[37.8°C] | Total kBTu/h [kW] | 11.3 [3.3]      | 10.7 [3.1]  | 10.7 [3.1]  | 11.0 [3.2]    | 10.5 [3.1]  | 10.4 [3.1]  | 9.7 [2.8]       | 9.3 [2.7]   | 9.2 [2.7]   |
|                                           |                   | Sens kBTu/h [kW]  | -4.7 [-1.4]     | -4.1 [-1.2] | -4.1 [-1.2] | -3.0 [-0.9]   | -2.7 [-0.8] | -2.7 [-0.8] | -1.6 [-0.5]     | -1.4 [-0.4] | -1.4 [-0.4] |
|                                           |                   | Power             | 2.7             | 2.6         | 2.6         | 2.8           | 2.7         | 2.7         | 2.7             | 2.6         | 2.6         |
|                                           | 110°F<br>[43.3°C] | Total kBTu/h [kW] | 9.1 [2.7]       | 8.6 [2.5]   | 8.6 [2.5]   | 8.8 [2.6]     | 8.4 [2.5]   | 8.4 [2.4]   | 7.5 [2.2]       | 7.2 [2.1]   | 7.2 [2.1]   |
|                                           |                   | Sens kBTu/h [kW]  | -6.8 [-2.0]     | -6.0 [-1.8] | -6.0 [-1.8] | 5.1 [-1.5]    | -4.5 [-1.3] | -4.5 [-1.3] | -3.8 [-1.1]     | -3.3 [-1.0] | -3.3 [-1.0] |
|                                           |                   | Power             | 2.9             | 2.8         | 2.8         | 3.0           | 2.9         | 2.9         | 2.9             | 2.8         | 2.8         |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 120°F<br>[48.9°C] | Total kBTu/h [kW] | 6.5 [1.9]       | 6.2 [1.8]   | 6.2 [1.8]   | 6.2 [1.8]     | 5.9 [1.7]   | 5.9 [1.7]   | 4.9 [1.4]       | 4.7 [1.4]   | 4.7 [1.4]   |
|                                           |                   | Sens kBTu/h [kW]  | -9.3 [-2.7]     | -8.2 [-2.4] | -8.2 [-2.4] | -7.6 [-2.2]   | -6.7 [-2.0] | -6.7 [-2.0] | -6.2 [-1.8]     | -5.5 [-1.6] | -5.5 [-1.6] |
|                                           |                   | Power             | 3.1             | 3.1         | 3.1         | 3.2           | 3.1         | 3.1         | 3.1             | 3.0         | 3.0         |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[ ] Designates Metric Conversions

**GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACCYC048**

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |               |                                                |                                |                                |                                |                                |                                |                                |                                |                                |                                |
|-------------------------------------------|---------------|------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| wbE                                       |               | 65.3°F [18.5°C]                                |                                |                                | 64°F [17.8°C]                  |                                |                                | 62.5°F [16.9°C]                |                                |                                |                                |
| CFM [L/s]                                 |               | 1200 [566]                                     | 875 [413]                      | 940 [444]                      | 1200 [566]                     | 875 [413]                      | 940 [444]                      | 1200 [566]                     | 875 [413]                      | 940 [444]                      |                                |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F [15.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 15.0 [4.4]<br>0.3 [0.1]<br>2.4 | 14.1 [4.1]<br>0.3 [0.1]<br>2.3 | 14.2 [4.2]<br>0.3 [0.1]<br>2.3 | 13.1 [3.8]<br>0.4 [0.1]<br>2.4 | 12.2 [3.6]<br>0.4 [0.1]<br>2.3 | 12.4 [3.6]<br>0.4 [0.1]<br>2.4 | 14.5 [4.3]<br>4.0 [1.2]<br>2.1 | 13.6 [4.0]<br>3.4 [1.0]<br>2.0 | 13.8 [4.0]<br>3.6 [1.0]<br>2.0 |
|                                           | 65°F [18.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 16.1 [4.7]<br>1.5 [0.4]<br>2.2 | 15.1 [4.4]<br>1.3 [0.4]<br>2.1 | 15.3 [4.5]<br>1.3 [0.4]<br>2.1 | 14.1 [4.1]<br>1.6 [0.5]<br>2.2 | 13.2 [3.9]<br>1.3 [0.4]<br>2.2 | 13.4 [3.9]<br>1.4 [0.4]<br>2.2 | 15.6 [4.6]<br>5.2 [1.5]<br>1.9 | 14.6 [4.3]<br>4.4 [1.3]<br>1.8 | 14.8 [4.3]<br>4.5 [1.3]<br>1.8 |
|                                           | 70°F [21.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 16.8 [4.9]<br>2.2 [0.6]<br>2.1 | 15.7 [4.6]<br>1.9 [0.6]<br>2.0 | 15.9 [4.7]<br>2.0 [0.6]<br>2.0 | 14.8 [4.3]<br>2.3 [0.7]<br>2.1 | 13.9 [4.1]<br>2.0 [0.6]<br>2.1 | 14.1 [4.1]<br>2.0 [0.6]<br>2.1 | 16.3 [4.8]<br>5.9 [1.7]<br>1.8 | 15.3 [4.5]<br>5.0 [1.5]<br>1.7 | 15.5 [4.5]<br>5.2 [1.5]<br>1.7 |
|                                           | 75°F [23.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 17.1 [5.0]<br>2.6 [0.8]<br>2.0 | 16.0 [4.7]<br>2.2 [0.6]<br>1.9 | 16.2 [4.8]<br>2.3 [0.7]<br>1.9 | 15.1 [4.4]<br>2.7 [0.8]<br>2.0 | 14.2 [4.2]<br>2.3 [0.7]<br>2.0 | 14.4 [4.2]<br>2.4 [0.7]<br>2.0 | 16.6 [4.9]<br>6.3 [1.8]<br>1.7 | 15.6 [4.6]<br>5.3 [1.6]<br>1.6 | 15.8 [4.6]<br>5.5 [1.6]<br>1.7 |
|                                           | 80°F [26.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 17.0 [5.0]<br>2.6 [0.8]<br>2.0 | 16.0 [4.7]<br>2.2 [0.6]<br>1.9 | 16.2 [4.7]<br>2.3 [0.7]<br>1.9 | 15.1 [4.4]<br>2.7 [0.8]<br>2.0 | 14.1 [4.1]<br>2.3 [0.7]<br>2.0 | 14.3 [4.2]<br>2.3 [0.7]<br>2.0 | 16.6 [4.9]<br>6.2 [1.8]<br>1.7 | 15.5 [4.6]<br>5.3 [1.6]<br>1.6 | 15.7 [4.6]<br>5.5 [1.6]<br>1.6 |
|                                           | 85°F [29.4°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 16.6 [4.9]<br>2.2 [0.6]<br>2.0 | 15.6 [4.6]<br>1.8 [0.5]<br>1.9 | 15.8 [4.6]<br>1.9 [0.6]<br>1.9 | 14.7 [4.3]<br>2.3 [0.7]<br>2.0 | 13.7 [4.0]<br>1.9 [0.6]<br>2.0 | 13.9 [4.1]<br>2.0 [0.6]<br>2.0 | 16.1 [4.7]<br>5.8 [1.7]<br>1.7 | 15.1 [4.4]<br>5.0 [1.5]<br>1.6 | 15.3 [4.5]<br>5.2 [1.5]<br>1.7 |
|                                           | 90°F [32.2°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 15.8 [4.6]<br>1.4 [0.4]<br>2.1 | 14.8 [4.3]<br>1.2 [0.3]<br>2.0 | 15.0 [4.4]<br>1.2 [0.4]<br>2.0 | 13.8 [4.1]<br>1.5 [0.4]<br>2.1 | 13.0 [3.8]<br>1.3 [0.4]<br>2.1 | 13.1 [3.8]<br>1.3 [0.4]<br>2.1 | 15.3 [4.5]<br>5.1 [1.5]<br>1.8 | 14.4 [4.2]<br>4.3 [1.3]<br>1.7 | 14.6 [4.3]<br>4.5 [1.3]<br>1.7 |

**GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYC048**

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                |                                                |                                  |                                  |                                  |                                  |                                 |                                 |                                  |                                  |                                  |
|-------------------------------------------|----------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|----------------------------------|----------------------------------|
| wbE                                       |                | 65.3°F [18.5°C]                                |                                  |                                  | 64°F [17.8°C]                    |                                  |                                 | 62.5°F [16.9°C]                 |                                  |                                  |                                  |
| CFM [L/s]                                 |                | 1800 [850]                                     | 1460 [689]                       | 1400 [661]                       | 1800 [850]                       | 1460 [689]                       | 1400 [661]                      | 1800 [850]                      | 1460 [689]                       | 1400 [661]                       |                                  |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F [15.6°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 25.4 [7.4]<br>6.8 [2.0]<br>2.5   | 24.3 [7.1]<br>6.1 [1.8]<br>2.5   | 24.1 [7.1]<br>6.0 [1.8]<br>2.5   | 24.6 [7.2]<br>7.1 [2.1]<br>2.4   | 23.6 [6.9]<br>6.4 [1.9]<br>2.4  | 23.4 [6.9]<br>6.3 [1.9]<br>2.4  | 21.6 [6.3]<br>4.6 [1.4]<br>2.2   | 20.7 [6.1]<br>4.2 [1.2]<br>2.2   | 20.5 [6.0]<br>4.1 [1.2]<br>2.2   |
|                                           | 70°F [21.1°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 23.5 [6.9]<br>5.4 [1.6]<br>2.7   | 22.5 [6.6]<br>4.9 [1.4]<br>2.6   | 22.4 [6.6]<br>4.8 [1.4]<br>2.6   | 22.7 [6.7]<br>5.7 [1.7]<br>2.6   | 21.8 [6.4]<br>5.2 [1.5]<br>2.6  | 21.6 [6.3]<br>5.1 [1.5]<br>2.5  | 19.7 [5.8]<br>3.2 [1.0]<br>2.4   | 18.9 [5.5]<br>2.9 [0.9]<br>2.4   | 18.7 [5.5]<br>2.9 [0.8]<br>2.4   |
|                                           | 80°F [26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 21.4 [6.3]<br>3.7 [1.1]<br>2.9   | 20.5 [6.0]<br>3.4 [1.0]<br>2.9   | 20.4 [6]<br>3.3 [1]<br>2.9       | 20.6 [6.1]<br>4.1 [1.2]<br>2.9   | 19.8 [5.8]<br>3.7 [1.1]<br>2.8  | 19.7 [5.8]<br>3.6 [1.1]<br>2.8  | 17.6 [5.2]<br>1.6 [0.5]<br>2.7   | 16.9 [4.9]<br>1.4 [0.4]<br>2.6   | 16.8 [4.9]<br>1.4 [0.4]<br>2.6   |
|                                           | 90°F [32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 19.1 [5.6]<br>1.8 [0.5]<br>3.3   | 18.3 [5.4]<br>1.6 [0.5]<br>3.2   | 18.2 [5.3]<br>1.6 [0.5]<br>3.2   | 18.4 [5.4]<br>2.1 [0.6]<br>3.2   | 17.6 [5.2]<br>1.9 [0.6]<br>3.1  | 17.5 [5.1]<br>1.9 [0.5]<br>3.1  | 15.3 [4.5]<br>-0.4 [-0.1]<br>3.0 | 14.7 [4.3]<br>-0.4 [-0.1]<br>2.9 | 14.6 [4.3]<br>-0.3 [-0.1]<br>2.9 |
|                                           | 100°F [37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 16.6 [4.9]<br>-0.5 [-0.1]<br>3.7 | 16.0 [4.7]<br>-0.4 [-0.1]<br>3.6 | 15.8 [4.6]<br>-0.4 [-0.1]<br>3.6 | 15.9 [4.7]<br>-0.1 [0.0]<br>3.6  | 15.2 [4.5]<br>-0.1 [0.0]<br>3.5 | 15.1 [4.4]<br>-0.1 [0.0]<br>3.5 | 12.8 [3.8]<br>-2.6 [-0.8]<br>3.4 | 12.3 [3.6]<br>-2.4 [-0.7]<br>3.3 | 12.2 [3.6]<br>-2.3 [-0.7]<br>3.3 |
|                                           | 110°F [43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 14.0 [4.1]<br>-3.0 [-0.9]<br>4.2 | 13.4 [3.9]<br>-2.7 [-0.8]<br>4.1 | 13.3 [3.9]<br>-2.7 [-0.8]<br>4.1 | 13.2 [3.9]<br>-2.7 [-0.8]<br>4.1 | 12.7 [3.7]<br>-2.4 [-0.7]<br>4  | 12.6 [3.7]<br>-2.3 [-0.7]<br>4  | 10.2 [3.0]<br>-5.2 [-1.5]<br>3.9 | 9.7 [2.9]<br>-4.7 [-1.4]<br>3.8  | 9.7 [2.8]<br>-4.6 [-1.3]<br>3.8  |
|                                           | 120°F [48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 11.1 [3.2]<br>-5.8 [-1.7]<br>4.7 | 10.6 [3.1]<br>-5.2 [-1.5]<br>4.7 | 10.6 [3.1]<br>-5.1 [-1.5]<br>4.6 | 10.3 [3.0]<br>-5.5 [-1.6]<br>4.7 | 9.9 [2.9]<br>-4.9 [-1.4]<br>4.6 | 9.8 [2.9]<br>-4.8 [-1.4]<br>4.5 | 7.3 [2.1]<br>-8.0 [-2.3]<br>4.5  | 7.0 [2.0]<br>-7.2 [-2.1]<br>4.4  | 6.9 [2.0]<br>-7.0 [-2.1]<br>4.4  |

DR —Depression ratio  
dbE —Entering air dry bulbwbE—Entering air wet bulb  
Power —kW input**NOTES:** ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding  $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ .

[ ] Designates Metric Conversions

## GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACCYC060

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |               |                                                |                                |                                |                                |                                |                                |                                |                                 |                                |                                |
|-------------------------------------------|---------------|------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|---------------------------------|--------------------------------|--------------------------------|
| wbE                                       |               | 65.3°F [18.5°C]                                |                                |                                | 64°F [17.8°C]                  |                                |                                | 62.5°F [16.9°C]                |                                 |                                |                                |
| CFM [L/s]                                 |               | 1500 [708]                                     | 1215 [573]                     | 1175 [555]                     | 1500 [708]                     | 1215 [573]                     | 1175 [555]                     | 1500 [708]                     | 1215 [573]                      | 1175 [555]                     |                                |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F [15.6°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 26.3 [7.7]<br>7.2 [2.1]<br>1.9 | 25.3 [7.4]<br>6.5 [1.9]<br>1.9 | 25.1 [7.4]<br>6.4 [1.9]<br>1.9 | 24.8 [7.3]<br>8.1 [2.4]<br>1.9 | 23.8 [7.0]<br>7.3 [2.1]<br>1.9 | 23.7 [6.9]<br>7.2 [2.1]<br>1.9 | 24.0 [7.0]<br>10.0 [2.9]<br>2.3 | 23.1 [6.8]<br>9.0 [2.6]<br>2.3 | 22.9 [6.7]<br>8.9 [2.6]<br>2.3 |
|                                           | 65°F [18.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 25.7 [7.5]<br>6.8 [2.0]<br>2.0 | 24.7 [7.2]<br>6.1 [1.8]<br>1.9 | 24.5 [7.2]<br>6.0 [1.8]<br>1.9 | 24.2 [7.1]<br>7.7 [2.3]<br>2.0 | 23.2 [6.8]<br>7.0 [2.0]<br>2.0 | 23.1 [6.8]<br>6.9 [2.0]<br>2.0 | 23.4 [6.9]<br>9.6 [2.8]<br>2.4  | 22.5 [6.6]<br>8.7 [2.5]<br>2.4 | 22.3 [6.5]<br>8.5 [2.5]<br>2.3 |
|                                           | 70°F [21.1°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 25.0 [7.3]<br>6.3 [1.9]<br>2.0 | 24.0 [7.0]<br>5.7 [1.7]<br>2.0 | 23.8 [7.0]<br>5.6 [1.6]<br>2.0 | 23.5 [6.9]<br>7.2 [2.1]<br>2.1 | 22.5 [6.6]<br>6.5 [1.9]<br>2.0 | 22.4 [6.6]<br>6.4 [1.9]<br>2.0 | 22.7 [6.6]<br>9.1 [2.7]<br>2.5  | 21.8 [6.4]<br>8.2 [2.4]<br>2.4 | 21.6 [6.3]<br>8.1 [2.4]<br>2.4 |
|                                           | 75°F [23.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 24.1 [7.1]<br>5.7 [1.7]<br>2.1 | 23.1 [6.8]<br>5.1 [1.5]<br>2.1 | 23.0 [6.7]<br>5.0 [1.5]<br>2.1 | 22.6 [6.6]<br>6.6 [1.9]<br>2.2 | 21.6 [6.3]<br>6.0 [1.7]<br>2.1 | 21.5 [6.3]<br>5.9 [1.7]<br>2.1 | 21.8 [6.4]<br>8.5 [2.5]<br>2.6  | 20.9 [6.1]<br>7.7 [2.2]<br>2.5 | 20.8 [6.1]<br>7.5 [2.2]<br>2.5 |
|                                           | 80°F [26.7°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 23.1 [6.8]<br>4.9 [1.4]<br>2.2 | 22.1 [6.5]<br>4.4 [1.3]<br>2.2 | 22.0 [6.4]<br>4.4 [1.3]<br>2.2 | 21.5 [6.3]<br>5.8 [1.7]<br>2.3 | 20.6 [6.0]<br>5.3 [1.5]<br>2.2 | 20.5 [6.0]<br>5.2 [1.5]<br>2.2 | 20.7 [6.1]<br>7.7 [2.3]<br>2.7  | 19.9 [5.8]<br>7.0 [2.0]<br>2.6 | 19.8 [5.8]<br>6.9 [2.0]<br>2.6 |
|                                           | 85°F [29.4°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 21.9 [6.4]<br>4.0 [1.2]<br>2.4 | 2.0 [6.1]<br>3.6 [1.1]<br>2.3  | 20.8 [6.1]<br>3.6 [1.0]<br>2.3 | 20.3 [6.0]<br>5.0 [1.5]<br>2.4 | 19.5 [5.7]<br>4.5 [1.3]<br>2.4 | 19.4 [5.7]<br>4.4 [1.3]<br>2.4 | 19.6 [5.7]<br>6.8 [2.0]<br>2.8  | 18.8 [5.5]<br>6.2 [1.8]<br>2.8 | 18.6 [5.5]<br>6.1 [1.8]<br>2.8 |
|                                           | 90°F [32.2°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 20.5 [6.0]<br>3.0 [0.9]<br>2.5 | 19.7 [5.8]<br>2.7 [0.8]<br>2.5 | 19.6 [5.7]<br>2.7 [0.8]<br>2.5 | 19.0 [5.6]<br>3.9 [1.2]<br>2.6 | 18.2 [5.3]<br>3.5 [1.0]<br>2.5 | 18.1 [5.3]<br>3.5 [1.0]<br>2.5 | 18.2 [5.3]<br>5.8 [1.7]<br>3.0  | 17.5 [5.1]<br>5.2 [1.5]<br>2.9 | 17.4 [5.1]<br>5.2 [1.5]<br>2.9 |

## GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACCYC060

| ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ① |                |                                                |                                  |                                  |                                  |                                  |                                  |                                  |                                  |                                 |                                 |
|-------------------------------------------|----------------|------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|
| wbE                                       |                | 65.3°F [18.5°C]                                |                                  |                                  | 64°F [17.8°C]                    |                                  |                                  | 62.5°F [16.9°C]                  |                                  |                                 |                                 |
| CFM [L/s]                                 |                | 2250 [1062]                                    | 1840 [868]                       | 1750 [826]                       | 2250 [1062]                      | 1840 [868]                       | 1750 [826]                       | 2250 [1062]                      | 1840 [868]                       | 1750 [826]                      |                                 |
| OUTDOOR DRY BULB TEMPERATURE<br>°F [°C]   | 60°F [15.6°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 37.3 [10.9]<br>20.1 [5.9]<br>3.2 | 35.8 [10.5]<br>18.2 [5.3]<br>3.1 | 35.5 [10.4]<br>17.8 [5.2]<br>3.1 | 35.2 [10.3]<br>18.6 [5.5]<br>3.0 | 33.9 [9.9]<br>16.9 [4.9]<br>3.0  | 33.6 [9.8]<br>16.5 [4.8]<br>3.0  | 34.4 [10.1]<br>20.6 [6.0]<br>3.1 | 33.0 [9.7]<br>18.6 [5.5]<br>3.1 | 32.7 [9.6]<br>18.2 [5.3]<br>3.1 |
|                                           | 70°F [21.1°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 35.3 [10.3]<br>18.2 [5.3]<br>3.3 | 33.9 [9.9]<br>16.5 [4.8]<br>3.2  | 33.6 [9.9]<br>16.1 [4.7]<br>3.2  | 33.3 [9.8]<br>16.7 [4.9]<br>3.2  | 32.0 [9.4]<br>15.1 [4.4]<br>3.1  | 31.7 [9.3]<br>14.8 [4.3]<br>3.1  | 32.4 [9.5]<br>18.7 [5.5]<br>3.3  | 31.2 [9.1]<br>16.9 [5.0]<br>3.2 | 30.9 [9.1]<br>16.5 [4.8]<br>3.2 |
|                                           | 80°F [26.7°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 32.8 [9.6]<br>15.7 [4.6]<br>3.6  | 31.5 [9.2]<br>14.2 [4.2]<br>3.5  | 31.3 [9.2]<br>13.9 [4.1]<br>3.5  | 30.8 [9.0]<br>14.2 [4.2]<br>3.5  | 29.6 [8.7]<br>12.9 [3.8]<br>3.4  | 29.3 [8.6]<br>12.6 [3.7]<br>3.4  | 29.9 [8.8]<br>16.2 [4.7]<br>3.6  | 28.8 [8.4]<br>14.6 [4.3]<br>3.5 | 28.5 [8.4]<br>14.3 [4.2]<br>3.5 |
|                                           | 90°F [32.2°C]  | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 29.7 [8.7]<br>12.6 [3.7]<br>3.9  | 28.6 [8.4]<br>11.4 [3.3]<br>3.9  | 28.3 [8.3]<br>11.1 [3.3]<br>3.8  | 27.7 [8.1]<br>11.1 [3.3]<br>3.8  | 26.6 [7.8]<br>10.1 [3.0]<br>3.7  | 26.4 [7.7]<br>9.8 [2.9]<br>3.7   | 26.9 [7.9]<br>13.1 [3.8]<br>3.9  | 25.8 [7.6]<br>11.8 [3.5]<br>3.8 | 25.6 [7.5]<br>11.6 [3.4]<br>3.8 |
|                                           | 100°F [37.8°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 26.1 [7.7]<br>8.9 [2.6]<br>4.4   | 25.1 [7.4]<br>8.1 [2.4]<br>4.3   | 24.9 [7.3]<br>7.9 [2.3]<br>4.3   | 24.1 [7.1]<br>7.4 [2.2]<br>4.3   | 23.1 [6.8]<br>6.7 [2.0]<br>4.2   | 22.9 [6.7]<br>6.6 [1.9]<br>4.2   | 23.2 [6.8]<br>9.4 [2.7]<br>4.4   | 22.3 [6.5]<br>8.5 [2.5]<br>4.3  | 22.1 [6.5]<br>8.3 [2.4]<br>4.3  |
|                                           | 110°F [43.3°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 21.9 [6.4]<br>4.6 [1.4]<br>4.9   | 21.1 [6.2]<br>4.2 [1.2]<br>4.8   | 20.9 [6.1]<br>4.1 [1.2]<br>4.8   | 19.9 [5.8]<br>3.2 [0.9]<br>4.8   | 19.1 [5.6]<br>2.9 [0.8]<br>4.7   | 18.9 [5.5]<br>2.8 [0.8]<br>4.7   | 19.0 [5.6]<br>5.1 [1.5]<br>4.9   | 18.3 [5.4]<br>4.6 [1.4]<br>4.8  | 18.1 [5.3]<br>4.5 [1.3]<br>4.8  |
|                                           | 120°F [48.9°C] | Total kBtu/h [kW]<br>Sens kBtu/h [kW]<br>Power | 17.2 [5.0]<br>-0.3 [-0.1]<br>5.6 | 16.5 [4.8]<br>-0.2 [-0.1]<br>5.5 | 16.3 [4.8]<br>-0.2 [-0.1]<br>5.4 | 15.1 [4.4]<br>-1.7 [-0.5]<br>5.5 | 14.5 [4.3]<br>-1.6 [-0.5]<br>5.4 | 14.4 [4.2]<br>-1.5 [-0.4]<br>5.3 | 14.3 [4.2]<br>0.2 [0.1]<br>5.6   | 13.7 [4.0]<br>0.2 [0.1]<br>5.4  | 13.6 [4.0]<br>0.2 [0.1]<br>5.4  |

DR —Depression ratio  
dbE —Entering air dry bulb

wbE—Entering air wet bulb  
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[ ] Designates Metric Conversions

### 3-6T—LOW STATIC—SIDEFLOW (208/230V, 575V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W] | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |              |              |              |              |
|-------------------------|---------------------------------------------------------------|-----------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                         |                                                               |                 |                         |               | 0.1<br>[.02]                                 | 0.2<br>[.05] | 0.3<br>[.07] | 0.4<br>[.10] | 0.5<br>[.12] | 0.6<br>[.15] | 0.7<br>[.17] | 0.8<br>[.20] |
| RACCYB036 (3T)          | 1050/1350                                                     | 3/4 HP<br>[559] | Fan Only -<br>Tap 1     | CFM           | 1312                                         | 1025         | 815          | 735          | 646          | 545          | 473          | 402          |
|                         |                                                               |                 |                         | WATTS         | 152                                          | 116          | 104          | 112          | 119          | 126          | 131          | 138          |
|                         |                                                               | 3/4 HP<br>[559] | Low Heat -<br>Tap 2     | CFM           | 1603                                         | 1523         | 1448         | 1382         | 1300         | 1241         | 1174         | 1116         |
|                         |                                                               |                 |                         | WATTS         | 233                                          | 246          | 260          | 272          | 285          | 297          | 309          | 320          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 3    | CFM           | 1856                                         | 1792         | 1703         | 1646         | 1589         | 1511         | 1459         | 1399         |
|                         |                                                               |                 |                         | WATTS         | 338                                          | 354          | 367          | 380          | 395          | 412          | 424          | 440          |
|                         |                                                               | 3/4 HP<br>[559] | Rated Cool -<br>Tap 4*  | CFM           | 1603                                         | 1523         | 1448         | 1382         | 1300         | 1241         | 1174         | 1116         |
|                         |                                                               |                 |                         | WATTS         | 233                                          | 246          | 260          | 272          | 285          | 297          | 309          | 320          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 1865                                         | 1797         | 1735         | 1670         | 1604         | 1537         | 1471         | 1422         |
|                         |                                                               |                 |                         | WATTS         | 348                                          | 363          | 377          | 392          | 409          | 425          | 441          | 453          |
| RACCYB048 (4T)          | 1400/1800                                                     | 3/4 HP<br>[559] | Fan Only -<br>Tap 1     | CFM           | 1379                                         | 1072         | 903          | 829          | 757          | 682          | 589          | 515          |
|                         |                                                               |                 |                         | WATTS         | 168                                          | 124          | 122          | 131          | 139          | 146          | 155          | 162          |
|                         |                                                               | 3/4 HP<br>[559] | Low Heat -<br>Tap 2     | CFM           | 1785                                         | 1727         | 1662         | 1606         | 1554         | 1475         | 1415         | 1368         |
|                         |                                                               |                 |                         | WATTS         | 319                                          | 336          | 354          | 369          | 383          | 402          | 419          | 434          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 3    | CFM           | 1851                                         | 1794         | 1733         | 1677         | 1626         | 1569         | 1484         | 1429         |
|                         |                                                               |                 |                         | WATTS         | 352                                          | 370          | 388          | 404          | 418          | 433          | 452          | 468          |
|                         |                                                               | 3/4 HP<br>[559] | Rated Cool -<br>Tap 4*  | CFM           | 1905                                         | 1850         | 1791         | 1734         | 1684         | 1630         | 1543         | 1488         |
|                         |                                                               |                 |                         | WATTS         | 378                                          | 396          | 415          | 432          | 447          | 462          | 483          | 498          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 2035                                         | 1985         | 1928         | 1872         | 1824         | 1777         | 1730         | 1652         |
|                         |                                                               |                 |                         | WATTS         | 450                                          | 468          | 488          | 509          | 526          | 543          | 560          | 583          |
| RACCYB060 (5T)          | 1750/2250                                                     | 1 HP<br>[745]   | Fan Only -<br>Tap 1     | CFM           | 1295                                         | 1092         | 991          | 910          | 839          | 758          | 666          | 592          |
|                         |                                                               |                 |                         | WATTS         | 155                                          | 132          | 144          | 152          | 161          | 171          | 180          | 187          |
|                         |                                                               | 1 HP<br>[745]   | Low Heat -<br>Tap 2     | CFM           | 1685                                         | 1621         | 1562         | 1514         | 1459         | 1372         | 1310         | 1257         |
|                         |                                                               |                 |                         | WATTS         | 288                                          | 303          | 318          | 332          | 347          | 364          | 377          | 391          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 3    | CFM           | 1887                                         | 1829         | 1781         | 1731         | 1678         | 1636         | 1564         | 1495         |
|                         |                                                               |                 |                         | WATTS         | 390                                          | 407          | 423          | 439          | 456          | 471          | 491          | 508          |
|                         |                                                               | 1 HP<br>[745]   | Rated Cool -<br>Tap 4*  | CFM           | 2179                                         | 2136         | 2087         | 2035         | 1989         | 1955         | 1912         | 1868         |
|                         |                                                               |                 |                         | WATTS         | 580                                          | 598          | 618          | 638          | 657          | 674          | 692          | 711          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 2296                                         | 2244         | 2207         | 2152         | 2115         | 2066         | 2034         | 1987         |
|                         |                                                               |                 |                         | WATTS         | 668                                          | 689          | 709          | 730          | 750          | 771          | 789          | 811          |
| RACCYB072 (6T)          | 2100/2700                                                     | 1.2 HP<br>[895] | Fan/Low Heat -<br>Tap 1 | CFM           | 1429                                         | 1366         | 1299         | 1227         | 1134         | 1072         | 1009         | 950          |
|                         |                                                               |                 |                         | WATTS         | 169                                          | 180          | 191          | 204          | 216          | 227          | 237          | 245          |
|                         |                                                               | 1.2 HP<br>[895] | High Heat -<br>Tap 2    | CFM           | 1946                                         | 1899         | 1850         | 1800         | 1752         | 1701         | 1652         | 1589         |
|                         |                                                               |                 |                         | WATTS         | 362                                          | 377          | 393          | 408          | 423          | 439          | 454          | 473          |
|                         |                                                               | 1.2 HP<br>[895] | Low Cool -<br>Tap 3     | CFM           | 1602                                         | 1542         | 1484         | 1425         | 1358         | 1271         | 1213         | 1155         |
|                         |                                                               |                 |                         | WATTS         | 221                                          | 233          | 246          | 258          | 273          | 287          | 299          | 310          |
|                         |                                                               | 1.2 HP<br>[895] | High Cool -<br>Tap 4*   | CFM           | 2630                                         | 2595         | 2558         | 2526         | 2490         | 2453         | 2422         | 2389         |
|                         |                                                               |                 |                         | WATTS         | 818                                          | 840          | 862          | 884          | 907          | 930          | 952          | 976          |
|                         |                                                               | 1.2 HP<br>[895] | Max Speed -<br>Tap 5    | CFM           | 2700                                         | 2668         | 2635         | 2601         | 2568         | 2536         | 2504         | 2473         |
|                         |                                                               |                 |                         | WATTS         | 888                                          | 910          | 933          | 956          | 980          | 1003         | 1029         | 1055         |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap

Pressure drops across the 3-6T CFM range (1050 - 2700)

Wet coil: ~0.09 Inches W.C.

Downflow: ~0.1 Inches W.C.

Reheat coil: ~0.09 Inches W.C.

[ ] Designates Metric Conversions



### 3-6T — HIGH STATIC — SIDEFLOW (208/230V, 575V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W]  | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |             |              |              |              |
|-------------------------|---------------------------------------------------------------|------------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|
|                         |                                                               |                  |                         |               | 0.8<br>[.2]                                  | 0.9<br>[.22] | 1.0<br>[.25] | 1.1<br>[.27] | 1.2<br>[.3] | 1.3<br>[.32] | 1.4<br>[.35] | 1.5<br>[.37] |
| RACCYB036 (3T)          | 1050/1350                                                     | 1.5 HP<br>[1119] | Fan Only -<br>Tap 1     | CFM           | 959                                          | 888          | 811          | 723          | 647         | 594          | 521          | 472          |
|                         |                                                               |                  |                         | WATTS         | 264                                          | 274          | 283          | 291          | 301         | 301          | 312          | 318          |
|                         |                                                               | 1.5 HP<br>[1119] | Low Heat -<br>Tap 2     | CFM           | 1510                                         | 1449         | 1393         | 1344         | 1293        | 1237         | 1185         | 1133         |
|                         |                                                               |                  |                         | WATTS         | 476                                          | 490          | 504          | 516          | 529         | 538          | 550          | 562          |
|                         |                                                               | 1.5 HP<br>[1119] | High Heat -<br>Tap 3    | CFM           | 1802                                         | 1748         | 1697         | 1644         | 1595        | 1524         | 1482         | 1441         |
|                         |                                                               |                  |                         | WATTS         | 641                                          | 656          | 672          | 688          | 703         | 704          | 719          | 735          |
|                         |                                                               | 1.5 HP<br>[1119] | Rated Cool -<br>Tap 4*  | CFM           | 1510                                         | 1449         | 1393         | 1344         | 1293        | 1237         | 1185         | 1133         |
|                         |                                                               |                  |                         | WATTS         | 476                                          | 490          | 504          | 516          | 529         | 538          | 550          | 562          |
|                         |                                                               | 1.5 HP<br>[1119] | Max Speed -<br>Tap 5    | CFM           | 1826                                         | 1764         | 1713         | 1664         | 1612        | 1565         | 1519         | 1473         |
|                         |                                                               |                  |                         | WATTS         | 652                                          | 669          | 685          | 700          | 716         | 731          | 745          | 760          |
| RACCYB048 (4T)          | 1400/1800                                                     | 1.5 HP<br>[1119] | Fan Only -<br>Tap 1     | CFM           | 1047                                         | 981          | 905          | 827          | 745         | 672          | 610          | 566          |
|                         |                                                               |                  |                         | WATTS         | 299                                          | 310          | 321          | 331          | 340         | 348          | 355          | 361          |
|                         |                                                               | 1.5 HP<br>[1119] | Low Heat -<br>Tap 2     | CFM           | 1757                                         | 1710         | 1645         | 1592         | 1549        | 1512         | 1467         | 1422         |
|                         |                                                               |                  |                         | WATTS         | 611                                          | 628          | 647          | 664          | 680         | 698          | 717          | 734          |
|                         |                                                               | 1.5 HP<br>[1119] | High Heat -<br>Tap 3    | CFM           | 1820                                         | 1775         | 1724         | 1661         | 1614        | 1574         | 1530         | 1484         |
|                         |                                                               |                  |                         | WATTS         | 653                                          | 671          | 688          | 706          | 723         | 739          | 757          | 775          |
|                         |                                                               | 1.5 HP<br>[1119] | Rated Cool -<br>Tap 4*  | CFM           | 1880                                         | 1831         | 1785         | 1720         | 1668        | 1627         | 1586         | 1541         |
|                         |                                                               |                  |                         | WATTS         | 690                                          | 708          | 725          | 745          | 763         | 780          | 797          | 816          |
|                         |                                                               | 1.5 HP<br>[1119] | Max Speed -<br>Tap 5    | CFM           | 2000                                         | 1956         | 1912         | 1868         | 1808        | 1756         | 1721         | 1684         |
|                         |                                                               |                  |                         | WATTS         | 769                                          | 788          | 806          | 826          | 847         | 868          | 887          | 908          |
| RACCYB060 (5T)          | 1750/2250                                                     | 1.5 HP<br>[1119] | Fan Only -<br>Tap 1     | CFM           | 1101                                         | 1048         | 999          | 908          | 844         | 772          | 709          | 650          |
|                         |                                                               |                  |                         | WATTS         | 325                                          | 336          | 350          | 359          | 367         | 376          | 384          | 390          |
|                         |                                                               | 1.5 HP<br>[1119] | Low Heat -<br>Tap 2     | CFM           | 1634                                         | 1592         | 1546         | 1501         | 1458        | 1413         | 1365         | 1323         |
|                         |                                                               |                  |                         | WATTS         | 585                                          | 599          | 615          | 631          | 647         | 663          | 679          | 694          |
|                         |                                                               | 1.5 HP<br>[1119] | High Heat -<br>Tap 3    | CFM           | 1845                                         | 1794         | 1754         | 1711         | 1666        | 1626         | 1585         | 1544         |
|                         |                                                               |                  |                         | WATTS         | 723                                          | 740          | 757          | 775          | 793         | 810          | 826          | 843          |
|                         |                                                               | 1.5 HP<br>[1119] | Rated Cool -<br>Tap 4*  | CFM           | 2271                                         | 2239         | 2203         | 2149         | 2109        | 2066         | 2036         | 1999         |
|                         |                                                               |                  |                         | WATTS         | 1100                                         | 1118         | 1138         | 1165         | 1187        | 1210         | 1230         | 1251         |
|                         |                                                               | 1.5 HP<br>[1119] | Max Speed -<br>Tap 5    | CFM           | 2155                                         | 2116         | 2064         | 2017         | 1979        | 1944         | 1909         | 1871         |
|                         |                                                               |                  |                         | WATTS         | 971                                          | 991          | 1014         | 1036         | 1056        | 1077         | 1097         | 1118         |
| RACCYB072 (6T)          | 2100/2700                                                     | 1.2 HP<br>[895]  | Fan/Low Heat -<br>Tap 1 | CFM           | 1336                                         | 1286         | 1234         | 1183         | 1130        | 1074         | 998          | 930          |
|                         |                                                               |                  |                         | WATTS         | 379                                          | 392          | 404          | 416          | 427         | 439          | 450          | 460          |
|                         |                                                               | 1.2 HP<br>[895]  | High Heat -<br>Tap 2    | CFM           | 1961                                         | 1920         | 1874         | 1821         | 1767        | 1719         | 1680         | 1647         |
|                         |                                                               |                  |                         | WATTS         | 668                                          | 686          | 708          | 732          | 754         | 777          | 796          | 817          |
|                         |                                                               | 1.2 HP<br>[895]  | Low Cool -<br>Tap 3     | CFM           | 1616                                         | 1540         | 1494         | 1449         | 1405        | 1362         | 1315         | 1271         |
|                         |                                                               |                  |                         | WATTS         | 487                                          | 505          | 521          | 537          | 552         | 566          | 581          | 594          |
|                         |                                                               | 1.2 HP<br>[895]  | High Cool -<br>Tap 4*   | CFM           | 2461                                         | 2428         | 2400         | 2366         | 2336        | 2314         | 2285         | 2224         |
|                         |                                                               |                  |                         | WATTS         | 1055                                         | 1081         | 1110         | 1144         | 1177        | 1212         | 1240         | 1246         |
|                         |                                                               | 1.2 HP<br>[895]  | Max Speed -<br>Tap 5    | CFM           | 2461                                         | 2428         | 2400         | 2366         | 2336        | 2314         | 2285         | 2224         |
|                         |                                                               |                  |                         | WATTS         | 1055                                         | 1081         | 1110         | 1144         | 1177        | 1212         | 1240         | 1246         |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap

Pressure drops across the 3-6T CFM range (1050 - 2700)

Wet coil: ~0.09 Inches W.C.

Downflow: ~0.1 Inches W.C.

Reheat coil: ~0.09 Inches W.C.

[ ] Designates Metric Conversions



### 3-6T—LOW STATIC—SIDEFLOW (460V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W] | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |              |              |              |              |
|-------------------------|---------------------------------------------------------------|-----------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                         |                                                               |                 |                         |               | 0.1<br>[.02]                                 | 0.2<br>[.05] | 0.3<br>[.07] | 0.4<br>[.10] | 0.5<br>[.12] | 0.6<br>[.15] | 0.7<br>[.17] | 0.8<br>[.20] |
| RACCYB036 (3T)          | 1050/1350                                                     | 3/4 HP<br>[559] | Fan Only -<br>Tap 1     | CFM           | 1002                                         | 888          | 797          | 704          | 612          | 510          | 392          | 322          |
|                         |                                                               |                 |                         | WATTS         | 108                                          | 117          | 124          | 132          | 139          | 145          | 153          | 157          |
|                         |                                                               | 3/4 HP<br>[559] | Low Heat -<br>Tap 2     | CFM           | 1220                                         | 1138         | 1048         | 970          | 896          | 812          | 727          | 644          |
|                         |                                                               |                 |                         | WATTS         | 157                                          | 166          | 176          | 186          | 194          | 205          | 214          | 222          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 3    | CFM           | 1804                                         | 1736         | 1670         | 1606         | 1546         | 1481         | 1424         | 1370         |
|                         |                                                               |                 |                         | WATTS         | 357                                          | 373          | 388          | 403          | 416          | 431          | 445          | 459          |
|                         |                                                               | 3/4 HP<br>[559] | Rated Cool -<br>Tap 4*  | CFM           | 1548                                         | 1476         | 1407         | 1327         | 1258         | 1190         | 1125         | 1064         |
|                         |                                                               |                 |                         | WATTS         | 255                                          | 267          | 279          | 292          | 303          | 316          | 327          | 338          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 1818                                         | 1748         | 1681         | 1619         | 1557         | 1495         | 1432         | 1379         |
|                         |                                                               |                 |                         | WATTS         | 366                                          | 383          | 398          | 412          | 427          | 440          | 454          | 468          |
| RACCYB048 (4T)          | 1400/1800                                                     | 3/4 HP<br>[559] | Fan Only -<br>Tap 1     | CFM           | 1121                                         | 1037         | 930          | 853          | 777          | 672          | 567          | 485          |
|                         |                                                               |                 |                         | WATTS         | 100                                          | 110          | 121          | 130          | 139          | 148          | 155          | 161          |
|                         |                                                               | 3/4 HP<br>[559] | Low Heat -<br>Tap 2     | CFM           | 1424                                         | 1349         | 1281         | 1211         | 1115         | 1055         | 996          | 927          |
|                         |                                                               |                 |                         | WATTS         | 173                                          | 186          | 198          | 210          | 224          | 234          | 244          | 255          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 3    | CFM           | 1859                                         | 1804         | 1750         | 1692         | 1639         | 1587         | 1527         | 1450         |
|                         |                                                               |                 |                         | WATTS         | 344                                          | 360          | 376          | 393          | 408          | 423          | 441          | 458          |
|                         |                                                               | 3/4 HP<br>[559] | Rated Cool -<br>Tap 4*  | CFM           | 1907                                         | 1855         | 1798         | 1742         | 1686         | 1633         | 1578         | 1495         |
|                         |                                                               |                 |                         | WATTS         | 368                                          | 386          | 402          | 418          | 434          | 449          | 464          | 482          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 2023                                         | 1973         | 1922         | 1868         | 1818         | 1767         | 1717         | 1666         |
|                         |                                                               |                 |                         | WATTS         | 436                                          | 453          | 470          | 488          | 505          | 522          | 539          | 557          |
| RACCYB060 (5T)          | 1750/2250                                                     | 1 HP<br>[745]   | Fan Only -<br>Tap 1     | CFM           | 1124                                         | 1043         | 949          | 872          | 793          | 698          | 607          | 508          |
|                         |                                                               |                 |                         | WATTS         | 114                                          | 124          | 133          | 142          | 149          | 159          | 166          | 174          |
|                         |                                                               | 1 HP<br>[745]   | Low Heat -<br>Tap 2     | CFM           | 1280                                         | 1202         | 1121         | 1046         | 968          | 895          | 816          | 732          |
|                         |                                                               |                 |                         | WATTS         | 150                                          | 160          | 172          | 182          | 192          | 201          | 213          | 221          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 3    | CFM           | 1878                                         | 1822         | 1771         | 1722         | 1668         | 1610         | 1551         | 1502         |
|                         |                                                               |                 |                         | WATTS         | 395                                          | 412          | 428          | 443          | 458          | 475          | 491          | 505          |
|                         |                                                               | 1 HP<br>[745]   | Rated Cool -<br>Tap 4*  | CFM           | 2160                                         | 2109         | 2065         | 2017         | 1974         | 1931         | 1883         | 1829         |
|                         |                                                               |                 |                         | WATTS         | 585                                          | 605          | 623          | 642          | 659          | 676          | 694          | 714          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 2288                                         | 2243         | 2191         | 2146         | 2105         | 2061         | 2024         | 1979         |
|                         |                                                               |                 |                         | WATTS         | 681                                          | 702          | 725          | 745          | 764          | 783          | 801          | 820          |
| RACCYB072 (6T)          | 2100/2700                                                     | 1.2 HP<br>[895] | Fan/Low Heat -<br>Tap 1 | CFM           | 1425                                         | 1353         | 1271         | 1188         | 1115         | 1057         | 990          | 912          |
|                         |                                                               |                 |                         | WATTS         | 167                                          | 178          | 190          | 202          | 211          | 222          | 231          | 241          |
|                         |                                                               | 1.2 HP<br>[895] | High Heat -<br>Tap 2    | CFM           | 1994                                         | 1944         | 1884         | 1830         | 1772         | 1717         | 1652         | 1591         |
|                         |                                                               |                 |                         | WATTS         | 387                                          | 401          | 414          | 427          | 442          | 458          | 472          | 485          |
|                         |                                                               | 1.2 HP<br>[895] | Low Cool -<br>Tap 3     | CFM           | 1621                                         | 1557         | 1499         | 1430         | 1353         | 1286         | 1227         | 1179         |
|                         |                                                               |                 |                         | WATTS         | 228                                          | 241          | 254          | 268          | 280          | 290          | 302          | 316          |
|                         |                                                               | 1.2 HP<br>[895] | High Cool -<br>Tap 4*   | CFM           | 2700                                         | 2665         | 2627         | 2588         | 2549         | 2515         | 2471         | 2425         |
|                         |                                                               |                 |                         | WATTS         | 861                                          | 880          | 901          | 922          | 940          | 964          | 984          | 1004         |
|                         |                                                               | 1.2 HP<br>[895] | Max Speed -<br>Tap 5    | CFM           | 2776                                         | 2736         | 2701         | 2659         | 2620         | 2581         | 2544         | 2498         |
|                         |                                                               |                 |                         | WATTS         | 928                                          | 950          | 969          | 989          | 1005         | 1028         | 1049         | 1069         |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap  
Pressure drops across the 3-6T CFM range (1050 - 2700)  
Wet coil: ~0.09 Inches W.C.  
Downflow: ~0.1 Inches W.C.  
Reheat coil: ~0.09 Inches W.C.

[ ] Designates Metric Conversions

### 3-6T – HIGH STATIC – SIDEFLOW (460V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W] | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |             |              |              |              |
|-------------------------|---------------------------------------------------------------|-----------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|
|                         |                                                               |                 |                         |               | 0.8<br>[.2]                                  | 0.9<br>[.22] | 1.0<br>[.25] | 1.1<br>[.27] | 1.2<br>[.3] | 1.3<br>[.32] | 1.4<br>[.35] | 1.5<br>[.37] |
| RACCYB036 (3T)          | 1050/1350                                                     | 1 HP<br>[745]   | Fan Only -<br>Tap 1     | CFM           | 892                                          | 829          | 748          | 681          | 620         | 573          | 512          | 462          |
|                         |                                                               |                 |                         | WATTS         | 282                                          | 290          | 299          | 307          | 316         | 323          | 332          | 340          |
|                         |                                                               | 1 HP<br>[745]   | Low Heat -<br>Tap 2     | CFM           | 1149                                         | 1091         | 1032         | 970          | 907         | 841          | 773          | 724          |
|                         |                                                               |                 |                         | WATTS         | 367                                          | 379          | 390          | 400          | 410         | 419          | 431          | 438          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 3    | CFM           | 1751                                         | 1697         | 1649         | 1590         | 1541        | 1489         | 1443         | 1406         |
|                         |                                                               |                 |                         | WATTS         | 672                                          | 690          | 704          | 720          | 735         | 750          | 766          | 779          |
|                         |                                                               | 1 HP<br>[745]   | Rated Cool -<br>Tap 4*  | CFM           | 1493                                         | 1440         | 1357         | 1312         | 1258        | 1213         | 1162         | 1105         |
|                         |                                                               |                 |                         | WATTS         | 523                                          | 539          | 542          | 553          | 568         | 581          | 593          | 606          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 1768                                         | 1703         | 1658         | 1597         | 1554        | 1504         | 1454         | 1413         |
|                         |                                                               |                 |                         | WATTS         | 682                                          | 702          | 714          | 732          | 746         | 760          | 777          | 791          |
| RACCYB048 (4T)          | 1400/1800                                                     | 1 HP<br>[745]   | Fan Only -<br>Tap 1     | CFM           | 1044                                         | 986          | 928          | 842          | 763         | 696          | 646          | 594          |
|                         |                                                               |                 |                         | WATTS         | 292                                          | 302          | 312          | 324          | 332         | 340          | 346          | 353          |
|                         |                                                               | 1 HP<br>[745]   | Low Heat -<br>Tap 2     | CFM           | 1307                                         | 1255         | 1203         | 1153         | 1101        | 1047         | 973          | 913          |
|                         |                                                               |                 |                         | WATTS         | 395                                          | 408          | 419          | 431          | 442         | 453          | 466          | 479          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 3    | CFM           | 1863                                         | 1753         | 1701         | 1666         | 1629        | 1594         | 1555         | 1514         |
|                         |                                                               |                 |                         | WATTS         | 670                                          | 693          | 712          | 726          | 742         | 758          | 774          | 790          |
|                         |                                                               | 1 HP<br>[745]   | Rated Cool -<br>Tap 4*  | CFM           | 1908                                         | 1848         | 1774         | 1724         | 1682        | 1640         | 1598         | 1545         |
|                         |                                                               |                 |                         | WATTS         | 701                                          | 722          | 743          | 758          | 774         | 790          | 807          | 812          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 2028                                         | 1984         | 1915         | 1851         | 1806        | 1764         | 1724         | 1509         |
|                         |                                                               |                 |                         | WATTS         | 787                                          | 805          | 830          | 850          | 867         | 884          | 902          | 782          |
| RACCYB060 (5T)          | 1750/2250                                                     | 1.2 HP<br>[895] | Fan Only -<br>Tap 1     | CFM           | 956                                          | 892          | 834          | 771          | 698         | 645          | 570          | 523          |
|                         |                                                               |                 |                         | WATTS         | 335                                          | 342          | 351          | 354          | 362         | 370          | 377          | 385          |
|                         |                                                               | 1.2 HP<br>[895] | Low Heat -<br>Tap 2     | CFM           | 1209                                         | 1150         | 1078         | 1015         | 967         | 910          | 855          | 795          |
|                         |                                                               |                 |                         | WATTS         | 445                                          | 458          | 464          | 472          | 484         | 496          | 503          | 506          |
|                         |                                                               | 1.2 HP<br>[895] | High Heat -<br>Tap 3    | CFM           | 1795                                         | 1745         | 1699         | 1652         | 1612        | 1564         | 1522         | 1478         |
|                         |                                                               |                 |                         | WATTS         | 841                                          | 859          | 874          | 886          | 905         | 915          | 928          | 942          |
|                         |                                                               | 1.2 HP<br>[895] | Rated Cool -<br>Tap 4*  | CFM           | 2084                                         | 2048         | 2003         | 1960         | 1922        | 1874         | 1823         | 1777         |
|                         |                                                               |                 |                         | WATTS         | 1151                                         | 1170         | 1188         | 1204         | 1219        | 1232         | 1242         | 1255         |
|                         |                                                               | 1.2 HP<br>[895] | Max Speed -<br>Tap 5    | CFM           | 2161                                         | 2093         | 2047         | 1991         | 1942        | 1881         | 1830         | 1767         |
|                         |                                                               |                 |                         | WATTS         | 1243                                         | 1243         | 1244         | 1244         | 1243        | 1245         | 1242         | 1243         |
| RACCYB072 (6T)          | 2100/2700                                                     | 1.2 HP<br>[895] | Fan/Low Heat -<br>Tap 1 | CFM           | 1337                                         | 1287         | 1237         | 1178         | 1112        | 1037         | 963          | 879          |
|                         |                                                               |                 |                         | WATTS         | 379                                          | 390          | 403          | 414          | 423         | 434          | 446          | 456          |
|                         |                                                               | 1.2 HP<br>[895] | High Heat -<br>Tap 2    | CFM           | 1999                                         | 1946         | 1889         | 1834         | 1786        | 1741         | 1696         | 1655         |
|                         |                                                               |                 |                         | WATTS         | 703                                          | 721          | 735          | 751          | 766         | 783          | 798          | 812          |
|                         |                                                               | 1.2 HP<br>[895] | Low Cool -<br>Tap 3     | CFM           | 1576                                         | 1523         | 1472         | 1423         | 1369        | 1312         | 1256         | 1195         |
|                         |                                                               |                 |                         | WATTS         | 482                                          | 495          | 508          | 519          | 530         | 540          | 551          | 565          |
|                         |                                                               | 1.2 HP<br>[895] | High Cool -<br>Tap 4*   | CFM           | 2585                                         | 2542         | 2505         | 2448         | 2405        | 2338         | 2266         | 2195         |
|                         |                                                               |                 |                         | WATTS         | 1154                                         | 1174         | 1203         | 1217         | 1238        | 1239         | 1238         | 1234         |
|                         |                                                               | 1.2 HP<br>[895] | Max Speed -<br>Tap 5    | CFM           | 2585                                         | 2542         | 2505         | 2448         | 2405        | 2338         | 2266         | 2195         |
|                         |                                                               |                 |                         | WATTS         | 1154                                         | 1174         | 1203         | 1217         | 1238        | 1239         | 1238         | 1234         |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap  
Pressure drops across the 3-6T CFM range (1050 - 2700)  
Wet coil: ~0.09 Inches W.C.  
Downflow: ~0.1 Inches W.C.  
Reheat coil: ~0.09 Inches W.C.

[ ] Designates Metric Conversions

### 3-5T—LOW STATIC—SIDEFLOW (208/230V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W] | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |              |              |              |              |
|-------------------------|---------------------------------------------------------------|-----------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                         |                                                               |                 |                         |               | 0.1<br>[.02]                                 | 0.2<br>[.05] | 0.3<br>[.07] | 0.4<br>[.10] | 0.5<br>[.12] | 0.6<br>[.15] | 0.7<br>[.17] | 0.8<br>[.20] |
| RACCYC036 (3T)          | 1050/1350                                                     | 3/4 HP<br>[559] | Fan/Low<br>Heat - Tap 1 | CFM           | 1603                                         | 1523         | 1448         | 1382         | 1300         | 1241         | 1174         | 1116         |
|                         |                                                               |                 |                         | WATTS         | 233                                          | 246          | 260          | 272          | 285          | 297          | 309          | 320          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 2    | CFM           | 1856                                         | 1792         | 1703         | 1646         | 1589         | 1511         | 1459         | 1399         |
|                         |                                                               |                 |                         | WATTS         | 338                                          | 354          | 367          | 380          | 395          | 412          | 424          | 440          |
|                         |                                                               | 3/4 HP<br>[559] | Low Cool -<br>Tap 3     | CFM           | 1332                                         | 1042         | 774          | 691          | 590          | 495          | 430          | 351          |
|                         |                                                               |                 |                         | WATTS         | 154                                          | 118          | 97           | 104          | 111          | 117          | 123          | 129          |
|                         |                                                               | 3/4 HP<br>[559] | High Cool -<br>Tap 4*   | CFM           | 1448                                         | 1368         | 1292         | 1203         | 1135         | 1059         | 999          | 930          |
|                         |                                                               |                 |                         | WATTS         | 186                                          | 197          | 209          | 222          | 233          | 241          | 251          | 262          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 1865                                         | 1797         | 1735         | 1670         | 1604         | 1537         | 1471         | 1422         |
|                         |                                                               |                 |                         | WATTS         | 348                                          | 363          | 377          | 392          | 409          | 425          | 441          | 453          |
| RACCYC048 (4T)          | 1400/1800                                                     | 3/4 HP<br>[559] | Fan/Low<br>Heat - Tap 1 | CFM           | 1785                                         | 1727         | 1662         | 1606         | 1554         | 1475         | 1415         | 1368         |
|                         |                                                               |                 |                         | WATTS         | 319                                          | 336          | 354          | 369          | 383          | 402          | 419          | 434          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 2    | CFM           | 1851                                         | 1794         | 1733         | 1677         | 1626         | 1569         | 1484         | 1429         |
|                         |                                                               |                 |                         | WATTS         | 352                                          | 370          | 388          | 404          | 418          | 433          | 452          | 468          |
|                         |                                                               | 3/4 HP<br>[559] | Low Cool -<br>Tap 3     | CFM           | 1087                                         | 873          | 799          | 709          | 598          | 519          | 445          | 372          |
|                         |                                                               |                 |                         | WATTS         | 118                                          | 103          | 109          | 117          | 122          | 130          | 134          | 140          |
|                         |                                                               | 3/4 HP<br>[559] | High Cool -<br>Tap 4*   | CFM           | 1734                                         | 1675         | 1624         | 1574         | 1515         | 1465         | 1412         | 1359         |
|                         |                                                               |                 |                         | WATTS         | 376                                          | 390          | 402          | 415          | 428          | 441          | 451          | 461          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 2035                                         | 1985         | 1928         | 1872         | 1824         | 1777         | 1730         | 1652         |
|                         |                                                               |                 |                         | WATTS         | 450                                          | 468          | 488          | 509          | 526          | 543          | 560          | 583          |
| RACCYC060 (5T)          | 1750/2250                                                     | 1 HP<br>[745]   | Fan/Low<br>Heat - Tap 1 | CFM           | 1685                                         | 1621         | 1562         | 1514         | 1459         | 1372         | 1310         | 1257         |
|                         |                                                               |                 |                         | WATTS         | 288                                          | 303          | 318          | 332          | 347          | 364          | 377          | 391          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 2    | CFM           | 1887                                         | 1829         | 1781         | 1731         | 1678         | 1636         | 1564         | 1495         |
|                         |                                                               |                 |                         | WATTS         | 390                                          | 407          | 423          | 439          | 456          | 471          | 491          | 508          |
|                         |                                                               | 1 HP<br>[745]   | Low Cool -<br>Tap 3     | CFM           | 1397                                         | 1324         | 1266         | 1179         | 1107         | 1043         | 981          | 913          |
|                         |                                                               |                 |                         | WATTS         | 183                                          | 196          | 207          | 221          | 232          | 243          | 254          | 265          |
|                         |                                                               | 1 HP<br>[745]   | High Cool -<br>Tap 4*   | CFM           | 2179                                         | 2136         | 2087         | 2035         | 1989         | 1955         | 1912         | 1868         |
|                         |                                                               |                 |                         | WATTS         | 580                                          | 598          | 618          | 638          | 657          | 674          | 692          | 711          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 2296                                         | 2244         | 2207         | 2152         | 2115         | 2066         | 2034         | 1987         |
|                         |                                                               |                 |                         | WATTS         | 668                                          | 689          | 709          | 730          | 750          | 771          | 789          | 811          |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap

Pressure drops across the 3-5T CFM range (1050 - 2250)

Wet coil: ~0.09 Inches W.C.

Downflow: ~0.1 Inches W.C.

Reheat coil: ~0.09 Inches W.C.

FER testing - 3 ton model, 100K heating input, use Tap 3 as Q max

[ ] Designates Metric Conversions

### 3-5T — HIGH STATIC — SIDEFLOW (208/230V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W]  | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |             |              |              |              |
|-------------------------|---------------------------------------------------------------|------------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|
|                         |                                                               |                  |                         |               | 0.8<br>[.2]                                  | 0.9<br>[.22] | 1.0<br>[.25] | 1.1<br>[.27] | 1.2<br>[.3] | 1.3<br>[.32] | 1.4<br>[.35] | 1.5<br>[.37] |
| RACCYC036 (3T)          | 1050/1350                                                     | 1.5 HP<br>[1119] | Fan/Low<br>Heat - Tap 1 | CFM           | 1510                                         | 1449         | 1393         | 1344         | 1293        | 1237         | 1185         | 1133         |
|                         |                                                               |                  |                         | WATTS         | 476                                          | 490          | 504          | 516          | 529         | 538          | 550          | 562          |
|                         |                                                               | 1.5 HP<br>[1119] | High Heat -<br>Tap 2    | CFM           | 1802                                         | 1748         | 1697         | 1644         | 1595        | 1524         | 1482         | 1441         |
|                         |                                                               |                  |                         | WATTS         | 641                                          | 656          | 672          | 688          | 703         | 704          | 719          | 735          |
|                         |                                                               | 1.5 HP<br>[1119] | Low Cool -<br>Tap 3     | CFM           | 922                                          | 850          | 785          | 715          | 642         | 600          | 543          | 483          |
|                         |                                                               |                  |                         | WATTS         | 254                                          | 263          | 277          | 284          | 293         | 299          | 307          | 316          |
|                         |                                                               | 1.5 HP<br>[1119] | High Cool -<br>Tap 4*   | CFM           | 1351                                         | 1292         | 1241         | 1191         | 1142        | 1091         | 1033         | 960          |
|                         |                                                               |                  |                         | WATTS         | 403                                          | 417          | 428          | 441          | 453         | 472          | 483          | 495          |
|                         |                                                               | 1.5 HP<br>[1119] | Max Speed -<br>Tap 5    | CFM           | 1826                                         | 1764         | 1713         | 1664         | 1612        | 1565         | 1519         | 1473         |
|                         |                                                               |                  |                         | WATTS         | 652                                          | 669          | 685          | 700          | 716         | 731          | 745          | 760          |
| RACCYC048 (4T)          | 1400/1800                                                     | 1 HP<br>[745]    | Fan/Low<br>Heat - Tap 1 | CFM           | 1757                                         | 1710         | 1645         | 1592         | 1549        | 1512         | 1467         | 1422         |
|                         |                                                               |                  |                         | WATTS         | 611                                          | 628          | 647          | 664          | 680         | 698          | 717          | 734          |
|                         |                                                               | 1 HP<br>[745]    | High Heat -<br>Tap 2    | CFM           | 1820                                         | 1775         | 1724         | 1661         | 1614        | 1574         | 1530         | 1484         |
|                         |                                                               |                  |                         | WATTS         | 653                                          | 671          | 688          | 706          | 723         | 739          | 757          | 775          |
|                         |                                                               | 1 HP<br>[745]    | Low Cool -<br>Tap 3     | CFM           | 955                                          | 885          | 808          | 727          | 652         | 596          | 550          | 507          |
|                         |                                                               |                  |                         | WATTS         | 272                                          | 282          | 292          | 301          | 308         | 316          | 323          | 331          |
|                         |                                                               | 1 HP<br>[745]    | High Cool -<br>Tap 4*   | CFM           | 1708                                         | 1656         | 1591         | 1544         | 1507        | 1463         | 1415         | 1372         |
|                         |                                                               |                  |                         | WATTS         | 581                                          | 598          | 615          | 632          | 649         | 668          | 686          | 703          |
|                         |                                                               | 1 HP<br>[745]    | Max Speed -<br>Tap 5    | CFM           | 2000                                         | 1956         | 1912         | 1868         | 1808        | 1756         | 1721         | 1684         |
|                         |                                                               |                  |                         | WATTS         | 769                                          | 788          | 806          | 826          | 847         | 868          | 887          | 908          |
| RACCYC060 (5T)          | 1750/2250                                                     | 1.2 HP<br>[895]  | Fan/Low<br>Heat - Tap 1 | CFM           | 1634                                         | 1592         | 1546         | 1501         | 1458        | 1413         | 1365         | 1323         |
|                         |                                                               |                  |                         | WATTS         | 585                                          | 599          | 615          | 631          | 647         | 663          | 679          | 694          |
|                         |                                                               | 1.2 HP<br>[895]  | High Heat -<br>Tap 2    | CFM           | 1845                                         | 1794         | 1754         | 1711         | 1666        | 1626         | 1585         | 1544         |
|                         |                                                               |                  |                         | WATTS         | 723                                          | 740          | 757          | 775          | 793         | 810          | 826          | 843          |
|                         |                                                               | 1.2 HP<br>[895]  | Low Cool -<br>Tap 3     | CFM           | 1385                                         | 1333         | 1281         | 1228         | 1177        | 1127         | 1074         | 995          |
|                         |                                                               |                  |                         | WATTS         | 448                                          | 462          | 475          | 489          | 502         | 514          | 526          | 541          |
|                         |                                                               | 1.2 HP<br>[895]  | High Cool -<br>Tap 4*   | CFM           | 2271                                         | 2239         | 2203         | 2149         | 2109        | 2066         | 2036         | 1999         |
|                         |                                                               |                  |                         | WATTS         | 1100                                         | 1118         | 1138         | 1165         | 1187        | 1210         | 1230         | 1251         |
|                         |                                                               | 1.2 HP<br>[895]  | Max Speed -<br>Tap 5    | CFM           | 2155                                         | 2116         | 2064         | 2017         | 1979        | 1944         | 1909         | 1871         |
|                         |                                                               |                  |                         | WATTS         | 971                                          | 991          | 1014         | 1036         | 1056        | 1077         | 1097         | 1118         |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap

Pressure drops across the 3-5T CFM range (1050 - 2250)

Wet coil: ~0.09 Inches W.C.

Downflow: ~0.1 Inches W.C.

Reheat coil: ~0.09 Inches W.C.

FER testing - 3 ton model, 100K heating input, use Tap 3 as Q max

[ ] Designates Metric Conversions

### 3-5T—LOW STATIC—SIDEFLOW (460V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W] | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |              |              |              |              |
|-------------------------|---------------------------------------------------------------|-----------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                         |                                                               |                 |                         |               | 0.1<br>[.02]                                 | 0.2<br>[.05] | 0.3<br>[.07] | 0.4<br>[.10] | 0.5<br>[.12] | 0.6<br>[.15] | 0.7<br>[.17] | 0.8<br>[.20] |
| RACCYC036 (3T)          | 1050/1350                                                     | 3/4 HP<br>[559] | Fan/Low<br>Heat - Tap 1 | CFM           | 1220                                         | 1138         | 1048         | 970          | 896          | 812          | 727          | 644          |
|                         |                                                               |                 |                         | WATTS         | 157                                          | 166          | 176          | 186          | 194          | 205          | 214          | 222          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 2    | CFM           | 1804                                         | 1736         | 1670         | 1606         | 1546         | 1481         | 1424         | 1370         |
|                         |                                                               |                 |                         | WATTS         | 357                                          | 373          | 388          | 403          | 416          | 431          | 445          | 459          |
|                         |                                                               | 3/4 HP<br>[559] | Low Cool -<br>Tap 3     | CFM           | 942                                          | 834          | 741          | 627          | 539          | 448          | 364          | 273          |
|                         |                                                               |                 |                         | WATTS         | 102                                          | 111          | 118          | 127          | 132          | 138          | 143          | 148          |
|                         |                                                               | 3/4 HP<br>[559] | High Cool -<br>Tap 4*   | CFM           | 1394                                         | 1326         | 1237         | 1163         | 1091         | 1020         | 953          | 878          |
|                         |                                                               |                 |                         | WATTS         | 206                                          | 217          | 230          | 240          | 250          | 262          | 272          | 283          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 1818                                         | 1748         | 1681         | 1619         | 1557         | 1495         | 1432         | 1379         |
|                         |                                                               |                 |                         | WATTS         | 366                                          | 383          | 398          | 412          | 427          | 440          | 454          | 468          |
| RACCYC048 (4T)          | 1400/1800                                                     | 3/4 HP<br>[559] | Fan/Low<br>Heat - Tap 1 | CFM           | 1424                                         | 1349         | 1281         | 1211         | 1115         | 1055         | 996          | 927          |
|                         |                                                               |                 |                         | WATTS         | 173                                          | 186          | 198          | 210          | 224          | 234          | 244          | 255          |
|                         |                                                               | 3/4 HP<br>[559] | High Heat -<br>Tap 2    | CFM           | 1859                                         | 1804         | 1750         | 1692         | 1639         | 1587         | 1527         | 1450         |
|                         |                                                               |                 |                         | WATTS         | 344                                          | 360          | 376          | 393          | 408          | 423          | 441          | 458          |
|                         |                                                               | 3/4 HP<br>[559] | Low Cool -<br>Tap 3     | CFM           | 958                                          | 871          | 785          | 703          | 583          | 509          | 440          | 370          |
|                         |                                                               |                 |                         | WATTS         | 91                                           | 99           | 106          | 113          | 120          | 126          | 132          | 137          |
|                         |                                                               | 3/4 HP<br>[559] | High Cool -<br>Tap 4*   | CFM           | 1720                                         | 1664         | 1609         | 1560         | 1511         | 1463         | 1404         | 1351         |
|                         |                                                               |                 |                         | WATTS         | 363                                          | 375          | 388          | 400          | 414          | 425          | 440          | 454          |
|                         |                                                               | 3/4 HP<br>[559] | Max Speed -<br>Tap 5    | CFM           | 2023                                         | 1973         | 1922         | 1868         | 1818         | 1767         | 1717         | 1666         |
|                         |                                                               |                 |                         | WATTS         | 436                                          | 453          | 470          | 488          | 505          | 522          | 539          | 557          |
| RACCYC060 (5T)          | 1750/2250                                                     | 1 HP<br>[745]   | Fan/Low<br>Heat - Tap 1 | CFM           | 1280                                         | 1202         | 1121         | 1046         | 968          | 895          | 816          | 732          |
|                         |                                                               |                 |                         | WATTS         | 150                                          | 160          | 172          | 182          | 192          | 201          | 213          | 221          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 2    | CFM           | 1878                                         | 1822         | 1771         | 1722         | 1668         | 1610         | 1551         | 1502         |
|                         |                                                               |                 |                         | WATTS         | 395                                          | 412          | 428          | 443          | 458          | 475          | 491          | 505          |
|                         |                                                               | 1 HP<br>[745]   | Low Cool -<br>Tap 3     | CFM           | 1349                                         | 1290         | 1209         | 1131         | 1061         | 986          | 921          | 837          |
|                         |                                                               |                 |                         | WATTS         | 173                                          | 184          | 196          | 207          | 217          | 227          | 237          | 249          |
|                         |                                                               | 1 HP<br>[745]   | High Cool -<br>Tap 4*   | CFM           | 2160                                         | 2109         | 2065         | 2017         | 1974         | 1931         | 1883         | 1829         |
|                         |                                                               |                 |                         | WATTS         | 585                                          | 605          | 623          | 642          | 659          | 676          | 694          | 714          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 2288                                         | 2243         | 2191         | 2146         | 2105         | 2061         | 2024         | 1979         |
|                         |                                                               |                 |                         | WATTS         | 681                                          | 702          | 725          | 745          | 764          | 783          | 801          | 820          |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap

Pressure drops across the 3-5T CFM range (1050 - 2250)

Wet coil: ~0.09 Inches W.C.

Downflow: ~0.1 Inches W.C.

Reheat coil: ~0.09 Inches W.C.

[ ] Designates Metric Conversions

### 3-5T — HIGH STATIC — SIDEFLOW (460V)

| Unit Model<br>(Tonnage) | Manufacturer<br>Recommended<br>Airflow Range<br>(Min/Max) CFM | Motor<br>HP [W] | Motor Speed             | CFM/<br>WATTS | External Static Pressure - Inches W.C. [kPa] |              |              |              |             |              |              |              |
|-------------------------|---------------------------------------------------------------|-----------------|-------------------------|---------------|----------------------------------------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|
|                         |                                                               |                 |                         |               | 0.8<br>[.2]                                  | 0.9<br>[.22] | 1.0<br>[.25] | 1.1<br>[.27] | 1.2<br>[.3] | 1.3<br>[.32] | 1.4<br>[.35] | 1.5<br>[.37] |
| RACCYC036 (3T)          | 1050/1350                                                     | 1 HP<br>[745]   | Fan/Low<br>Heat - Tap 1 | CFM           | 1149                                         | 1091         | 1032         | 970          | 907         | 841          | 773          | 724          |
|                         |                                                               |                 |                         | WATTS         | 367                                          | 379          | 390          | 400          | 410         | 419          | 431          | 438          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 2    | CFM           | 1751                                         | 1697         | 1649         | 1590         | 1541        | 1489         | 1443         | 1406         |
|                         |                                                               |                 |                         | WATTS         | 672                                          | 690          | 704          | 720          | 735         | 750          | 766          | 779          |
|                         |                                                               | 1 HP<br>[745]   | Low Cool -<br>Tap 3     | CFM           | 894                                          | 828          | 752          | 672          | 618         | 564          | 498          | 441          |
|                         |                                                               |                 |                         | WATTS         | 283                                          | 292          | 300          | 310          | 317         | 325          | 333          | 339          |
|                         |                                                               | 1 HP<br>[745]   | High Cool -<br>Tap 4*   | CFM           | 1333                                         | 1257         | 1199         | 1147         | 1092        | 1040         | 980          | 909          |
|                         |                                                               |                 |                         | WATTS         | 445                                          | 452          | 465          | 477          | 488         | 500          | 510          | 522          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 1768                                         | 1703         | 1658         | 1597         | 1554        | 1504         | 1454         | 1413         |
|                         |                                                               |                 |                         | WATTS         | 682                                          | 702          | 714          | 732          | 746         | 760          | 777          | 791          |
| RACCYC048 (4T)          | 1400/1800                                                     | 1 HP<br>[745]   | Fan/Low<br>Heat - Tap 1 | CFM           | 1307                                         | 1255         | 1203         | 1153         | 1101        | 1047         | 973          | 913          |
|                         |                                                               |                 |                         | WATTS         | 395                                          | 408          | 419          | 431          | 442         | 453          | 466          | 479          |
|                         |                                                               | 1 HP<br>[745]   | High Heat -<br>Tap 2    | CFM           | 1863                                         | 1753         | 1701         | 1666         | 1629        | 1594         | 1555         | 1514         |
|                         |                                                               |                 |                         | WATTS         | 670                                          | 693          | 712          | 726          | 742         | 758          | 774          | 790          |
|                         |                                                               | 1 HP<br>[745]   | Low Cool -<br>Tap 3     | CFM           | 952                                          | 895          | 808          | 724          | 654         | 598          | 551          | 496          |
|                         |                                                               |                 |                         | WATTS         | 264                                          | 273          | 284          | 292          | 298         | 305          | 311          | 316          |
|                         |                                                               | 1 HP<br>[745]   | High Cool -<br>Tap 4*   | CFM           | 1710                                         | 1652         | 1612         | 1571         | 1526        | 1487         | 1445         | 1403         |
|                         |                                                               |                 |                         | WATTS         | 604                                          | 622          | 637          | 652          | 668         | 683          | 698          | 713          |
|                         |                                                               | 1 HP<br>[745]   | Max Speed -<br>Tap 5    | CFM           | 2028                                         | 1984         | 1915         | 1851         | 1806        | 1764         | 1724         | 1509         |
|                         |                                                               |                 |                         | WATTS         | 787                                          | 805          | 830          | 850          | 867         | 884          | 902          | 782          |
| RACCYC060 (5T)          | 1750/2250                                                     | 1.2 HP<br>[895] | Fan/Low<br>Heat - Tap 1 | CFM           | 1209                                         | 1150         | 1078         | 1015         | 967         | 910          | 855          | 795          |
|                         |                                                               |                 |                         | WATTS         | 445                                          | 458          | 464          | 472          | 484         | 496          | 503          | 506          |
|                         |                                                               | 1.2 HP<br>[895] | High Heat -<br>Tap 2    | CFM           | 1795                                         | 1745         | 1699         | 1652         | 1612        | 1564         | 1522         | 1478         |
|                         |                                                               |                 |                         | WATTS         | 841                                          | 859          | 874          | 886          | 905         | 915          | 928          | 942          |
|                         |                                                               | 1.2 HP<br>[895] | Low Cool -<br>Tap 3     | CFM           | 1318                                         | 1268         | 1214         | 1157         | 1094        | 1030         | 976          | 926          |
|                         |                                                               |                 |                         | WATTS         | 524                                          | 535          | 547          | 557          | 564         | 571          | 580          | 588          |
|                         |                                                               | 1.2 HP<br>[895] | High Cool -<br>Tap 4*   | CFM           | 2084                                         | 2048         | 2003         | 1960         | 1922        | 1874         | 1823         | 1777         |
|                         |                                                               |                 |                         | WATTS         | 1151                                         | 1170         | 1188         | 1204         | 1219        | 1232         | 1242         | 1255         |
|                         |                                                               | 1.2 HP<br>[895] | Max Speed -<br>Tap 5    | CFM           | 2161                                         | 2093         | 2047         | 1991         | 1942        | 1881         | 1830         | 1767         |
|                         |                                                               |                 |                         | WATTS         | 1243                                         | 1243         | 1244         | 1244         | 1243        | 1245         | 1242         | 1243         |

The data provided in this table is calculated from airflow operation with MERV 8 filters installed.

**NOTES:** \* Tap 4 - Factory Cooling Tap  
Pressure drops across the 3-5T CFM range (1050 - 2250)  
Wet coil: ~0.09 Inches W.C.  
Downflow: ~0.1 Inches W.C.  
Reheat coil: ~0.09 Inches W.C.

[ ] Designates Metric Conversions

| ELECTRICAL DATA – RACCYB SERIES |                                                               |         |         |         |         |         |         |         |
|---------------------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|
|                                 |                                                               | 036ACT  | 036ACU  | 036ADT  | 036ADU  | 036AJT  | 036AYT  | 036AYU  |
| Unit Information                | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 414-506 | 414-506 | 187-253 | 518-633 | 518-633 |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                                 | Phase                                                         | 3       | 3       | 3       | 3       | 1       | 3       | 3       |
|                                 | Hz                                                            | 60      | 60      | 60      | 60      | 60      | 60      | 60      |
|                                 | Minimum Circuit Ampacity                                      | 24      | 29      | 10      | 11      | 25      | 9       | 11      |
|                                 | Minimum Circuit Ampacity with Power Exhaust                   | 27      | 32      | 12      | 13      | 28      | 10      | 12      |
|                                 | Minimum Overcurrent Protection Device Size                    | 30      | 35      | 15      | 15      | 30      | 15      | 15      |
|                                 | Minimum Overcurrent Protection Device Size with Power Exhaust | 30      | 40      | 15      | 15      | 35      | 15      | 15      |
|                                 | Maximum Overcurrent Protection Device Size                    | 35      | 40      | 15      | 15      | 35      | 15      | 15      |
|                                 | Maximum Overcurrent Protection Device Size with Power Exhaust | 35      | 40      | 15      | 15      | 40      | 15      | 15      |
| Compressor Motor                | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                                 | Phase                                                         | 3       | 3       | 3       | 3       | 1       | 3       | 3       |
|                                 | Amps (RLA)                                                    | 12.8    | 12.8    | 5.1     | 5.1     | 13.5    | 4.5     | 4.5     |
|                                 | Amps (LRA)                                                    | 97.5    | 97.5    | 44.3    | 44.3    | 82.5    | 27.1    | 27.1    |
| Condenser Motor                 | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 1/5     | 1/5     | 1/5     | 1/5     | 1/5     | 1/5     | 1/5     |
|                                 | Amps (FLA, each)                                              | 1       | 1       | 0.8     | 0.8     | 1       | 0.55    | 0.55    |
|                                 | Amps (LRA, each)                                              | 2.3     | 2.3     | 1.4     | 1.4     | 2.3     | 1.1     | 1.1     |
| Evaporator Fan                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 208-230 | 208-230 |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 3/4     | 1-1/2   | 3/4     | 1       | 3/4     | 3/4     | 1-1/2   |
|                                 | Amps (FLA, each)                                              | 6       | 11.5    | 2.7     | 3.5     | 6       | 2.4     | 4.6     |



## ELECTRICAL DATA – RACCYB SERIES

|                  |                                                               | 048ACT  | 048ACU  | 048ADT  | 048ADU  | 048AJT  | 048AYT  | 048AYU  |
|------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|
| Unit Information | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 414-506 | 414-506 | 187-253 | 518-633 | 518-633 |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                  | Phase                                                         | 3       | 3       | 3       | 3       | 1       | 3       | 3       |
|                  | Hz                                                            | 60      | 60      | 60      | 60      | 60      | 60      | 60      |
|                  | Minimum Circuit Ampacity                                      | 24      | 30      | 13      | 13      | 30      | 10      | 12      |
|                  | Minimum Circuit Ampacity with Power Exhaust                   | 27      | 33      | 15      | 16      | 34      | 11      | 14      |
|                  | Minimum Overcurrent Protection Device Size                    | 30      | 35      | 15      | 15      | 35      | 15      | 15      |
|                  | Minimum Overcurrent Protection Device Size with Power Exhaust | 30      | 40      | 20      | 20      | 40      | 15      | 15      |
|                  | Maximum Overcurrent Protection Device Size                    | 35      | 40      | 15      | 15      | 45      | 15      | 15      |
|                  | Maximum Overcurrent Protection Device Size with Power Exhaust | 35      | 40      | 20      | 20      | 50      | 15      | 15      |
| Compressor Motor | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                  | Phase                                                         | 3       | 3       | 3       | 3       | 1       | 3       | 3       |
|                  | Amps (RLA)                                                    | 12.2    | 12.2    | 6.4     | 6.4     | 17.3    | 5.1     | 5.1     |
|                  | Amps (LRA)                                                    | 120.4   | 120.4   | 48.5    | 48.5    | 126     | 41      | 41      |
| Condenser Motor  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                  | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | HP                                                            | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     |
|                  | Amps (FLA, each)                                              | 2.3     | 2.3     | 1.5     | 1.5     | 2.3     | 1       | 1       |
|                  | Amps (LRA, each)                                              | 5.1     | 5.1     | 3.1     | 3.1     | 5.1     | 2.2     | 2.2     |
| Evaporator Fan   | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 208/230 | 208/230 |
|                  | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | HP                                                            | 3/4     | 1-1/2   | 3/4     | 1       | 3/4     | 3/4     | 1-1/2   |
|                  | Amps (FLA, each)                                              | 6       | 11.5    | 2.7     | 3.5     | 6       | 2.4     | 4.6     |

# ELECTRICAL DATA – RACCYB SERIES

|                  |                                                               | 060ACT  | 060ACU  | 060ADT  | 060ADU  | 060AJT  | 060AYT  | 060AYU  |
|------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|
| Unit Information | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 414-506 | 414-506 | 187-253 | 518-633 | 518-633 |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                  | Phase                                                         | 3       | 3       | 3       | 3       | 1       | 3       | 3       |
|                  | Hz                                                            | 60      | 60      | 60      | 60      | 60      | 60      | 60      |
|                  | Minimum Circuit Ampacity                                      | 30      | 34      | 15      | 15      | 38      | 13      | 14      |
|                  | Minimum Circuit Ampacity with Power Exhaust                   | 33      | 37      | 17      | 17      | 41      | 14      | 15      |
|                  | Minimum Overcurrent Protection Device Size                    | 35      | 40      | 20      | 20      | 45      | 15      | 20      |
|                  | Minimum Overcurrent Protection Device Size with Power Exhaust | 40      | 45      | 20      | 20      | 50      | 15      | 20      |
|                  | Maximum Overcurrent Protection Device Size                    | 45      | 45      | 20      | 20      | 50      | 15      | 20      |
| Compressor Motor | Maximum Overcurrent Protection Device Size with Power Exhaust | 45      | 50      | 20      | 20      | 60      | 15      | 20      |
|                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                  | Phase                                                         | 3       | 3       | 3       | 3       | 1       | 3       | 3       |
|                  | Amps (RLA)                                                    | 16      | 16      | 7.7     | 7.7     | 21.8    | 6.4     | 6.4     |
| Condenser Motor  | Amps (LRA)                                                    | 156.4   | 156.4   | 58.1    | 58.1    | 143     | 47.8    | 47.8    |
|                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 575     | 575     |
|                  | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | HP                                                            | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     |
|                  | Amps (FLA, each)                                              | 2.3     | 2.3     | 1.5     | 1.5     | 2.3     | 1       | 1       |
| Evaporator Fan   | Amps (LRA, each)                                              | 5.1     | 5.1     | 3.1     | 3.1     | 5.1     | 2.2     | 2.2     |
|                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 208/230 | 208/230 |
|                  | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1       |
|                  | HP                                                            | 1       | 1-1/2   | 1       | 1-1/5   | 1       | 1       | 1-1/2   |
|                  | Amps (FLA, each)                                              | 7.6     | 11.5    | 3.5     | 3.7     | 7.6     | 3.04    | 4.6     |

| ELECTRICAL DATA – RACCYB SERIES |                                                               |         |         |         |         |         |         |                |         |         |         |
|---------------------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|---------|----------------|---------|---------|---------|
|                                 |                                                               | 072ACT  | 072ACU  | 072ADT  | 072ADU  | 072AYT  | 072AYU  | 072ACT         | 072ACU  | 072ADT  | 072ADU  |
|                                 |                                                               |         |         |         |         |         |         | with HUMIDIDRY |         |         |         |
| Unit Information                | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 414-506 | 414-506 | 518-633 | 518-633 | 187-253        | 187-253 | 414-506 | 414-506 |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 575     | 575     | 208/230        | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 3       | 3       | 3       | 3       | 3       | 3       | 3              | 3       | 3       | 3       |
|                                 | Hz                                                            | 60      | 60      | 60      | 60      | 60      | 60      | 60             | 60      | 60      | 60      |
|                                 | Minimum Circuit Ampacity                                      | 38      | 38      | 18      | 18      | 13      | 13      | 39             | 39      | 18      | 18      |
|                                 | Minimum Circuit Ampacity with Power Exhaust                   | 41      | 41      | 20      | 20      | 14      | 14      | 42             | 42      | 20      | 20      |
|                                 | Minimum Overcurrent Protection Device Size                    | 45      | 45      | 20      | 20      | 15      | 15      | 45             | 45      | 20      | 20      |
|                                 | Minimum Overcurrent Protection Device Size with Power Exhaust | 50      | 50      | 25      | 25      | 20      | 20      | 50             | 50      | 25      | 25      |
|                                 | Maximum Overcurrent Protection Device Size                    | 50      | 50      | 25      | 25      | 15      | 15      | 50             | 50      | 25      | 25      |
|                                 | Maximum Overcurrent Protection Device Size with Power Exhaust | 60      | 60      | 25      | 25      | 20      | 20      | 60             | 60      | 25      | 25      |
| Compressor Motor                | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 575     | 575     | 208/230        | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 3       | 3       | 3       | 3       | 3       | 3       | 3              | 3       | 3       | 3       |
|                                 | Amps (RLA)                                                    | 19.2    | 19.2    | 9.1     | 9.1     | 6.2     | 6.2     | 19.2           | 19.2    | 9.1     | 9.1     |
|                                 | Amps (LRA)                                                    | 162     | 162     | 70.8    | 70.8    | 58.2    | 58.2    | 162            | 162     | 70.8    | 70.8    |
| Condenser Motor                 | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 575     | 575     | 208/230        | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       |
|                                 | HP                                                            | 3/4     | 3/4     | 3/4     | 3/4     | 3/4     | 3/4     | 3/4            | 3/4     | 3/4     | 3/4     |
|                                 | Amps (FLA, each)                                              | 4.2     | 4.2     | 2.3     | 2.3     | 1.2     | 1.2     | 5.3            | 5.3     | 2.3     | 2.3     |
|                                 | Amps (LRA, each)                                              | 10.1    | 10.1    | 4.9     | 4.9     | 3.4     | 3.4     | N/A            | N/A     | N/A     | N/A     |
| Evaporator Fan                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 460     | 460     | 208/230 | 208/230 | 208/230        | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       |
|                                 | HP                                                            | 1-1/5   | 1-1/5   | 1-1/5   | 1-1/5   | 1-1/5   | 1-1/5   | 1-1/5          | 1-1/5   | 1-1/5   | 1-1/5   |
|                                 | Amps (FLA, each)                                              | 9.6     | 9.6     | 3.7     | 3.7     | 3.8     | 3.8     | 9.6            | 9.6     | 3.7     | 3.7     |

| ELECTRICAL DATA – RACCYC SERIES |                                                               |         |         |         |         |         |
|---------------------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|
|                                 |                                                               | 036AJT  | 036ACT  | 036ACU  | 036ADT  | 036ADU  |
| Unit Information                | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 187-253 | 414-506 | 414-506 |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 3       | 3       | 3       | 3       |
|                                 | Hz                                                            | 60      | 60      | 60      | 60      | 60      |
|                                 | Minimum Circuit Ampacity                                      | 28/28   | 22/22   | 28/28   | 11      | 12      |
|                                 | Minimum Circuit Ampacity with Power Exhaust                   | 31/31   | 25/25   | 31/31   | 13      | 14      |
|                                 | Minimum Overcurrent Protection Device Size                    | 35/35   | 25/25   | 35/35   | 15      | 15      |
|                                 | Minimum Overcurrent Protection Device Size with Power Exhaust | 35/35   | 30/30   | 35/35   | 15      | 15      |
|                                 | Maximum Overcurrent Protection Device Size                    | 40/40   | 30/30   | 35/35   | 15      | 15      |
|                                 | Maximum Overcurrent Protection Device Size with Power Exhaust | 45/45   | 30/30   | 40/40   | 15      | 15      |
| Compressor Motor                | No.                                                           | 1       | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 3       | 3       | 3       | 3       |
|                                 | Amps (RLA)                                                    | 14.6    | 9.9     | 9.9     | 4.8     | 4.8     |
|                                 | Amps (LRA)                                                    | 90.0    | 82.0    | 82.0    | 44.3    | 44.3    |
| Condenser Motor                 | No.                                                           | 1       | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 1/3     | 1/3     | 1/3     | 1/3     | 1/3     |
|                                 | Amps (FLA, each)                                              | 3.5     | 3.5     | 3.5     | 1.6     | 1.6     |
| Evaporator Fan                  | No.                                                           | 1       | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 3/4     | 3/4     | 1-1/2   | 3/4     | 1       |
|                                 | Amps (FLA, each)                                              | 6       | 6       | 11.5    | 2.7     | 3.5     |

| ELECTRICAL DATA – RACCYC SERIES |                                                               |         |         |         |         |         |                |         |         |         |         |
|---------------------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|----------------|---------|---------|---------|---------|
|                                 |                                                               | 048AJT  | 048ACT  | 048ACU  | 048ADT  | 048ADU  | 048AJT         | 048ACT  | 048ACU  | 048ADT  | 048ADU  |
|                                 |                                                               |         |         |         |         |         | with HUMIDIDRY |         |         |         |         |
| Unit Information                | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 187-253 | 414-506 | 414-506 | 187-253        | 187-253 | 187-253 | 414-506 | 414-506 |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 3       | 3       | 3       | 3       | 1              | 3       | 3       | 3       | 3       |
|                                 | Hz                                                            | 60      | 60      | 60      | 60      | 60      | 60             | 60      | 60      | 60      | 60      |
|                                 | Minimum Circuit Ampacity                                      | 35/35   | 27/27   | 32/32   | 14      | 15      | 35/35          | 27/27   | 32/32   | 14      | 15      |
|                                 | Minimum Circuit Ampacity with Power Exhaust                   | 38/38   | 30/30   | 35/35   | 16      | 17      | 38/38          | 30/30   | 35/35   | 16      | 17      |
|                                 | Minimum Overcurrent Protection Device Size                    | 40/40   | 30/30   | 35/35   | 20      | 20      | 40/40          | 30/30   | 35/35   | 20      | 20      |
|                                 | Minimum Overcurrent Protection Device Size with Power Exhaust | 45/45   | 35/35   | 40/40   | 20      | 20      | 45/45          | 35/35   | 40/40   | 20      | 20      |
|                                 | Maximum Overcurrent Protection Device Size                    | 50/50   | 35/35   | 40/40   | 20      | 20      | 50/50          | 35/35   | 40/40   | 20      | 20      |
|                                 | Maximum Overcurrent Protection Device Size with Power Exhaust | 50/50   | 40/40   | 45/45   | 20      | 20      | 50/50          | 40/40   | 45/45   | 20      | 20      |
| Compressor Motor                | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 3       | 3       | 3       | 3       | 1              | 3       | 3       | 3       | 3       |
|                                 | Amps (RLA)                                                    | 18.3    | 11.9    | 11.9    | 6.8     | 6.8     | 18.3           | 11.9    | 11.9    | 6.8     | 6.8     |
|                                 | Amps (LRA)                                                    | 138     | 112     | 112     | 61.8    | 61.8    | 138            | 112     | 112     | 61.8    | 61.8    |
| Condenser Motor                 | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     | 1/2            | 1/2     | 1/2     | 1/2     | 1/2     |
|                                 | Amps (FLA, each)                                              | 5.3     | 5.3     | 5.3     | 2.3     | 2.3     | 5.3            | 5.3     | 5.3     | 2.3     | 2.3     |
| Evaporator Fan                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 3/4     | 3/4     | 1-1/2   | 3/4     | 1       | 3/4            | 3/4     | 1-1/2   | 3/4     | 1       |
|                                 | Amps (FLA, each)                                              | 6       | 6       | 11.5    | 2.7     | 3.5     | 6              | 6       | 11.5    | 2.7     | 3.5     |

| ELECTRICAL DATA – RACCYC SERIES |                                                               |         |         |         |         |         |                |         |         |         |         |
|---------------------------------|---------------------------------------------------------------|---------|---------|---------|---------|---------|----------------|---------|---------|---------|---------|
|                                 |                                                               | 060AJT  | 060ACT  | 060ACU  | 060ADT  | 060ADU  | 060AJT         | 060ACT  | 060ACU  | 060ADT  | 060ADU  |
|                                 |                                                               |         |         |         |         |         | with HUMIDIDRY |         |         |         |         |
| Unit Information                | Unit Operating Voltage Range                                  | 187-253 | 187-253 | 187-253 | 414-506 | 414-506 | 187-253        | 187-253 | 187-253 | 414-506 | 414-506 |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 3       | 3       | 3       | 3       | 1              | 3       | 3       | 3       | 3       |
|                                 | Hz                                                            | 60      | 60      | 60      | 60      | 60      | 60             | 60      | 60      | 60      | 60      |
|                                 | Minimum Circuit Ampacity                                      | 41/41   | 31/31   | 35/35   | 14      | 14      | 41/41          | 31/31   | 35/35   | 14      | 14      |
|                                 | Minimum Circuit Ampacity with Power Exhaust                   | 44/44   | 34/34   | 38/38   | 16      | 16      | 44/44          | 34/34   | 38/38   | 16      | 16      |
|                                 | Minimum Overcurrent Protection Device Size                    | 50/50   | 35/35   | 40/40   | 20      | 20      | 50/50          | 35/35   | 40/40   | 20      | 20      |
|                                 | Minimum Overcurrent Protection Device Size with Power Exhaust | 50/50   | 40/40   | 45/45   | 20      | 20      | 50/50          | 40/40   | 45/45   | 20      | 20      |
|                                 | Maximum Overcurrent Protection Device Size                    | 60/60   | 40/40   | 45/45   | 20      | 20      | 60/60          | 40/40   | 45/45   | 20      | 20      |
|                                 | Maximum Overcurrent Protection Device Size with Power Exhaust | 60/60   | 45/45   | 50/50   | 20      | 20      | 60/60          | 45/45   | 50/50   | 20      | 20      |
| Compressor Motor                | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 3       | 3       | 3       | 3       | 1              | 3       | 3       | 3       | 3       |
|                                 | Amps (RLA)                                                    | 22.3    | 14      | 14      | 6.3     | 6.3     | 22.3           | 14      | 14      | 6.3     | 6.3     |
|                                 | Amps (LRA)                                                    | 149     | 150     | 150     | 58      | 58      | 149            | 150     | 150     | 58      | 58      |
| Condenser Motor                 | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 1/2     | 1/2     | 1/2     | 1/2     | 1/2     | 1/2            | 1/2     | 1/2     | 1/2     | 1/2     |
|                                 | Amps (FLA, each)                                              | 5.3     | 5.3     | 5.3     | 2.3     | 2.3     | 5.3            | 5.3     | 5.3     | 2.3     | 2.3     |
| Evaporator Fan                  | No.                                                           | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | Volts                                                         | 208/230 | 208/230 | 208/230 | 460     | 460     | 208/230        | 208/230 | 208/230 | 460     | 460     |
|                                 | Phase                                                         | 1       | 1       | 1       | 1       | 1       | 1              | 1       | 1       | 1       | 1       |
|                                 | HP                                                            | 1       | 1       | 1-1/2   | 1       | 1-1/5   | 1              | 1       | 1-1/2   | 1       | 1-1/5   |
|                                 | Amps (FLA, each)                                              | 7.6     | 7.6     | 11.5    | 3.5     | 3.7     | 7.6            | 7.6     | 11.5    | 3.5     | 3.7     |

| 208/230V Three Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                    |                               |           |                               |                                                                         |                                   |                                                                             |                                     |                                                 |                                                    |                                                                              |                                                |                                                                                       |  |
|--------------------------------------------------------------------------------------------|--------------------|-------------------------------|-----------|-------------------------------|-------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------|----------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|--|
| Single Power Supply for Both Unit and Heater Kit                                           |                    |                               |           |                               |                                                                         |                                   |                                                                             |                                     |                                                 | Separate Power Supply for Both Unit and Heater Kit |                                                                              |                                                |                                                                                       |  |
| Unit Model Number<br>RACCYB                                                                | Heater Kit         |                               |           | Air Conditioner               |                                                                         |                                   |                                                                             | Heater Kit                          |                                                 | Air Conditioner                                    |                                                                              |                                                |                                                                                       |  |
|                                                                                            | Model No.<br>RXJU- | Rated kW<br>Heater @ 208/230V | FLA       | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity<br>With<br>Optional<br>Powered<br>Exhaust | Max. Fuse<br>or Ckt.<br>Bkr. Size | Max.<br>Fuse or<br>Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity                 | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |  |
| 036ACT                                                                                     | NONE*              | —/—                           | —/—       | 24/24                         | 27/27                                                                   | 35/35                             | 35/35                                                                       | —                                   | —                                               | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 34/38                         | 38/42                                                                   | 40/45                             | 40/45                                                                       | 27/31                               | 30/35                                           | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 47/53                         | 51/57                                                                   | 50/60                             | 60/60                                                                       | 40/46                               | 40/50                                           | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 60/68                         | 64/72                                                                   | 60/70                             | 70/80                                                                       | 53/61                               | 60/70                                           | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
| 036ACU                                                                                     | NONE*              | —/—                           | —/—       | 29/29                         | 32/32                                                                   | 40/40                             | 40/40                                                                       | —                                   | —                                               | 29/29                                              | 32/32                                                                        | 40/40                                          | 40/40                                                                                 |  |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 41/45                         | 45/49                                                                   | 45/45                             | 45/50                                                                       | 27/31                               | 30/35                                           | 29/29                                              | 32/32                                                                        | 40/40                                          | 40/40                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 54/60                         | 58/64                                                                   | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 29/29                                              | 32/32                                                                        | 40/40                                          | 40/40                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 67/75                         | 71/79                                                                   | 70/80                             | 80/80                                                                       | 53/61                               | 60/70                                           | 29/29                                              | 32/32                                                                        | 40/40                                          | 40/40                                                                                 |  |
| 048ACT                                                                                     | NONE*              | —/—                           | —/—       | 24/24                         | 27/27                                                                   | 35/35                             | 35/35                                                                       | —                                   | —                                               | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 34/38                         | 38/42                                                                   | 35/40                             | 40/45                                                                       | 27/31                               | 30/35                                           | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 47/53                         | 51/57                                                                   | 50/60                             | 60/60                                                                       | 40/46                               | 40/50                                           | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 60/68                         | 64/72                                                                   | 60/70                             | 70/80                                                                       | 53/61                               | 60/70                                           | 24/24                                              | 27/27                                                                        | 35/35                                          | 35/35                                                                                 |  |
| 048ACU                                                                                     | NONE*              | —/—                           | —/—       | 30/30                         | 33/33                                                                   | 40/40                             | 40/40                                                                       | —                                   | —                                               | 30/30                                              | 33/33                                                                        | 40/40                                          | 40/40                                                                                 |  |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 41/45                         | 45/49                                                                   | 45/45                             | 45/50                                                                       | 27/31                               | 30/35                                           | 30/30                                              | 33/33                                                                        | 40/40                                          | 40/40                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 54/60                         | 58/64                                                                   | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 30/30                                              | 33/33                                                                        | 40/40                                          | 40/40                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 67/75                         | 71/79                                                                   | 70/80                             | 80/80                                                                       | 53/61                               | 60/70                                           | 30/30                                              | 33/33                                                                        | 40/40                                          | 40/40                                                                                 |  |
| 060ACT                                                                                     | NONE*              | —/—                           | —/—       | 30/30                         | 33/33                                                                   | 45/45                             | 45/45                                                                       | —                                   | —                                               | 30/30                                              | 33/33                                                                        | 45/45                                          | 45/45                                                                                 |  |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 36/40                         | 40/44                                                                   | 45/45                             | 45/45                                                                       | 27/31                               | 30/35                                           | 30/30                                              | 33/33                                                                        | 45/45                                          | 45/45                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 49/55                         | 53/59                                                                   | 50/60                             | 60/60                                                                       | 40/46                               | 40/50                                           | 30/30                                              | 33/33                                                                        | 45/45                                          | 45/45                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 62/70                         | 66/74                                                                   | 70/70                             | 70/80                                                                       | 53/61                               | 60/70                                           | 30/30                                              | 33/33                                                                        | 45/45                                          | 45/45                                                                                 |  |
| 060ACU                                                                                     | NONE*              | —/—                           | —/—       | 34/34                         | 37/37                                                                   | 45/45                             | 50/50                                                                       | —                                   | —                                               | 34/34                                              | 37/37                                                                        | 45/45                                          | 50/50                                                                                 |  |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 41/45                         | 45/49                                                                   | 45/45                             | 50/50                                                                       | 27/31                               | 30/35                                           | 34/34                                              | 37/37                                                                        | 45/45                                          | 50/50                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 54/60                         | 58/64                                                                   | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 34/34                                              | 37/37                                                                        | 45/45                                          | 50/50                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 67/75                         | 71/79                                                                   | 70/80                             | 80/80                                                                       | 53/61                               | 60/70                                           | 34/34                                              | 37/37                                                                        | 45/45                                          | 50/50                                                                                 |  |
| 072ACT                                                                                     | NONE*              | —/—                           | —/—       | 38/38                         | 41/41                                                                   | 50/50                             | 60/60                                                                       | —                                   | —                                               | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 52/58                         | 56/62                                                                   | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 65/73                         | 68/76                                                                   | 70/80                             | 70/80                                                                       | 53/61                               | 60/70                                           | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                            | DC24CP             | 18.0/24.0                     | 50.0/57.7 | 75/85                         | 79/88                                                                   | 80/90                             | 80/90                                                                       | 63/73                               | 70/80                                           | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
| 072ACU                                                                                     | NONE*              | —/—                           | —/—       | 38/38                         | 41/41                                                                   | 50/50                             | 60/60                                                                       | —                                   | —                                               | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 52/58                         | 56/62                                                                   | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 65/73                         | 68/76                                                                   | 70/80                             | 70/80                                                                       | 53/61                               | 60/70                                           | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                            | DC24CP             | 18.0/24.0                     | 50.0/57.7 | 75/85                         | 79/88                                                                   | 80/90                             | 80/90                                                                       | 63/73                               | 70/80                                           | 38/38                                              | 41/41                                                                        | 50/50                                          | 60/60                                                                                 |  |



| 460V Three Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                   |                              |      |                               |                                                                 |                                   |                                                                             |                                     |                                                 |                                    |                                                                              |                                                |                                                                                       |
|----------------------------------------------------------------------------------------|-------------------|------------------------------|------|-------------------------------|-----------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------|------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|
| Single Power Supply for Both Unit and Heater Kit                                       |                   |                              |      |                               |                                                                 |                                   | Separate Power Supply for Both Unit and Heater Kit                          |                                     |                                                 |                                    |                                                                              |                                                |                                                                                       |
| Unit Model Number<br>RACCYB                                                            | Heater Kit        |                              |      | Air Conditioner               |                                                                 |                                   |                                                                             | Heater Kit                          |                                                 |                                    | Air Conditioner                                                              |                                                |                                                                                       |
|                                                                                        | Model No.<br>RXJ- | Rated<br>Heater kW<br>@ 460V | FLA  | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity<br>Optional<br>Powered<br>Exhaust | Max. Fuse<br>or Ckt.<br>Bkr. Size | Max.<br>Fuse or<br>Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |
| 036ADT                                                                                 | NONE*             | —                            | —    | 10                            | 12                                                              | 15                                | 15                                                                          | —                                   | —                                               | 10                                 | 12                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 19                            | 21                                                              | 20                                | 25                                                                          | 15                                  | 15                                              | 10                                 | 12                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 26                            | 29                                                              | 30                                | 30                                                                          | 23                                  | 25                                              | 10                                 | 12                                                                           | 15                                             | 15                                                                                    |
| 036ADU                                                                                 | DC20DNV           | 20.0                         | 24.1 | 34                            | 37                                                              | 35                                | 40                                                                          | 31                                  | 35                                              | 10                                 | 12                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 11                            | 13                                                              | 15                                | 15                                                                          | —                                   | —                                               | 11                                 | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 20                            | 22                                                              | 20                                | 25                                                                          | 15                                  | 15                                              | 11                                 | 13                                                                           | 15                                             | 15                                                                                    |
| 048ADT                                                                                 | DC15DNV           | 15.0                         | 18.1 | 27                            | 30                                                              | 30                                | 30                                                                          | 23                                  | 25                                              | 11                                 | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                              | 35                                | 40                                                                          | 31                                  | 35                                              | 11                                 | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 13                            | 15                                                              | 15                                | 20                                                                          | —                                   | —                                               | 13                                 | 15                                                                           | 15                                             | 20                                                                                    |
| 048ADU                                                                                 | DC10DNV           | 10.0                         | 12.0 | 19                            | 21                                                              | 20                                | 25                                                                          | 15                                  | 15                                              | 13                                 | 15                                                                           | 15                                             | 20                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 26                            | 29                                                              | 30                                | 30                                                                          | 23                                  | 25                                              | 13                                 | 15                                                                           | 15                                             | 20                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 34                            | 37                                                              | 35                                | 40                                                                          | 31                                  | 35                                              | 13                                 | 15                                                                           | 15                                             | 20                                                                                    |
| 060ADT                                                                                 | NONE*             | —                            | —    | 13                            | 16                                                              | 15                                | 20                                                                          | —                                   | —                                               | 13                                 | 16                                                                           | 15                                             | 20                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 20                            | 22                                                              | 20                                | 25                                                                          | 15                                  | 15                                              | 13                                 | 16                                                                           | 15                                             | 20                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 27                            | 30                                                              | 30                                | 30                                                                          | 23                                  | 25                                              | 13                                 | 16                                                                           | 15                                             | 20                                                                                    |
| 060ADU                                                                                 | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                              | 35                                | 40                                                                          | 31                                  | 35                                              | 13                                 | 16                                                                           | 15                                             | 20                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 15                            | 17                                                              | 20                                | 20                                                                          | —                                   | —                                               | 15                                 | 17                                                                           | 20                                             | 20                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 20                            | 22                                                              | 20                                | 25                                                                          | 15                                  | 15                                              | 15                                 | 17                                                                           | 20                                             | 20                                                                                    |
| 072ADT                                                                                 | DC15DNV           | 15.0                         | 18.1 | 27                            | 30                                                              | 30                                | 30                                                                          | 23                                  | 25                                              | 15                                 | 17                                                                           | 20                                             | 20                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                              | 35                                | 40                                                                          | 31                                  | 35                                              | 15                                 | 17                                                                           | 20                                             | 20                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 18                            | 20                                                              | 25                                | 25                                                                          | —                                   | —                                               | 18                                 | 20                                                                           | 25                                             | 25                                                                                    |
| 072ADU                                                                                 | DC15DNV           | 15.0                         | 18.1 | 28                            | 30                                                              | 30                                | 30                                                                          | 23                                  | 25                                              | 18                                 | 20                                                                           | 25                                             | 25                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                              | 35                                | 40                                                                          | 31                                  | 35                                              | 18                                 | 20                                                                           | 25                                             | 25                                                                                    |
|                                                                                        | DC24DNV           | 24.0                         | 28.9 | 41                            | 44                                                              | 45                                | 45                                                                          | 37                                  | 40                                              | 18                                 | 20                                                                           | 25                                             | 25                                                                                    |

| 208/230V One Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                    |                                  |           |                               |                                                                         |                                                    |                                     |                                                 |                                                                              |                                                |                                                                                       |  |
|------------------------------------------------------------------------------------------|--------------------|----------------------------------|-----------|-------------------------------|-------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------|-------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|--|
| Single Power Supply for Both Unit and Heater Kit                                         |                    |                                  |           |                               |                                                                         | Separate Power Supply for Both Unit and Heater Kit |                                     |                                                 |                                                                              |                                                |                                                                                       |  |
| Unit Model Number<br>RACCYB                                                              | Heater Kit         |                                  |           | Air Conditioner               |                                                                         |                                                    | Heater Kit                          |                                                 | Air Conditioner                                                              |                                                |                                                                                       |  |
|                                                                                          | Model No.<br>RXJJ- | Rated<br>Heater kW<br>@ 208/230V | FLA       | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity<br>With<br>Optional<br>Powered<br>Exhaust | Max. Fuse<br>or Ckt.<br>Bkr. Size                  | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |  |
| 036AJT                                                                                   | NONE*              | —/—                              | —/—       | 25/25                         | 28/28                                                                   | 35/35                                              | —                                   | —                                               | 25/25                                                                        | 35/35                                          | 40/40                                                                                 |  |
|                                                                                          | DC10JT             | 7.5/10.0                         | 36.2/41.7 | 53/60                         | 57/64                                                                   | 60/60                                              | 46/53                               | 50/60                                           | 25/25                                                                        | 35/35                                          | 40/40                                                                                 |  |
|                                                                                          | DC15JT             | 11.3/15.0                        | 54.3/62.7 | 76/86                         | 80/90                                                                   | 80/90                                              | 68/79                               | 70/80                                           | 25/25                                                                        | 35/35                                          | 40/40                                                                                 |  |
|                                                                                          | DC20JT             | 15.0/20.0                        | 72.2/83.3 | 98/112                        | 102/116                                                                 | 100/125                                            | 91/105                              | 100/110                                         | 25/25                                                                        | 35/35                                          | 40/40                                                                                 |  |
| 048AJT                                                                                   | NONE*              | —/—                              | —/—       | 30/30                         | 34/34                                                                   | 45/45                                              | —                                   | —                                               | 30/30                                                                        | 45/45                                          | 50/50                                                                                 |  |
|                                                                                          | DC10JT             | 7.5/10.0                         | 36.2/41.7 | 53/60                         | 57/64                                                                   | 60/60                                              | 46/53                               | 50/60                                           | 30/30                                                                        | 45/45                                          | 50/50                                                                                 |  |
|                                                                                          | DC15JT             | 11.3/15.0                        | 54.3/62.7 | 76/86                         | 80/90                                                                   | 80/90                                              | 68/79                               | 70/80                                           | 30/30                                                                        | 45/45                                          | 50/50                                                                                 |  |
|                                                                                          | DC20JT             | 15.0/20.0                        | 72.2/83.3 | 98/112                        | 102/116                                                                 | 100/125                                            | 91/105                              | 100/110                                         | 30/30                                                                        | 45/45                                          | 50/50                                                                                 |  |
| 060AJT                                                                                   | NONE*              | —/—                              | —/—       | 38/38                         | 41/41                                                                   | 50/50                                              | —                                   | —                                               | 38/38                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                          | DC10JT             | 7.5/10.0                         | 36.2/41.7 | 55/62                         | 59/66                                                                   | 60/70                                              | 46/53                               | 50/60                                           | 38/38                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                          | DC15JT             | 11.3/15.0                        | 54.3/62.7 | 78/88                         | 82/92                                                                   | 80/90                                              | 68/79                               | 70/80                                           | 38/38                                                                        | 50/50                                          | 60/60                                                                                 |  |
|                                                                                          | DC20JT             | 15.0/20.0                        | 72.2/83.3 | 100/114                       | 104/118                                                                 | 100/125                                            | 91/105                              | 100/110                                         | 38/38                                                                        | 50/50                                          | 60/60                                                                                 |  |

| 575V Three Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                   |                              |      |                               |                                                                         |                                   |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
|----------------------------------------------------------------------------------------|-------------------|------------------------------|------|-------------------------------|-------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|
| Single Power Supply for Both Unit and Heater Kit                                       |                   |                              |      |                               | Separate Power Supply for Both Unit and Heater Kit                      |                                   |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
| Unit Model Number<br>RACCYB                                                            | Heater Kit        |                              |      |                               | Air Conditioner                                                         |                                   |                                                                             |                                     | Heater Kit                                      |                                                                              |                                                |                                                                                       |
|                                                                                        | Model No.<br>RXJ- | Rated<br>Heater kW<br>@ 575V | FLA  | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity<br>With<br>Optional<br>Powered<br>Exhaust | Max. Fuse<br>or Ckt.<br>Bkr. Size | Max.<br>Fuse or<br>Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |
| 036AYT                                                                                 | NONE*             | —                            | —    | 9                             | 10                                                                      | 15                                | 15                                                                          | —                                   | —                                               | 9                                                                            | 15                                             | 15                                                                                    |
|                                                                                        | DC10Y             | 10.0                         | 9.6  | 15                            | 17                                                                      | 15                                | 20                                                                          | 12                                  | 15                                              | 9                                                                            | 15                                             | 15                                                                                    |
|                                                                                        | DC15Y             | 15.0                         | 14.5 | 22                            | 23                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 9                                                                            | 15                                             | 15                                                                                    |
| 036AYU                                                                                 | DC20Y             | 20.0                         | 19.3 | 28                            | 29                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 9                                                                            | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 11                            | 12                                                                      | 15                                | 15                                                                          | —                                   | —                                               | 11                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC10Y             | 10.0                         | 9.6  | 18                            | 20                                                                      | 20                                | 20                                                                          | 12                                  | 15                                              | 11                                                                           | 15                                             | 15                                                                                    |
| 048AYT                                                                                 | DC15Y             | 15.0                         | 14.5 | 24                            | 26                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 11                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC20Y             | 20.0                         | 19.3 | 30                            | 32                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 11                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 10                            | 11                                                                      | 15                                | 15                                                                          | —                                   | —                                               | 10                                                                           | 15                                             | 15                                                                                    |
| 048AYU                                                                                 | DC10Y             | 10.0                         | 9.6  | 15                            | 17                                                                      | 15                                | 20                                                                          | 12                                  | 15                                              | 10                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC15Y             | 15.0                         | 14.5 | 22                            | 23                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 10                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC20Y             | 20.0                         | 19.3 | 28                            | 29                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 10                                                                           | 15                                             | 15                                                                                    |
| 060AYT                                                                                 | NONE*             | —                            | —    | 12                            | 14                                                                      | 15                                | 15                                                                          | —                                   | —                                               | 12                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC10Y             | 10.0                         | 9.6  | 18                            | 20                                                                      | 20                                | 20                                                                          | 12                                  | 15                                              | 12                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC15Y             | 15.0                         | 14.5 | 24                            | 26                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 12                                                                           | 15                                             | 15                                                                                    |
| 060AYU                                                                                 | DC20Y             | 20.0                         | 19.3 | 30                            | 32                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 12                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 13                            | 14                                                                      | 15                                | 15                                                                          | —                                   | —                                               | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC10Y             | 10.0                         | 9.6  | 16                            | 18                                                                      | 20                                | 20                                                                          | 12                                  | 15                                              | 13                                                                           | 15                                             | 15                                                                                    |
| 072AYT                                                                                 | DC15Y             | 15.0                         | 14.5 | 22                            | 24                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC20Y             | 20.0                         | 19.3 | 28                            | 30                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 14                            | 15                                                                      | 20                                | 20                                                                          | —                                   | —                                               | 14                                                                           | 15                                             | 15                                                                                    |
| 072AYU                                                                                 | DC10Y             | 10.0                         | 9.6  | 18                            | 20                                                                      | 20                                | 20                                                                          | 12                                  | 15                                              | 14                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC15Y             | 15.0                         | 14.5 | 24                            | 26                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 14                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC20Y             | 20.0                         | 19.3 | 30                            | 32                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 14                                                                           | 15                                             | 15                                                                                    |
| 072AYT                                                                                 | NONE*             | —                            | —    | 13                            | 14                                                                      | 15                                | 15                                                                          | —                                   | —                                               | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC15Y             | 15.0                         | 14.5 | 23                            | 25                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC20Y             | 20.0                         | 19.3 | 29                            | 31                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 13                                                                           | 15                                             | 15                                                                                    |
| 072AYU                                                                                 | DC24Y             | 24.0                         | 23.1 | 34                            | 35                                                                      | 35                                | 35                                                                          | 29                                  | 30                                              | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 13                            | 14                                                                      | 15                                | 20                                                                          | —                                   | —                                               | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC15Y             | 15.0                         | 14.5 | 23                            | 25                                                                      | 25                                | 30                                                                          | 19                                  | 20                                              | 13                                                                           | 15                                             | 15                                                                                    |
| 072AYU                                                                                 | DC20Y             | 20.0                         | 19.3 | 29                            | 31                                                                      | 30                                | 35                                                                          | 25                                  | 25                                              | 13                                                                           | 15                                             | 15                                                                                    |
|                                                                                        | DC24Y             | 24.0                         | 23.1 | 34                            | 35                                                                      | 35                                | 35                                                                          | 29                                  | 30                                              | 13                                                                           | 15                                             | 15                                                                                    |

| 208/230V Three Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                    |                               |           |                               |                                                    |                                   |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
|--------------------------------------------------------------------------------------------|--------------------|-------------------------------|-----------|-------------------------------|----------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|
| Single Power Supply for Both Unit and Heater Kit                                           |                    |                               |           |                               | Separate Power Supply for Both Unit and Heater Kit |                                   |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
| Unit Model Number<br>RACCYC                                                                | Heater Kit         |                               |           | Air Conditioner               |                                                    |                                   |                                                                             | Heater Kit                          |                                                 | Air Conditioner                                                              |                                                |                                                                                       |
|                                                                                            | Model No.<br>RXJJ- | Rated kW<br>Heater @ 208/230V | FLA       | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity                      | Max. Fuse<br>or Ckt.<br>Bkr. Size | Max.<br>Fuse or<br>Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |
| 036ACT                                                                                     | NONE*              | —/—                           | —/—       | 25/25                         | 22/22                                              | 30/30                             | 30/30                                                                       | —                                   | —                                               | 25/25                                                                        | 30/30                                          | 30/30                                                                                 |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 38/42                         | 34/38                                              | 35/40                             | 40/45                                                                       | 27/31                               | 30/35                                           | 25/25                                                                        | 30/30                                          | 30/30                                                                                 |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 51/57                         | 47/53                                              | 50/60                             | 60/60                                                                       | 40/46                               | 40/50                                           | 25/25                                                                        | 30/30                                          | 30/30                                                                                 |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 64/72                         | 60/68                                              | 60/70                             | 70/80                                                                       | 53/61                               | 60/70                                           | 25/25                                                                        | 30/30                                          | 30/30                                                                                 |
| 036ACU                                                                                     | NONE*              | —/—                           | —/—       | 31/31                         | 28/28                                              | 35/35                             | 40/40                                                                       | —                                   | —                                               | 31/31                                                                        | 35/35                                          | 40/40                                                                                 |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 45/49                         | 41/45                                              | 45/45                             | 45/50                                                                       | 27/31                               | 30/35                                           | 31/31                                                                        | 35/35                                          | 40/40                                                                                 |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 58/64                         | 54/60                                              | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 31/31                                                                        | 35/35                                          | 40/40                                                                                 |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 71/79                         | 67/75                                              | 70/80                             | 80/80                                                                       | 53/61                               | 60/70                                           | 31/31                                                                        | 35/35                                          | 40/40                                                                                 |
| 048ACT                                                                                     | NONE*              | —/—                           | —/—       | 30/30                         | 27/27                                              | 35/35                             | 40/40                                                                       | —                                   | —                                               | 30/30                                                                        | 35/35                                          | 40/40                                                                                 |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 38/42                         | 34/38                                              | 35/40                             | 40/45                                                                       | 27/31                               | 30/35                                           | 30/30                                                                        | 35/35                                          | 40/40                                                                                 |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 51/57                         | 47/53                                              | 50/60                             | 60/60                                                                       | 40/46                               | 40/50                                           | 30/30                                                                        | 35/35                                          | 40/40                                                                                 |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 64/72                         | 60/68                                              | 60/70                             | 70/80                                                                       | 53/61                               | 60/70                                           | 30/30                                                                        | 35/35                                          | 40/40                                                                                 |
| 048ACU                                                                                     | NONE*              | —/—                           | —/—       | 35/35                         | 32/32                                              | 40/40                             | 45/45                                                                       | —                                   | —                                               | 35/35                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 45/49                         | 41/45                                              | 45/45                             | 45/50                                                                       | 27/31                               | 30/35                                           | 35/35                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 58/64                         | 54/60                                              | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 35/35                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 71/79                         | 67/75                                              | 70/80                             | 80/80                                                                       | 53/61                               | 60/70                                           | 35/35                                                                        | 40/40                                          | 45/45                                                                                 |
| 060ACT                                                                                     | NONE*              | —/—                           | —/—       | 34/34                         | 31/31                                              | 40/40                             | 45/45                                                                       | —                                   | —                                               | 34/34                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 40/44                         | 36/40                                              | 40/40                             | 45/45                                                                       | 27/31                               | 30/35                                           | 34/34                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 53/59                         | 49/55                                              | 50/60                             | 60/60                                                                       | 40/46                               | 40/50                                           | 34/34                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 66/74                         | 62/70                                              | 70/70                             | 70/80                                                                       | 53/61                               | 60/70                                           | 34/34                                                                        | 40/40                                          | 45/45                                                                                 |
| 060ACU                                                                                     | NONE*              | —/—                           | —/—       | 38/38                         | 35/35                                              | 45/45                             | 50/50                                                                       | —                                   | —                                               | 38/38                                                                        | 45/45                                          | 50/50                                                                                 |
|                                                                                            | DC10CP             | 7.5/10.0                      | 20.9/24.1 | 45/49                         | 41/45                                              | 45/45                             | 50/50                                                                       | 27/31                               | 30/35                                           | 38/38                                                                        | 45/45                                          | 50/50                                                                                 |
|                                                                                            | DC15CP             | 11.3/15.0                     | 31.4/36.2 | 58/64                         | 54/60                                              | 60/60                             | 60/70                                                                       | 40/46                               | 40/50                                           | 38/38                                                                        | 45/45                                          | 50/50                                                                                 |
|                                                                                            | DC20CP             | 15.0/20.0                     | 41.7/48.1 | 71/79                         | 67/75                                              | 70/80                             | 80/80                                                                       | 53/61                               | 60/70                                           | 38/38                                                                        | 45/45                                          | 50/50                                                                                 |



| 460V Three Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                   |                              |      |                               |                                                                         |                                                    |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
|----------------------------------------------------------------------------------------|-------------------|------------------------------|------|-------------------------------|-------------------------------------------------------------------------|----------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|
| Single Power Supply for Both Unit and Heater Kit                                       |                   |                              |      |                               |                                                                         | Separate Power Supply for Both Unit and Heater Kit |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
| Unit Model Number<br>RACCYC                                                            | Heater Kit        |                              |      | Air Conditioner               |                                                                         |                                                    | Heater Kit                                                                  |                                     | Air Conditioner                                 |                                                                              |                                                |                                                                                       |
|                                                                                        | Model No.<br>RXJ- | Rated<br>Heater kW<br>@ 460V | FLA  | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity<br>With<br>Optional<br>Powered<br>Exhaust | Max. Fuse<br>or Ckt.<br>Bkr. Size                  | Max.<br>Fuse or<br>Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |
| 036ADT                                                                                 | NONE*             | —                            | —    | 11                            | 13                                                                      | 15                                                 | 15                                                                          | —                                   | —                                               | 11                                                                           | 13                                             | 15                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 19                            | 21                                                                      | 20                                                 | 25                                                                          | 15                                  | 15                                              | 11                                                                           | 13                                             | 15                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 26                            | 29                                                                      | 30                                                 | 30                                                                          | 23                                  | 25                                              | 11                                                                           | 13                                             | 15                                                                                    |
| 036ADU                                                                                 | DC20DNV           | 20.0                         | 24.1 | 34                            | 37                                                                      | 35                                                 | 40                                                                          | 31                                  | 35                                              | 11                                                                           | 13                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 12                            | 14                                                                      | 15                                                 | 15                                                                          | —                                   | —                                               | 12                                                                           | 14                                             | 15                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 20                            | 22                                                                      | 20                                                 | 25                                                                          | 15                                  | 15                                              | 12                                                                           | 14                                             | 15                                                                                    |
| 048ADT                                                                                 | DC15DNV           | 15.0                         | 18.1 | 27                            | 30                                                                      | 30                                                 | 30                                                                          | 23                                  | 25                                              | 12                                                                           | 14                                             | 15                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                                      | 35                                                 | 40                                                                          | 31                                  | 35                                              | 12                                                                           | 14                                             | 15                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 14                            | 16                                                                      | 20                                                 | 20                                                                          | —                                   | —                                               | 14                                                                           | 16                                             | 20                                                                                    |
| 048ADU                                                                                 | DC10DNV           | 10.0                         | 12.0 | 19                            | 21                                                                      | 20                                                 | 25                                                                          | 15                                  | 15                                              | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 26                            | 29                                                                      | 30                                                 | 30                                                                          | 23                                  | 25                                              | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 34                            | 37                                                                      | 35                                                 | 40                                                                          | 31                                  | 35                                              | 14                                                                           | 16                                             | 20                                                                                    |
| 060ADT                                                                                 | NONE*             | —                            | —    | 15                            | 17                                                                      | 20                                                 | 20                                                                          | —                                   | —                                               | 15                                                                           | 17                                             | 20                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 20                            | 22                                                                      | 20                                                 | 25                                                                          | 15                                  | 15                                              | 15                                                                           | 17                                             | 20                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 27                            | 30                                                                      | 30                                                 | 30                                                                          | 23                                  | 25                                              | 15                                                                           | 17                                             | 20                                                                                    |
| 060ADU                                                                                 | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                                      | 35                                                 | 40                                                                          | 31                                  | 35                                              | 15                                                                           | 17                                             | 20                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 14                            | 16                                                                      | 20                                                 | 20                                                                          | —                                   | —                                               | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | DC10DNV           | 10.0                         | 12.0 | 20                            | 22                                                                      | 20                                                 | 25                                                                          | 15                                  | 15                                              | 14                                                                           | 16                                             | 20                                                                                    |
| 060ADU                                                                                 | DC15DNV           | 15.0                         | 18.1 | 27                            | 30                                                                      | 30                                                 | 30                                                                          | 23                                  | 25                                              | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                                      | 35                                                 | 40                                                                          | 31                                  | 35                                              | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | NONE*             | —                            | —    | 14                            | 16                                                                      | 20                                                 | 20                                                                          | —                                   | —                                               | 14                                                                           | 16                                             | 20                                                                                    |
| 060ADU                                                                                 | DC10DNV           | 10.0                         | 12.0 | 20                            | 23                                                                      | 20                                                 | 25                                                                          | 15                                  | 15                                              | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | DC15DNV           | 15.0                         | 18.1 | 28                            | 30                                                                      | 30                                                 | 30                                                                          | 23                                  | 25                                              | 14                                                                           | 16                                             | 20                                                                                    |
|                                                                                        | DC20DNV           | 20.0                         | 24.1 | 35                            | 38                                                                      | 35                                                 | 40                                                                          | 31                                  | 35                                              | 14                                                                           | 16                                             | 20                                                                                    |

| 208/230V One Phase, 60 Hz, Auxiliary Electric Heater Kit Characteristics and Application |                    |                                  |           |                               |                                                    |                                   |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
|------------------------------------------------------------------------------------------|--------------------|----------------------------------|-----------|-------------------------------|----------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------|
| Single Power Supply for Both Unit and Heater Kit                                         |                    |                                  |           |                               | Separate Power Supply for Both Unit and Heater Kit |                                   |                                                                             |                                     |                                                 |                                                                              |                                                |                                                                                       |
| Unit Model Number<br>RACCYC                                                              | Heater Kit         |                                  |           | Air Conditioner               |                                                    |                                   |                                                                             | Heater Kit                          |                                                 | Air Conditioner                                                              |                                                |                                                                                       |
|                                                                                          | Model No.<br>RXJJ- | Rated<br>Heater kW<br>@ 208/230V | FLA       | Unit<br>Min. Ckt.<br>Ampacity | Unit<br>Min. Ckt.<br>Ampacity                      | Max. Fuse<br>or Ckt.<br>Bkr. Size | Max.<br>Fuse or<br>Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust | Heater Kit<br>Min. Ckt.<br>Ampacity | Heater Kit<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Min. Ckt.<br>Ampacity<br>with<br>Optional<br>Powered<br>Exhaust | Air Cond.<br>Max. Fuse<br>or Ckt.<br>Bkr. Size | Air Cond.<br>Max. Fuse<br>or Ckt. Bkr.<br>Size with<br>Optional<br>Powered<br>Exhaust |
| 036AJT                                                                                   | NONE*              | —/—                              | —/—       | 31/31                         | 28/28                                              | 40/40                             | 45/45                                                                       | —                                   | —                                               | 31/31                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                          | DC10JT             | 7.5/10.0                         | 36.2/41.7 | 57/64                         | 53/60                                              | 60/60                             | 60/70                                                                       | 46/53                               | 50/60                                           | 31/31                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                          | DC15JT             | 11.3/15.0                        | 54.3/62.7 | 80/90                         | 76/86                                              | 80/90                             | 80/90                                                                       | 68/79                               | 70/80                                           | 31/31                                                                        | 40/40                                          | 45/45                                                                                 |
|                                                                                          | DC20JT             | 15.0/20.0                        | 72.2/83.3 | 102/116                       | 98/112                                             | 100/125                           | 110/125                                                                     | 91/105                              | 100/110                                         | 31/31                                                                        | 40/40                                          | 45/45                                                                                 |
| 048AJT                                                                                   | NONE*              | —/—                              | —/—       | 38/38                         | 35/35                                              | 50/50                             | 50/50                                                                       | —                                   | —                                               | 38/38                                                                        | 50/50                                          | 50/50                                                                                 |
|                                                                                          | DC10JT             | 7.5/10.0                         | 36.2/41.7 | 57/64                         | 53/60                                              | 60/60                             | 60/70                                                                       | 46/53                               | 50/60                                           | 38/38                                                                        | 50/50                                          | 50/50                                                                                 |
|                                                                                          | DC15JT             | 11.3/15.0                        | 54.3/62.7 | 80/90                         | 76/86                                              | 80/90                             | 80/90                                                                       | 68/79                               | 70/80                                           | 38/38                                                                        | 50/50                                          | 50/50                                                                                 |
|                                                                                          | DC20JT             | 15.0/20.0                        | 72.2/83.3 | 102/116                       | 98/112                                             | 100/125                           | 110/125                                                                     | 91/105                              | 100/110                                         | 38/38                                                                        | 50/50                                          | 50/50                                                                                 |
| 060AJT                                                                                   | NONE*              | —/—                              | —/—       | 44/44                         | 41/41                                              | 60/60                             | 60/60                                                                       | —                                   | —                                               | 44/44                                                                        | 60/60                                          | 60/60                                                                                 |
|                                                                                          | DC10JT             | 7.5/10.0                         | 36.2/41.7 | 59/66                         | 55/62                                              | 60/70                             | 60/70                                                                       | 46/53                               | 50/60                                           | 44/44                                                                        | 60/60                                          | 60/60                                                                                 |
|                                                                                          | DC15JT             | 11.3/15.0                        | 54.3/62.7 | 82/92                         | 78/88                                              | 80/90                             | 90/100                                                                      | 68/79                               | 70/80                                           | 44/44                                                                        | 60/60                                          | 60/60                                                                                 |
|                                                                                          | DC20JT             | 15.0/20.0                        | 72.2/83.3 | 104/118                       | 100/114                                            | 100/125                           | 110/125                                                                     | 91/105                              | 100/110                                         | 44/44                                                                        | 60/60                                          | 60/60                                                                                 |

## A2L REFRIGERANT INSTALLATION SAFETY DATA

|                                            |                                  | RACCYB036                                            | RACCYB036<br>w/HumidiDry | RACCYB048 | RACCYB048<br>w/HumidiDry | RACCYB060 | RACCYB060<br>w/HumidiDry | RACCYB072 | RACCYB072<br>w/HumidiDry |
|--------------------------------------------|----------------------------------|------------------------------------------------------|--------------------------|-----------|--------------------------|-----------|--------------------------|-----------|--------------------------|
| Refrigerant Charge Weight (oz)             |                                  | 72                                                   | 101                      | 67        | 110                      | 80        | 105                      | 85        | 123                      |
| Minimum Circulation Airflow, Qmin (CFM)    |                                  | 239                                                  | 336                      | 223       | 366                      | 266       | 349                      | 283       | 409                      |
| Installed Altitude<br>(ft above sea level) | Altitude<br>Adjustment<br>Factor | Minimum Total Conditioned Room Area, TAmin (sq. ft.) |                          |           |                          |           |                          |           |                          |
| 0                                          | 1.000                            | 133                                                  | 186                      | 123       | 203                      | 147       | 194                      | 157       | 227                      |
| 1000                                       | 1.025                            | 136                                                  | 191                      | 127       | 208                      | 151       | 198                      | 161       | 232                      |
| 2000                                       | 1.051                            | 139                                                  | 196                      | 130       | 213                      | 155       | 203                      | 165       | 238                      |
| 3000                                       | 1.078                            | 143                                                  | 201                      | 133       | 219                      | 159       | 209                      | 169       | 244                      |
| 4000                                       | 1.107                            | 147                                                  | 206                      | 137       | 224                      | 163       | 214                      | 173       | 251                      |
| 5000                                       | 1.138                            | 151                                                  | 212                      | 141       | 231                      | 168       | 220                      | 178       | 258                      |
| 6000                                       | 1.170                            | 155                                                  | 218                      | 144       | 237                      | 173       | 226                      | 183       | 265                      |
| 6500                                       | 1.187                            | 158                                                  | 221                      | 147       | 241                      | 175       | 230                      | 186       | 269                      |


|                                         |                                  | RACCYC036                                            | RACCYC036<br>w/HumidiDry | RACCYC048 | RACCYC048<br>w/HumidiDry | RACCYC060 | RACCYC060<br>w/HumidiDry |
|-----------------------------------------|----------------------------------|------------------------------------------------------|--------------------------|-----------|--------------------------|-----------|--------------------------|
| Refrigerant Charge Weight (oz)          |                                  | 66                                                   | 106                      | 75        | 116                      | 81        | 121                      |
| Minimum Circulation Airflow, Qmin (CFM) |                                  | 220                                                  | 353                      | 249       | 386                      | 269       | 402                      |
| Altitude Above<br>Sea Level (Ft.)       | Altitude<br>Adjustment<br>Factor | Minimum Total Conditioned Room Area, TAmin (Sq. Ft.) |                          |           |                          |           |                          |
| 0                                       | 1.000                            | 122                                                  | 195                      | 138       | 214                      | 149       | 223                      |
| 1000                                    | 1.025                            | 125                                                  | 200                      | 142       | 219                      | 153       | 229                      |
| 2000                                    | 1.051                            | 128                                                  | 205                      | 145       | 225                      | 157       | 234                      |
| 3000                                    | 1.078                            | 131                                                  | 211                      | 149       | 230                      | 161       | 240                      |
| 4000                                    | 1.107                            | 135                                                  | 216                      | 153       | 237                      | 165       | 247                      |
| 5000                                    | 1.138                            | 138                                                  | 222                      | 157       | 243                      | 170       | 254                      |
| 6000                                    | 1.170                            | 142                                                  | 229                      | 162       | 250                      | 175       | 261                      |
| 6500                                    | 1.187                            | 144                                                  | 232                      | 164       | 254                      | 177       | 265                      |

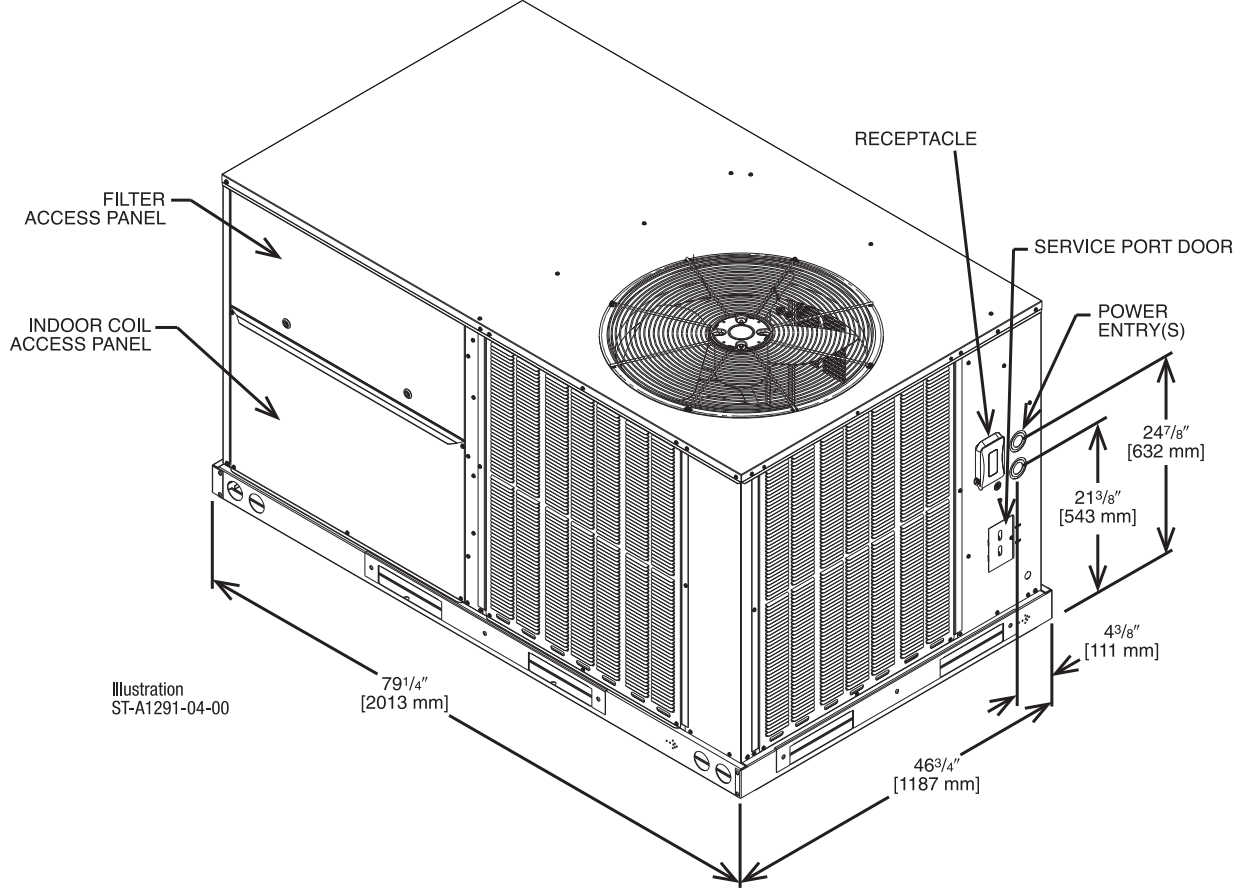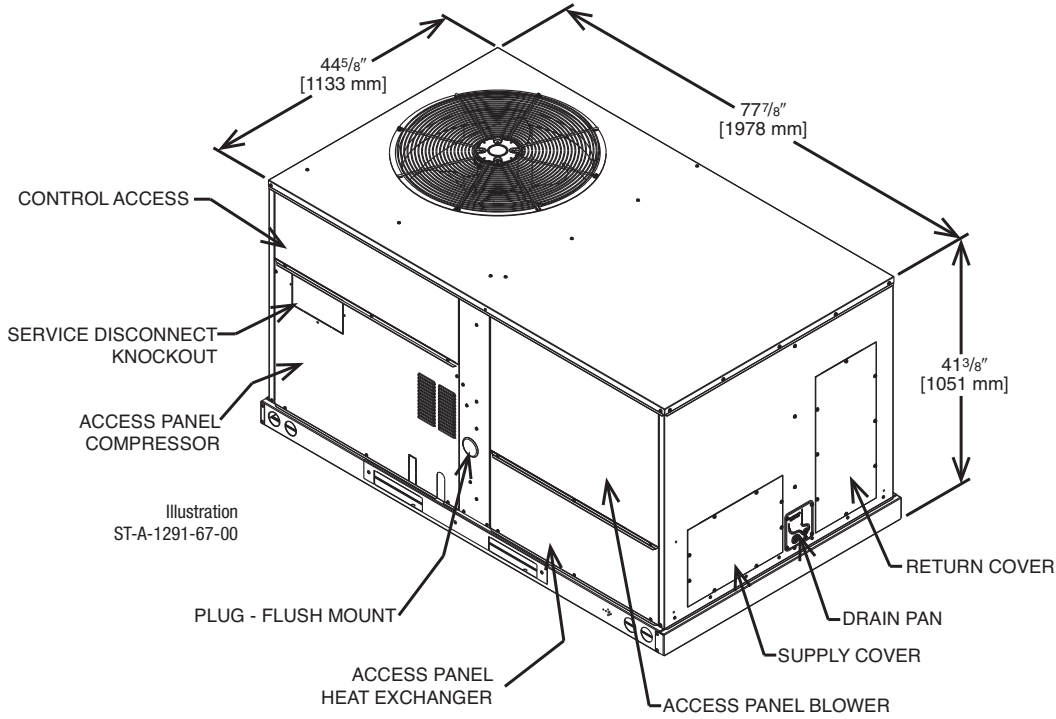


[ ] Designates Metric Conversions



## SUPPLY AND RETURN DIMENSIONS FOR HORIZONTAL APPLICATIONS (SIDE VIEW)

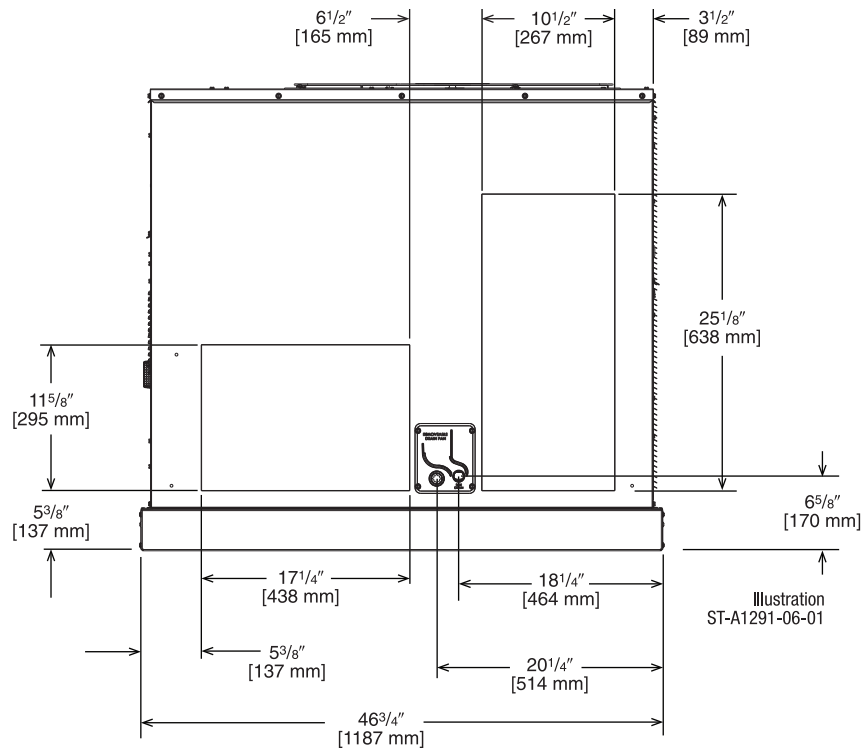



## SUPPLY AND RETURN DIMENSIONS FOR DOWNFLOW APPLICATIONS (BOTTOM VIEW)

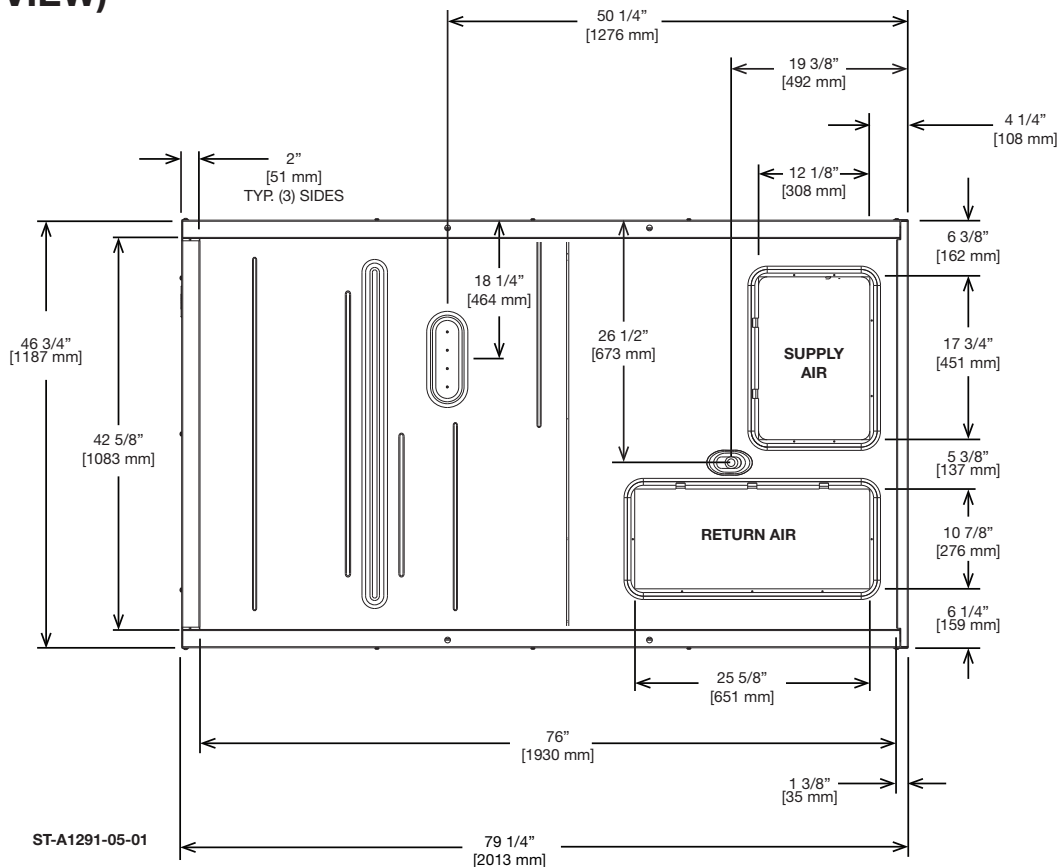

[ ] Designates Metric Conversions

WEIGHTS

| Capacity Tons [kW]  | Corner Weights by Percentage |     |     |     |
|---------------------|------------------------------|-----|-----|-----|
|                     | A                            | B   | C   | D   |
| 3.0-6.0 [10.6-21.1] | 21%                          | 40% | 12% | 27% |

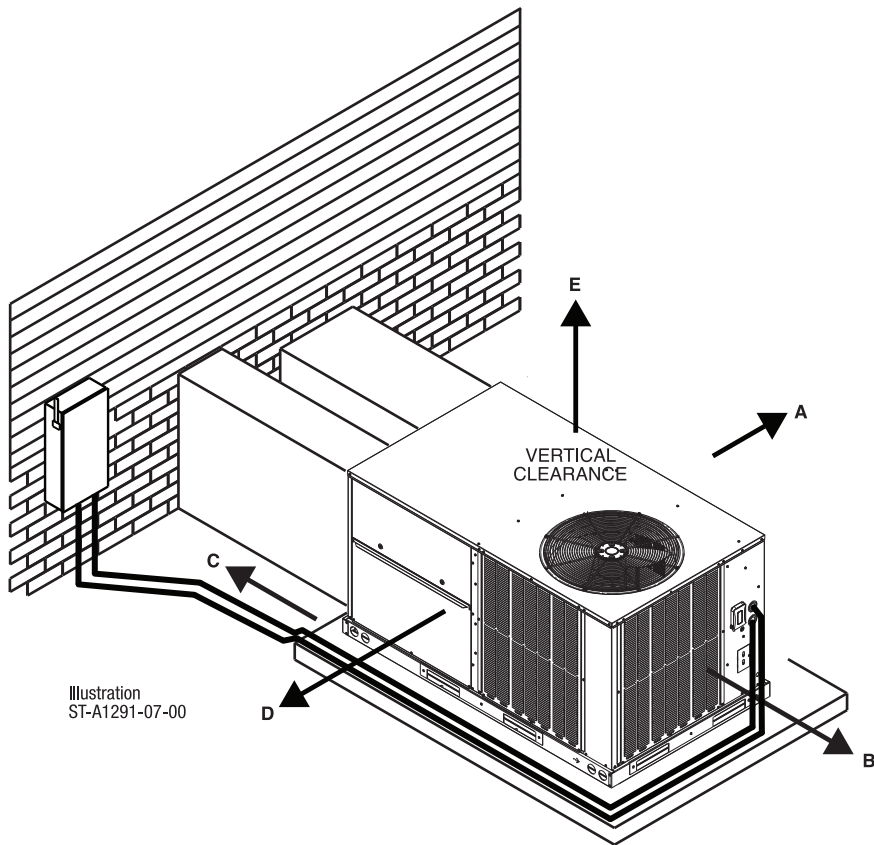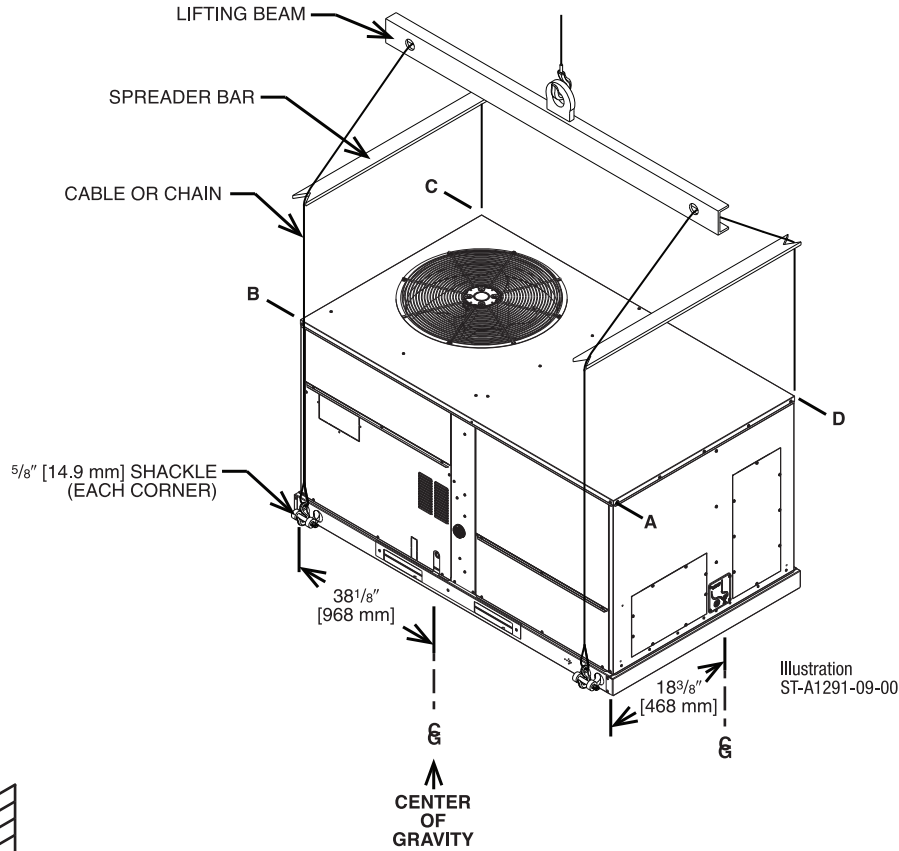

**CLEARANCES**  
THE FOLLOWING MINIMUM CLEARANCES MUST BE OBSERVED FOR PROPER UNIT PERFORMANCE AND SERVICEABILITY.

| RECOMMENDED CLEARANCE In. [mm] | LOCATION          |
|--------------------------------|-------------------|
| 48 [1219]                      | A - FRONT         |
| 24 [609]                       | B - CONDENSER END |
| 48 [1219] ①                    | C - DUCT END      |
| 24 [609] ②                     | *D - FILTER SIDE  |
| 60 [1524]                      | E - ABOVE         |

① 18" [457 mm] MINIMUM IF DRAINPAN WILL NOT BE REMOVED.  
② 48" [1219 mm] MINIMUM IF ECONOMIZER IS INSTALLED.

[ ] Designates Metric Conversions

## FIELD-INSTALLED ACCESSORY EQUIPMENT

| Accessory                                                                                                 | Model Number  | Shipping Weight<br>Lbs. [kg] | Installed Weight<br>Lbs. [kg] | Factory Installation<br>Available? |
|-----------------------------------------------------------------------------------------------------------|---------------|------------------------------|-------------------------------|------------------------------------|
| <b>Economizers</b>                                                                                        |               |                              |                               |                                    |
| DDC Economizer with Single Enthalpy (Downflow)<br><i>MicroMetl Economizer with Honeywell Controller</i>   | RXRD-01MCDBM3 | 100 [45.4]                   | 66 [29.9]                     | No                                 |
| DDC Economizer with Single Enthalpy (Horizontal)<br><i>MicroMetl Economizer with Honeywell Controller</i> | RXRD-01MCHBM3 | 72 [32.7]                    | 69 [31.3]                     | No                                 |
| Non-DDC Economizer with No Controls (Downflow)<br><i>MicroMetl Economizer, Belimo Actuator</i>            | RXRD-31MCDAM3 | 100 [45.4]                   | 66 [29.9]                     | No                                 |
| Non-DDC Economizer with Single Enthalpy (Downflow)<br><i>MicroMetl Economizer with Siemens Controls</i>   | RXRD-11MCDAM3 | 100 [45.4]                   | 66 [29.9]                     | Yes                                |
| Non-DDC Economizer with Single Enthalpy (Downflow)<br><i>RRS Economizer with RRS Basic Controller</i>     | RXRD-41MCDAM3 | 100 [45.4]                   | 66 [29.9]                     | No                                 |
| Non-DDC Economizer with Single Enthalpy (Downflow)<br><i>RRS Economizer with Siemens Controls</i>         | RXRD-51MCDAM3 | 100 [45.4]                   | 66 [29.9]                     | No                                 |
| Non-DDC Economizer with Single Enthalpy (Horizontal)<br><i>MicroMetl Economizer with Siemens Controls</i> | RXRD-11MCHAM3 | 72 [32.7]                    | 69 [31.3]                     | No                                 |
| Non-DDC Economizer with Single Enthalpy (Horizontal)<br><i>RRS Economizer with RRS Basic Controller</i>   | RXRD-41MCHAM3 | 72 [32.7]                    | 69 [31.3]                     | No                                 |
| Non-DDC Economizer with Single Enthalpy (Horizontal)<br><i>RRS Economizer with Siemens Controls</i>       | RXRD-51MCHAM3 | 72 [32.7]                    | 69 [31.3]                     | No                                 |
| Economizer Universal DDC Interface Kit                                                                    | RXRX-DDC01    | 5 [2.7]                      | 3.5 [1.6]                     | Yes <sup>1</sup>                   |

| Accessory                                                                       | Model Number | Shipping Weight<br>Lbs. [kg] | Installed Weight<br>Lbs. [kg] | Factory Installation<br>Available? |
|---------------------------------------------------------------------------------|--------------|------------------------------|-------------------------------|------------------------------------|
| Comfort Alert (1 Phase) DDC                                                     | RXRX-AZ03    | 3 [1.5]                      | 2 [0.9]                       | Yes                                |
| Comfort Alert (1 Phase) Non-DDC                                                 | RXRX-AZ04    | 3 [1.5]                      | 2 [0.9]                       | Yes                                |
| Comfort Alert (3 Phase) DDC                                                     | RXRX-AZ01    | 3 [1.5]                      | 2 [0.9]                       | Yes                                |
| Comfort Alert (3 Phase) Non-DDC                                                 | RXRX-AZ02    | 3 [1.5]                      | 2 [0.9]                       | Yes                                |
| Communication Card, BACnet                                                      | RXRX-AY01    | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Communication Card, LonWorks                                                    | RXRX-AY02    | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Concentric Adapter 3-4 Ton Drop                                                 | RXMC-DC01    | 35 [15.9]                    | 30 [13.6]                     | No                                 |
| Concentric Adapter 5-6 Ton Drop                                                 | RXMC-DC02    | 40 [18.2]                    | 35 [15.9]                     | No                                 |
| Concentric Diffuser 3-4 Ton Drop                                                | RXRN-AED1800 | 35 [15.9]                    | 30 [13.6]                     | No                                 |
| Concentric Diffuser 5-6 Ton Drop                                                | RXRN-AED2000 | 35 [15.9]                    | 30 [13.6]                     | No                                 |
| Concentric Diffuser 3-4 Ton Flush                                               | RXRN-AEF1800 | 30 [13.6]                    | 25 [11.3]                     | No                                 |
| Concentric Diffuser 5-6 Ton Flush                                               | RXRN-AEF2000 | 30 [13.6]                    | 25 [11.3]                     | No                                 |
| Convenience Outlet, Non-Powered                                                 | RXRX-BN01    | 2 [1.0]                      | 1.5 [0.7]                     | Yes                                |
| Dual Enthalpy Kit DDC (for Honeywell DDC)                                       | RXRX-BV02    | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Dual Enthalpy, Temperature and Humidity Sensor<br>(for Ruskin Basic Controller) | PD955977     | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)                    | PD555460     | 1 [0.5]                      | 1 [0.5]                       | No                                 |

<sup>1</sup>When a factory installed economizer is selected in the unit option codes, this accessory is automatically factory installed if required.

[ ] Designates Metric Conversions

## FIELD-INSTALLED ACCESSORY EQUIPMENT (CONTINUED)

| Accessory                                        | Model Number               | Shipping Weight<br>Lbs. [kg] | Installed Weight<br>Lbs. [kg] | Factory Installation<br>Available? |
|--------------------------------------------------|----------------------------|------------------------------|-------------------------------|------------------------------------|
| Electric Heater Kits <sup>2</sup>                | RXJJ-DC10JT                | 10 [4.5]                     | 8 [3.6]                       | Yes                                |
|                                                  | RXJJ-DC15JT                | 13 [5.9]                     | 11 [5.0]                      | Yes                                |
|                                                  | RXJJ-DC20JT                | 14 [6.4]                     | 12 [5.4]                      | Yes                                |
|                                                  | RXJJ-DC10CP                | 10 [4.5]                     | 8 [3.6]                       | Yes                                |
|                                                  | RXJJ-DC15CP                | 13 [5.9]                     | 11 [5.0]                      | Yes                                |
|                                                  | RXJJ-DC20CP                | 14 [6.4]                     | 12 [5.4]                      | Yes                                |
|                                                  | RXJJ-DC24CP                | 14 [6.4]                     | 12 [5.4]                      | Yes                                |
|                                                  | RXJJ-DC10DNV               | 10 [4.5]                     | 8 [3.6]                       | Yes                                |
|                                                  | RXJJ-DC15DNV               | 13 [5.9]                     | 11 [5.0]                      | Yes                                |
|                                                  | RXJJ-DC20DNV               | 14 [6.4]                     | 12 [5.4]                      | Yes                                |
|                                                  | RXJJ-DC24DNV               | 14 [6.4]                     | 12 [5.4]                      | Yes                                |
|                                                  | RXJJ-DC10Y                 | 10 [4.5]                     | 8 [3.6]                       | No                                 |
|                                                  | RXJJ-DC15Y                 | 13 [5.9]                     | 11 [5.0]                      | No                                 |
|                                                  | RXJJ-DC20Y                 | 14 [6.4]                     | 12 [5.4]                      | No                                 |
|                                                  | RXJJ-DC24Y                 | 14 [6.4]                     | 12 [5.4]                      | No                                 |
| Freeze Stat Kit                                  | RXXR-AM05                  | 2 [1.0]                      | 1.5 [0.7]                     | Yes                                |
| Fresh Air Damper, Manual                         | RXRF-ACA1                  | 22 [10.0]                    | 18 [8.2]                      | No                                 |
| Fresh Air Damper, Motorized                      | RXRF-ACB1                  | 53 [24.0]                    | 43 [19.5]                     | No                                 |
| Low-Ambient Control Kit                          | RXRZ-A04                   | 4 [1.8]                      | 3 [1.4]                       | Yes                                |
| MERV 8 Filter                                    | RXMF-M08A21616             | 2 [0.9]                      | 1 [0.45]                      | No                                 |
| MERV 13 Filter                                   | RXMF-M13A21616             | 2 [0.9]                      | 1 [0.45]                      | No                                 |
| Outdoor Coil Louver Kit                          | RXXR-ADD04C                | 30 [13.6]                    | 25 [11.3]                     | Yes                                |
| Power Exhaust (230V) Vertical <i>MicroMetl</i>   | RXXR-CCF02C                | 24 [10.9]                    | 21 [9.5]                      | No                                 |
| Power Exhaust (460V) Vertical <i>MicroMetl</i>   | RXXR-CCF02D                | 20 [9.1]                     | 17 [7.7]                      | No                                 |
| Power Exhaust (230V) Horizontal <i>MicroMetl</i> | RXXR-CCF03C                | 42 [19.1]                    | 39 [17.7]                     | No                                 |
| Power Exhaust (460V) Horizontal <i>MicroMetl</i> | RXXR-CCF03D                | 42 [19.1]                    | 39 [17.7]                     | No                                 |
| Power Exhaust (230V) Vertical <i>RRS</i>         | RXXR-RCF02C                | 24 [10.9]                    | 21 [9.5]                      | No                                 |
| Power Exhaust (460V) Vertical <i>RRS</i>         | RXXR-RCF02D                | 20 [9.1]                     | 17 [7.7]                      | No                                 |
| Power Exhaust (575V) Vertical <i>RRS</i>         | RXXR-RCF02Y                | 20 [9.1]                     | 17 [7.7]                      | No                                 |
| Power Exhaust (230V) Horizontal <i>RRS</i>       | RXXR-RCF03C                | 42 [19.1]                    | 39 [17.7]                     | No                                 |
| Power Exhaust (460V) Horizontal <i>RRS</i>       | RXXR-RCF03D                | 42 [19.1]                    | 39 [17.7]                     | No                                 |
| Power Exhaust (575V) Horizontal <i>RRS</i>       | RXXR-RCF03Y                | 42 [19.1]                    | 39 [17.7]                     | No                                 |
| Roofcurb, 14"                                    | RXKG-DCC14                 | 94 [42.6]                    | 90 [40.8]                     | No                                 |
| Roofcurb, 14" Welded                             | RXKG-DC14                  | 94 [42.6]                    | 90 [40.8]                     | No                                 |
| Roofcurb, 24"                                    | RXKG-DCC24                 | 124 [56.2]                   | 120 [54.4]                    | No                                 |
| Roofcurb, 24" Welded                             | RXKG-DC24                  | 124 [56.2]                   | 120 [54.4]                    | No                                 |
| Roofcurb Adapter                                 | RXXR-DCCAE                 | 159 [72.1]                   | 145 [65.8]                    | No                                 |
| Sensor, Carbon Dioxide (Wall Mount)              | RXXR-AR02                  | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Sensor, Room Humidity                            | RHC-ZNS4                   | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Sensor, Room Temperature and Relative Humidity   | RHC-ZNS5                   | 1 [0.5]                      | 1 [0.5]                       | No                                 |
| Single Point Wiring Kits                         | RXJX-AJ0601 (Single Phase) | 20 [9.1]                     | 17 [7.7]                      | No                                 |
|                                                  | RXJX-AZ0601 (Three Phase)  | 23 [10.4]                    | 20 [9.1]                      | No                                 |
| Smoke Detector, Return (Field kit)               | RXXR-BS01                  | 7 [3.2]                      | 6 [2.7]                       | No                                 |
| Smoke Detector, Return/ Supply (Field kit)       | RXXR-BS02                  | 5 [2.3]                      | 4 [1.8]                       | No                                 |
| Unfused Service Disconnect                       | RXXR-BP01                  | 10 [4.5]                     | 9 [4.1]                       | Yes                                |
| UV-C Kit 208V/230V                               | RXXR-UVC22C                | 8 [3.6]                      | 6 [2.7]                       | No                                 |
| UV-C Transformer 460V/575V                       | RXXR-UVCTC                 | 12 [5.4]                     | 11 [5.0]                      | No                                 |

<sup>2</sup>10kW options not available on 6 Ton models.

[ ] Designates Metric Conversions

## COMMUNICATION CARDS



### **BACnet COMMUNICATION CARD      RXRX-AY01**

The field-installed BACnet Communication Card allows the RTU-C unit controller to communicate with a third party building management system that supports the BACnet Application Specific Controller device profile. The BACnet Communication Module plugs onto the unit RTU-C controller and allows communication between the RTU-C and the BACnet MSTP network.



### **LonWorks COMMUNICATION CARD      RXRX-AY02**

The field-installed LonWorks Communication Card allows the RTU-C unit controller to communicate with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile. The LonMark Communication Module plugs onto the RTU-C controller and allows communication between the RTU-C and a LonWorks Network.

## **ELECTRIC HEAT AND SINGLE POINT WIRING**

The field or factory electric heater kits are available in 10, 15 and 20 kW heating inputs, and for both single and 3-phase applications. The single point wiring kit is only available as a field installation accessory for units using electric heat.


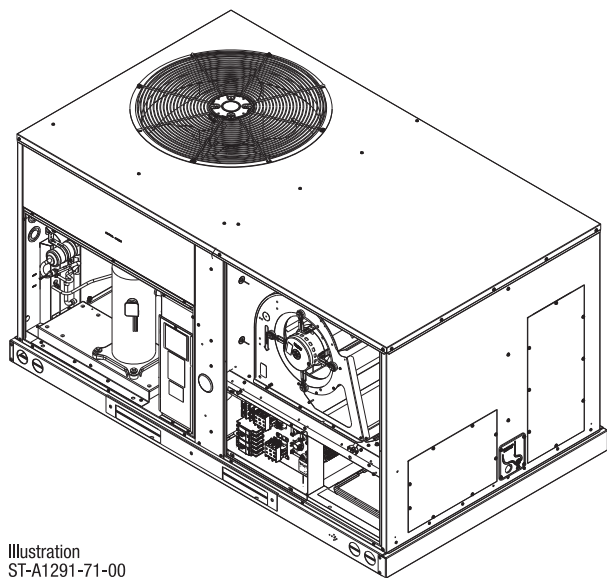



Illustration  
ST-A1291-71-00

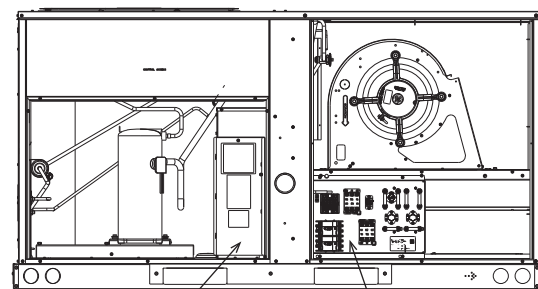

SINGLE POINT WIRING BOX


ELECTRIC HEATER KIT

DOWNFLOW TRANSITION DRAWINGS

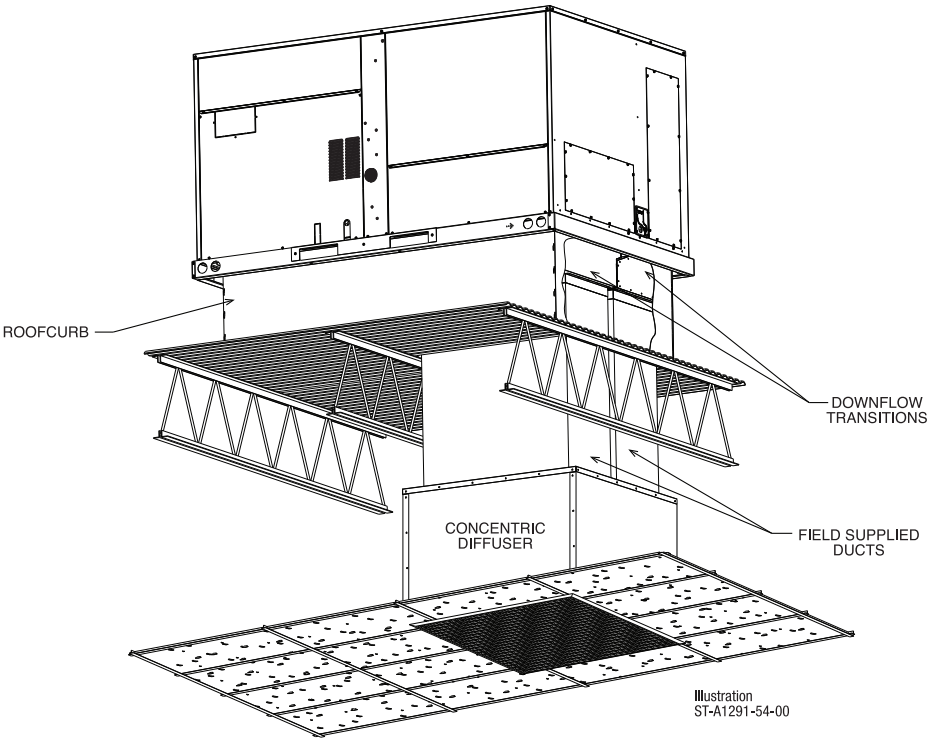

RXMC-DC01 – Concentric Adapter 3 & 4 Ton Drop

- Used with RXRN-AEF1800 or RXRN-AED1800 Concentric Diffusers

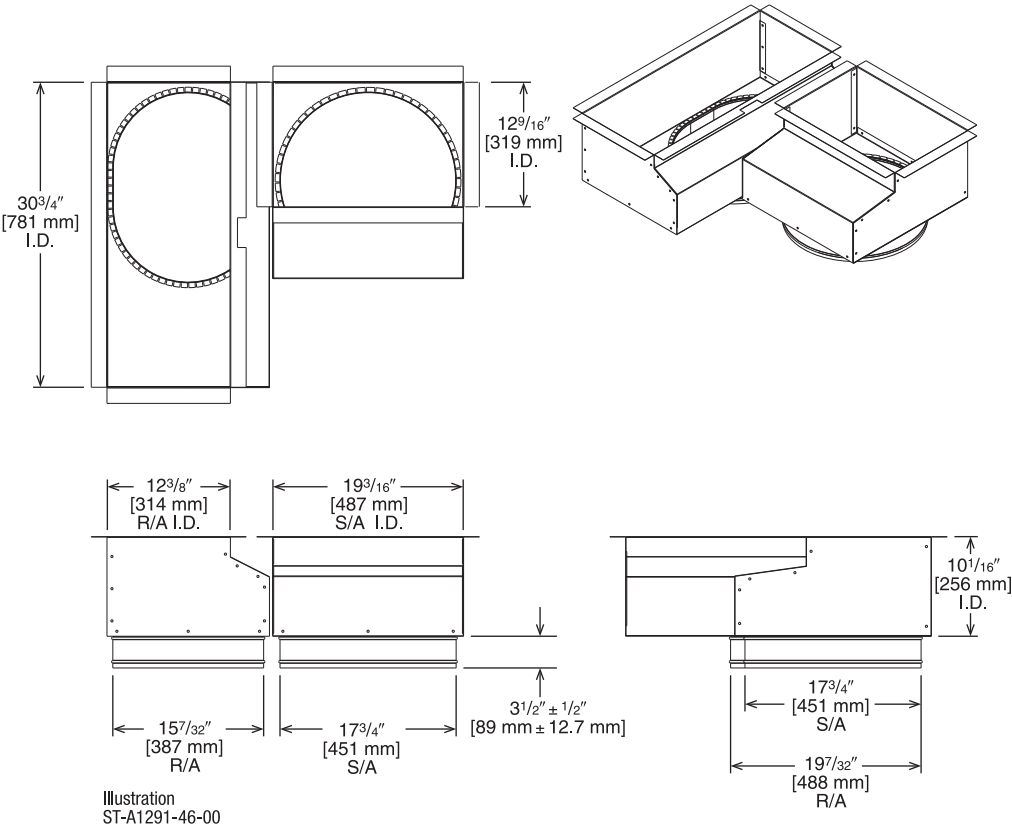

[ ] Designates Metric Conversions

## DOWNFLOW TRANSITION DRAWINGS

### RXMC-DC02—Concentric Adapter 5 & 6 Ton Drop

- Used with RXRN-AEF2000 or RXRN-AED2000 Concentric Diffusers

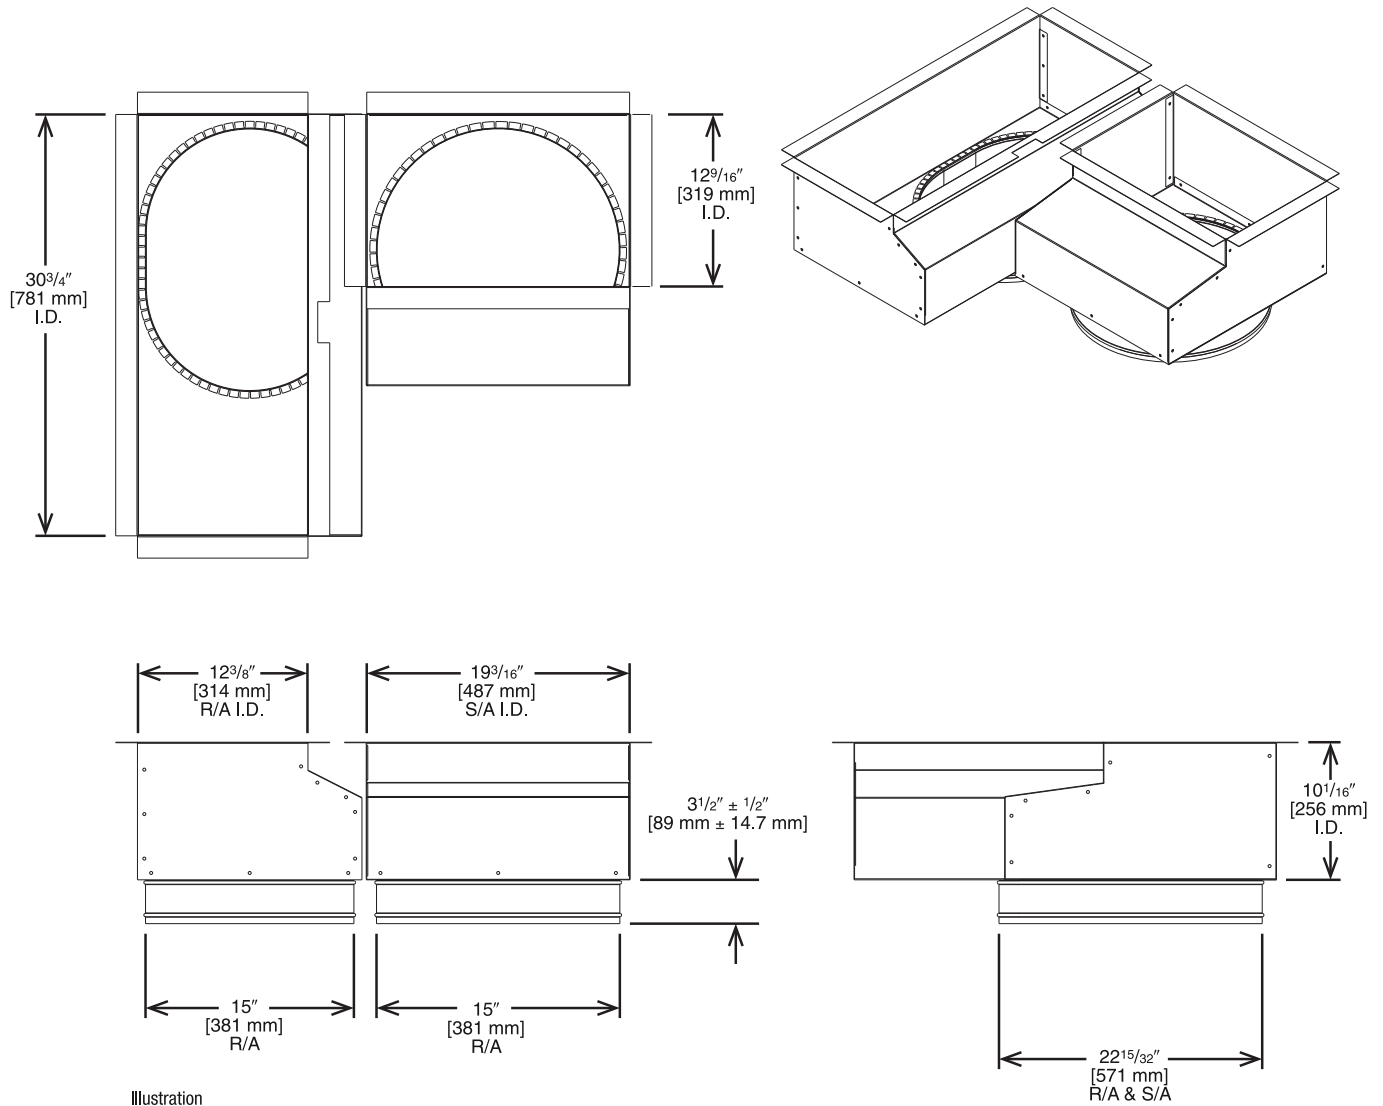


Illustration  
ST-A1291-47-00


[ ] Designates Metric Conversions

CONCENTRIC DIFFUSER—3 & 4 TON DROP

RXRN-AED1800

For Use With Downflow Transition (RXMC-DC01)  
and 18" [457 mm] Round Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

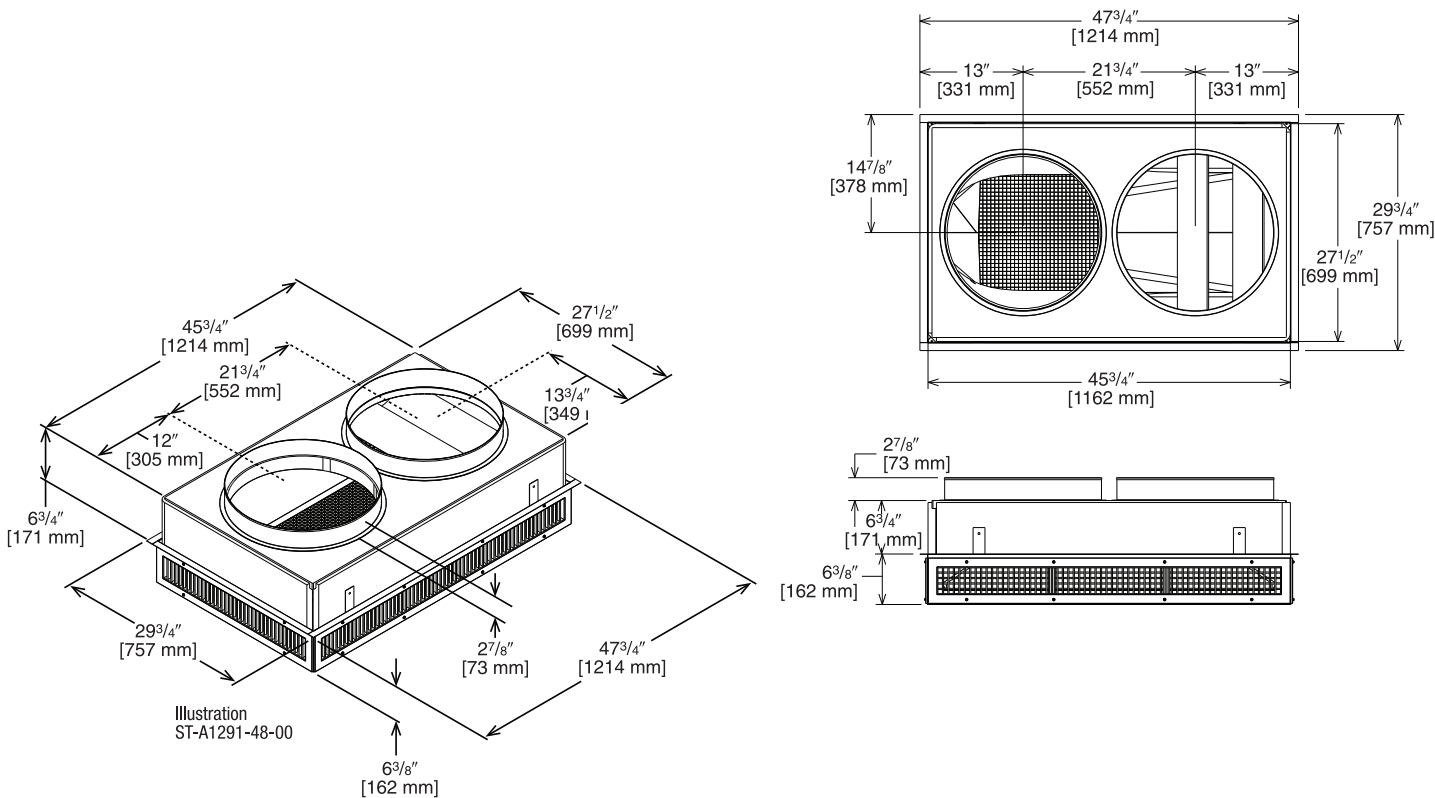

ENGINEERING DATA<sup>①</sup>

| Model No.    | Flow Rate<br>CFM [L/s] | Throw <sup>②</sup> <sup>③</sup><br>Feet [m] | Neck Velocity<br>fpm [m/s] | Noise Level <sup>④</sup><br>(dbA) |
|--------------|------------------------|---------------------------------------------|----------------------------|-----------------------------------|
| RXRN-AED1800 | 1000 [472]             | 9-23 [2.7-7.0]                              | 391 [2.0]                  | 12                                |
|              | 1200 [566]             | 10-24 [3.0-7.3]                             | 469 [2.4]                  | 15                                |
|              | 1400 [661]             | 12-26 [3.7-7.9]                             | 547 [2.8]                  | 19                                |
|              | 1600 [755]             | 13-28 [4.0-8.5]                             | 625 [3.2]                  | 21                                |
|              | 1800 [849]             | 15-30 [4.6-9.1]                             | 703 [3.6]                  | 26                                |
|              | 2000 [944]             | 17-32 [5.2-9.8]                             | 781 [4.0]                  | 30                                |
|              | 2400 [1133]            | 19-34 [5.8-10.4]                            | 859 [5.8]                  | 32                                |

NOTES: <sup>①</sup> All data is based on the air diffusion council guidelines.  
<sup>②</sup> Throw data is based on 75 FPM Terminal Velocities using isothermal air.  
<sup>③</sup> Throw is based on diffuser blades being directed in a straight pattern.  
<sup>④</sup> Actual noise levels may vary due to duct design and do not include transmitted unit noise.  
Adequate duct attenuation must be provided to reduce sound output from the unit.

[ ] Designates Metric Conversions




## CONCENTRIC DIFFUSER—5 & 6 TON DROP

RXRN-AED2000

For Use With Downflow Transition (RXMC-DC02)  
and 20" [508 mm] Round Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

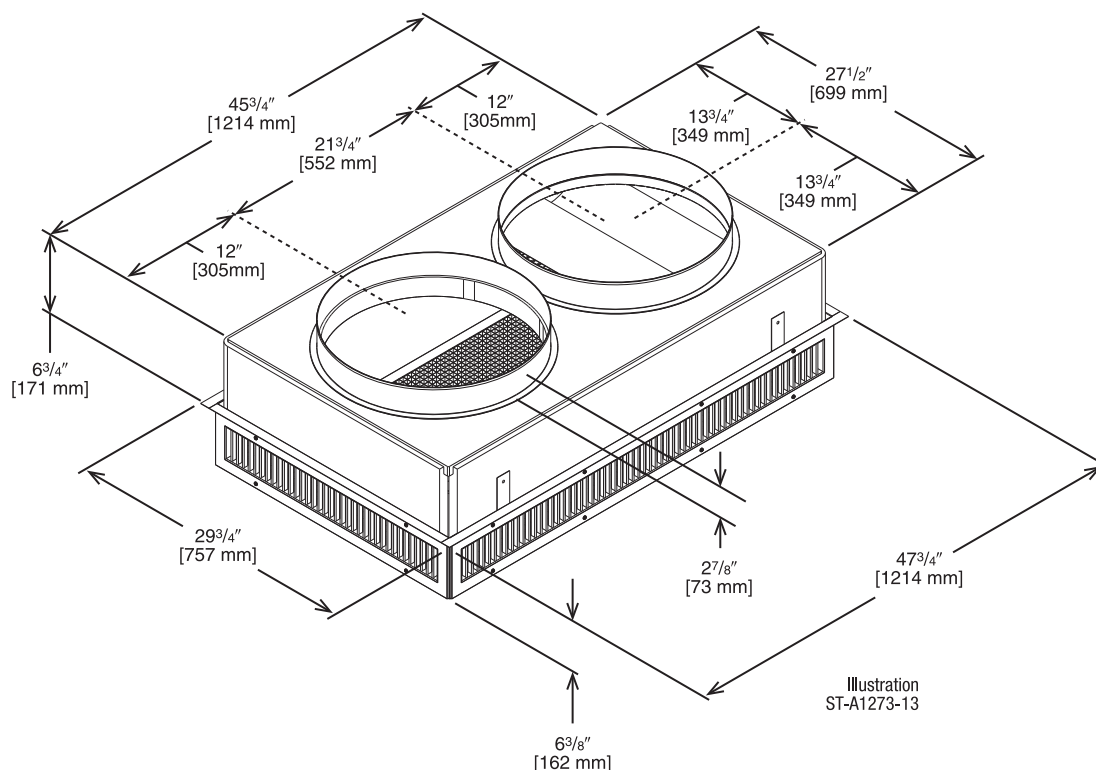

## ENGINEERING DATA<sup>①</sup>

| Model No.    | Flow Rate<br>CFM [L/s] | Throw <sup>②</sup> <sup>③</sup><br>Feet [m] | Neck Velocity<br>fpm [m/s] | Noise Level <sup>④</sup><br>(dbA) |
|--------------|------------------------|---------------------------------------------|----------------------------|-----------------------------------|
| RXRN-AED2000 | 2600 [1222]            | 22-39 [6.7-11.9]                            | 669 [3.4]                  | 32                                |
|              | 2800 [1316]            | 23-40 [7.1-12.2]                            | 720 [3.7]                  | 38                                |
|              | 3000 [1410]            | 25-42 [7.6-12.8]                            | 772 [3.9]                  | 40                                |
|              | 3200 [1504]            | 26-43 [7.9-13.1]                            | 823 [4.2]                  | 41                                |
|              | 3400 [1598]            | 27-45 [8.2-13.7]                            | 874 [4.4]                  | 42                                |

**NOTES:** <sup>①</sup> All data is based on the air diffusion council guidelines.

<sup>②</sup> Throw data is based on 75 FPM Terminal Velocities using isothermal air.

<sup>③</sup> Throw is based on diffuser blades being directed in a straight pattern.

<sup>④</sup> Actual noise levels may vary due to duct design and do not include transmitted unit noise.  
Adequate duct attenuation must be provided to reduce sound output from the unit.

[ ] Designates Metric Conversions

CONCENTRIC DIFFUSER—3 & 4 TON FLUSH

RXRN-AEF1800

For Use With Downflow Transition (RXMC-DC01)  
18" [457 mm] Round Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

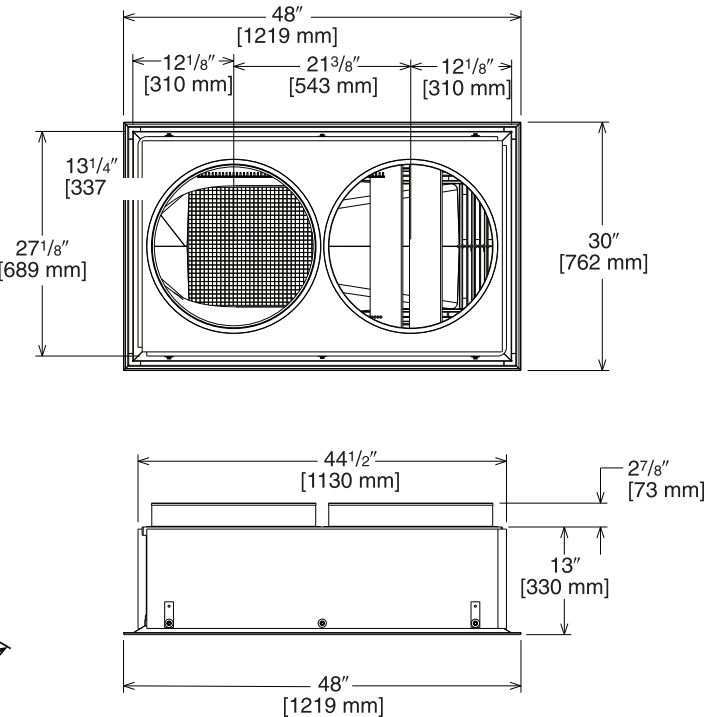
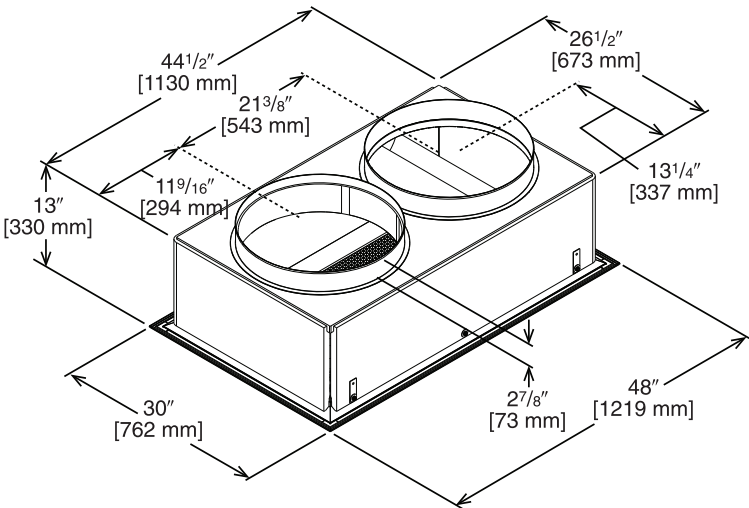


Illustration  
ST-A1291-49-00

ENGINEERING DATA<sup>①</sup>

| Model No.    | Flow Rate<br>CFM [L/s] | Throw <sup>②</sup> <sup>③</sup><br>Feet [m] | Neck Velocity<br>fpm [m/s] | Noise Level <sup>④</sup><br>(dbA) |
|--------------|------------------------|---------------------------------------------|----------------------------|-----------------------------------|
| RXRN-AEF1800 | 1000 [472]             | 9-12 [2.7-3.7]                              | 663 [3.4]                  | 20                                |
|              | 1200 [566]             | 12-16 [3.7-4.9]                             | 714 [3.6]                  | 25                                |
|              | 1400 [661]             | 15-20 [4.6-6.1]                             | 765 [3.9]                  | 30                                |
|              | 1600 [755]             | 17-23 [5.2-7]                               | 816 [4.1]                  | 30                                |
|              | 1800 [849]             | 20-26 [6.1-7.9]                             | 867 [4.4]                  | 35                                |
|              | 2000 [944]             | 22-29 [6.7-8.8]                             | 918 [4.7]                  | 40                                |
|              | 2400 [1133]            | 25-32 [7.6-9.8]                             | 969 [4.9]                  | 45                                |

- NOTES: <sup>①</sup> All data is based on the air diffusion council guidelines.  
<sup>②</sup> Throw data is based on 75 FPM Terminal Velocities using isothermal air.  
<sup>③</sup> Throw is based on diffuser blades being directed in a straight pattern.  
<sup>④</sup> Actual noise levels may vary due to duct design and do not include transmitted unit noise.  
Adequate duct attenuation must be provided to reduce sound output from the unit.

[ ] Designates Metric Conversions

## CONCENTRIC DIFFUSER—5 & 6 TON FLUSH

RXRN-AEF2000

For Use With Downflow Transition (RXMC-DC02)  
20" [508 mm] Round Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

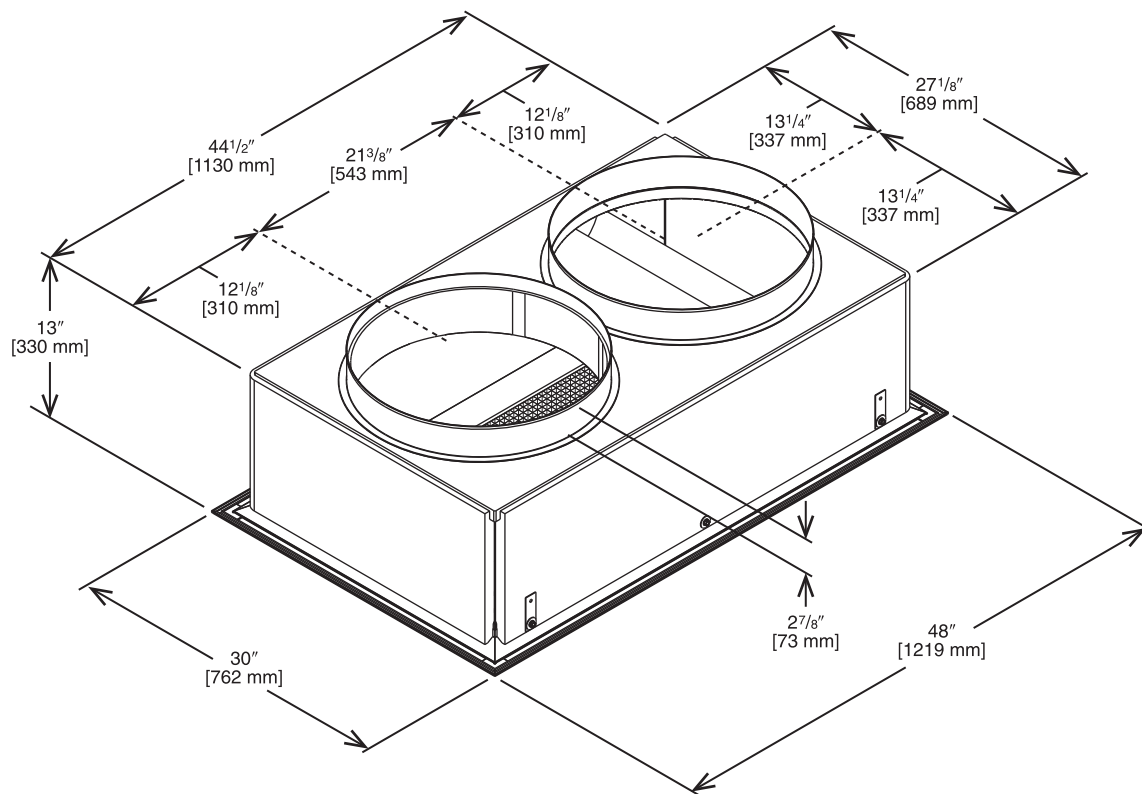


Illustration  
ST-A1273-14-00

## ENGINEERING DATA<sup>①</sup>

| Model No.    | Flow Rate<br>CFM [L/s] | Throw <sup>②</sup> <sup>③</sup><br>Feet [m] | Neck Velocity<br>fpm [m/s] | Noise Level <sup>④</sup><br>(dbA) |
|--------------|------------------------|---------------------------------------------|----------------------------|-----------------------------------|
| RXRN-AEF2000 | 2600 [1222]            | 17-24 [5.2-7.3]                             | 663 [3.4]                  | 30                                |
|              | 2800 [1316]            | 18-28 [5.5-8.5]                             | 714 [3.6]                  | 35                                |
|              | 3000 [1410]            | 20-30 [6.1-9.1]                             | 765 [3.9]                  | 35                                |
|              | 3200 [1504]            | 22-33 [6.7-10.1]                            | 816 [4.1]                  | 40                                |
|              | 3400 [1598]            | 23-37 [7-11.3]                              | 867 [4.4]                  | 40                                |

NOTES: <sup>①</sup> All data is based on the air diffusion council guidelines.

<sup>②</sup> Throw data is based on 75 FPM Terminal Velocities using iso thermal air.

<sup>③</sup> Throw is based on diffuser blades being directed in a straight pattern.

<sup>④</sup> Actual noise levels may vary due to duct design and do not include transmitted unit noise.  
Adequate duct attenuation must be provided to reduce sound output from the unit.

[ ] Designates Metric Conversions

## DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) MICROMETL ECONOMIZER WITH HONEYWELL CONTROLLER



### Field-Installed Only

**RXRD-01MCDBM3**

**RRX-BV02—Dual Enthalpy Kit DDC (for Honeywell DDC)**

**RRX-AR02—Sensor, Carbon Dioxide (Wall Mount)**

- Features **Honeywell** Controls
- Available Factory-Installed or Field Accessory
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Available
- CO<sub>2</sub> Input Sensor Option Available
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is Available from Prostock
- Field-Installed Power Exhaust Option Available
- Prewired for Smoke Detector
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to a thermostat, all economizer functions can be viewed on 16 x 2 LCD screen

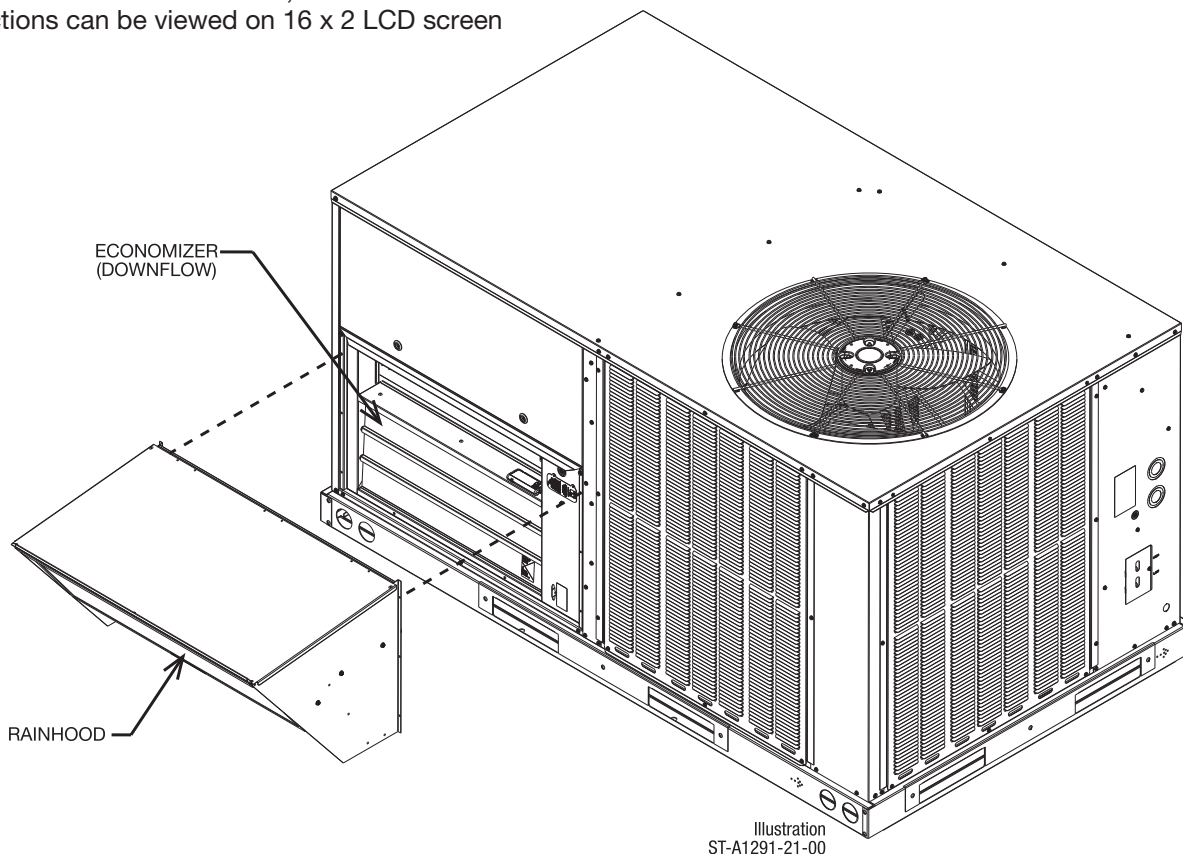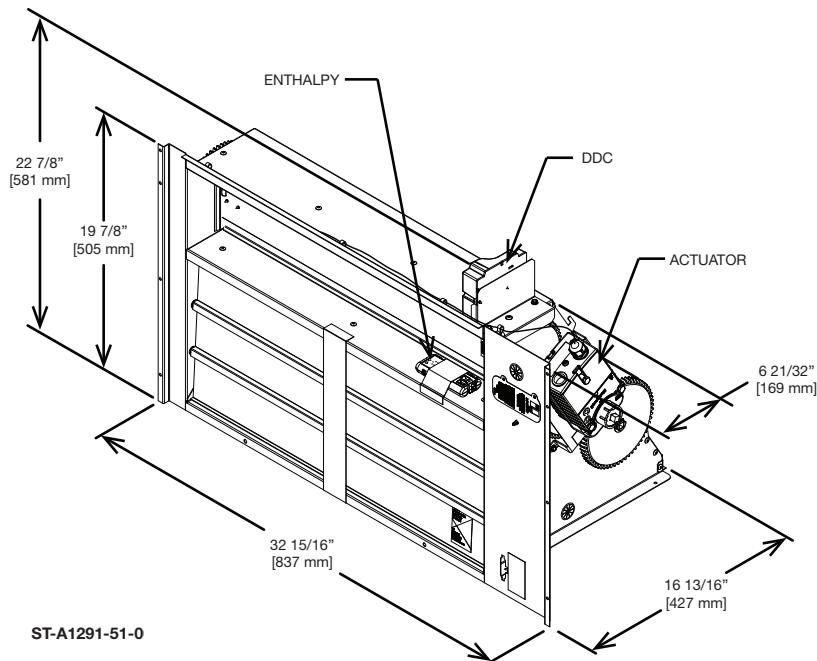

[ ] Designates Metric Conversions

# DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) MICROMETL ECONOMIZER WITH HONEYWELL CONTROLLER



## Field-Installed Only

RXRD-01MCHBM3

RXXRX-BV02—Dual Enthalpy Kit DDC (for Honeywell DDC)

RXXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Honeywell** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Available
- CO<sub>2</sub> Input Sensor Option Available
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Horizontal Duct Application
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is Available from Prostock
- Field Installed Power Exhaust Option Available
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to a thermostat, all economizer functions can be viewed on 16 x 2 LCD screen

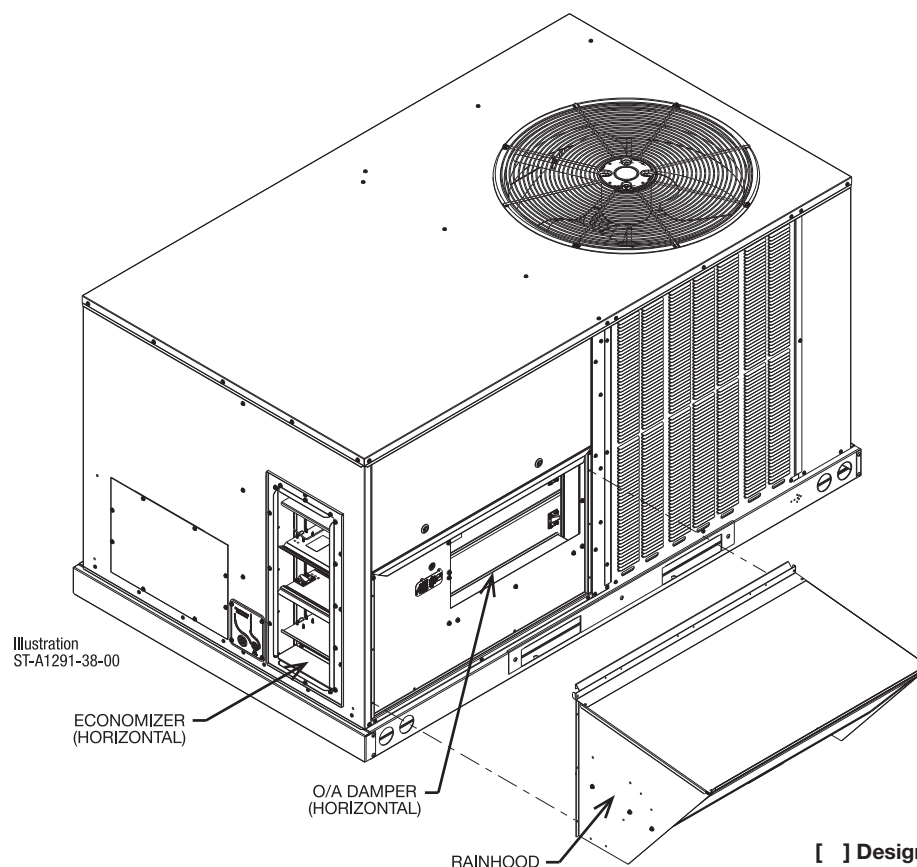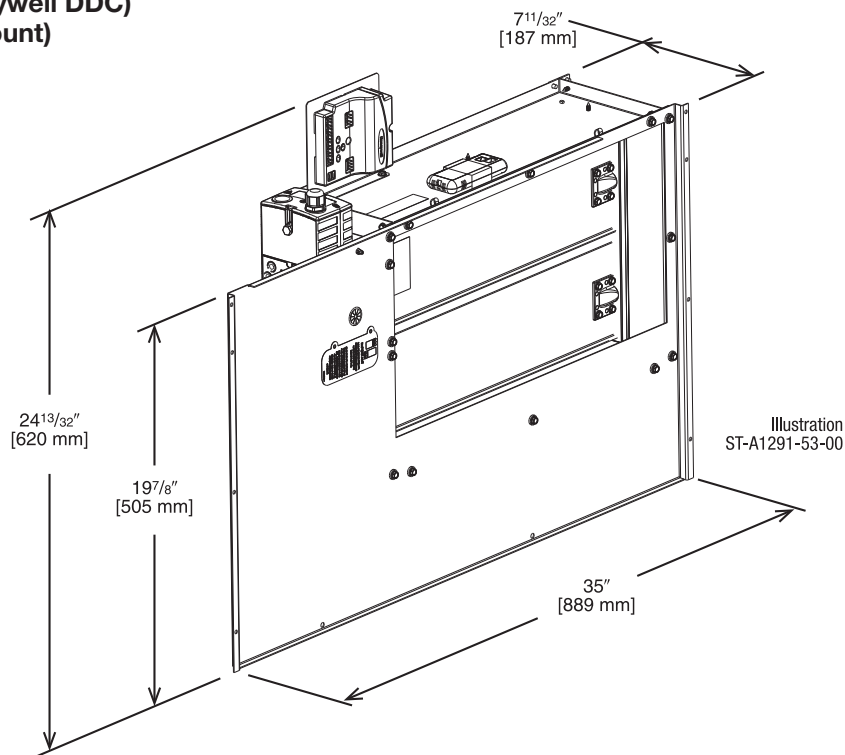

[ ] Designates Metric Conversions





## NON-DDC ECONOMIZER WITH NO CONTROLS (DOWNFLOW) MICROMETL ECONOMIZER, BELIMO ACTUATOR

### Field-Installed Only

#### RXRD-31MCDAM3

#### RXR-ACD01 – Wire Harness for Non-DDC Generic Economizers

- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- AMCA 511 Certified Class 1A Leakage—1" WG of differential pressure tested to AMCA Standard 500-D
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin Electrical Connections
- Standard Barometric Relief Damper
- Controller and Sensors to be determined by Customer
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Field-Installed Power Exhaust Option
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXR-DDC01)

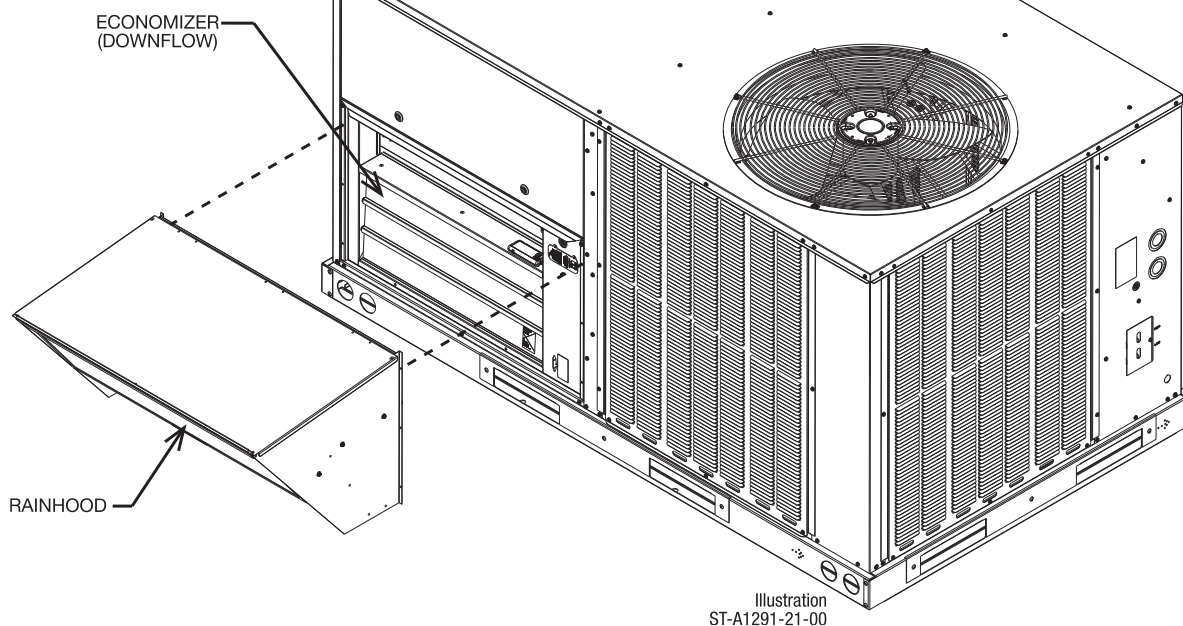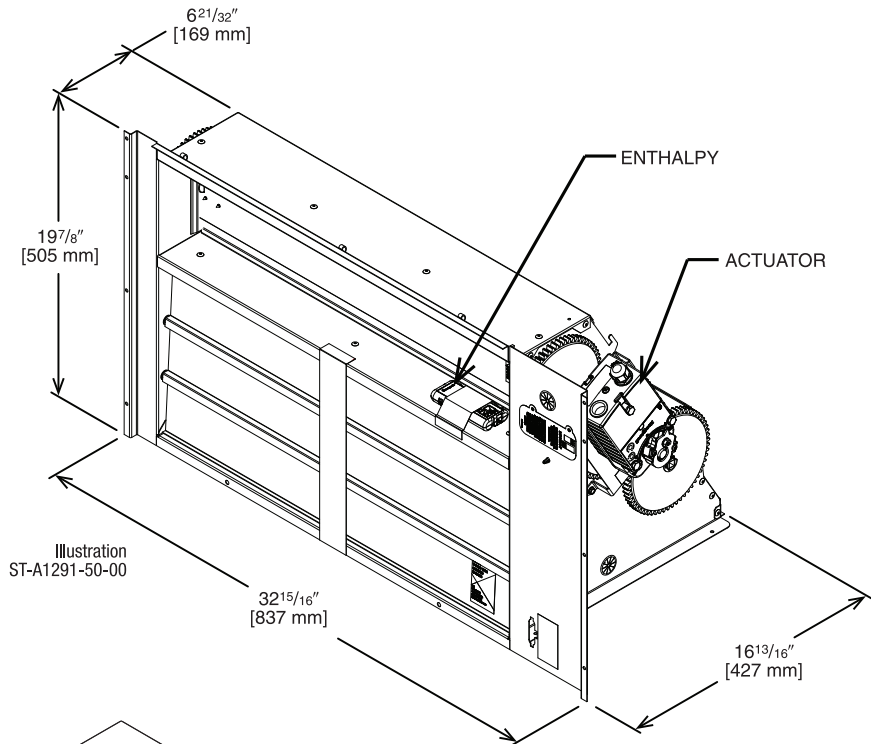

[ ] Designates Metric Conversions

# NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) MICROMETL ECONOMIZER WITH SIEMENS CONTROLS



Factory or Field-Installed

RXRD-11MCDAM3

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

PD555460—Temperature and Humidity Sensor for Dual Enthalpy (for Siemens Controllers Only)

- Features **Siemens** Climatix ECO® Economizer Controller
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- AMCA 511 Certified Class 1A Leakage—1" WG of differential pressure tested to AMCA Standard 500-D
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin Electrical Connections
- Standard Barometric Relief Damper
- Single Enthalpy or Dry Bulb with Return Air Enthalpy Option
- CO<sub>2</sub> Input Sensor Option Available
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Field-Installed Power Exhaust Option Available
- Fault detection and diagnostics
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01)

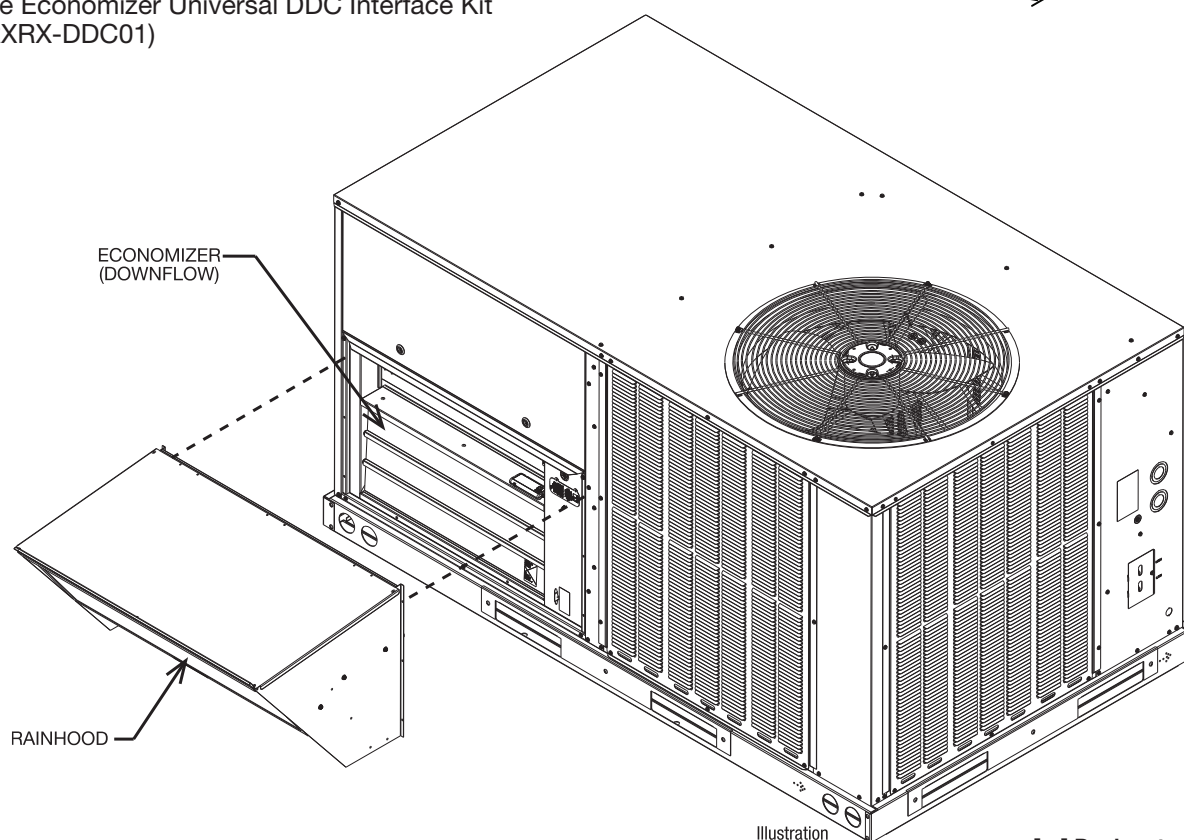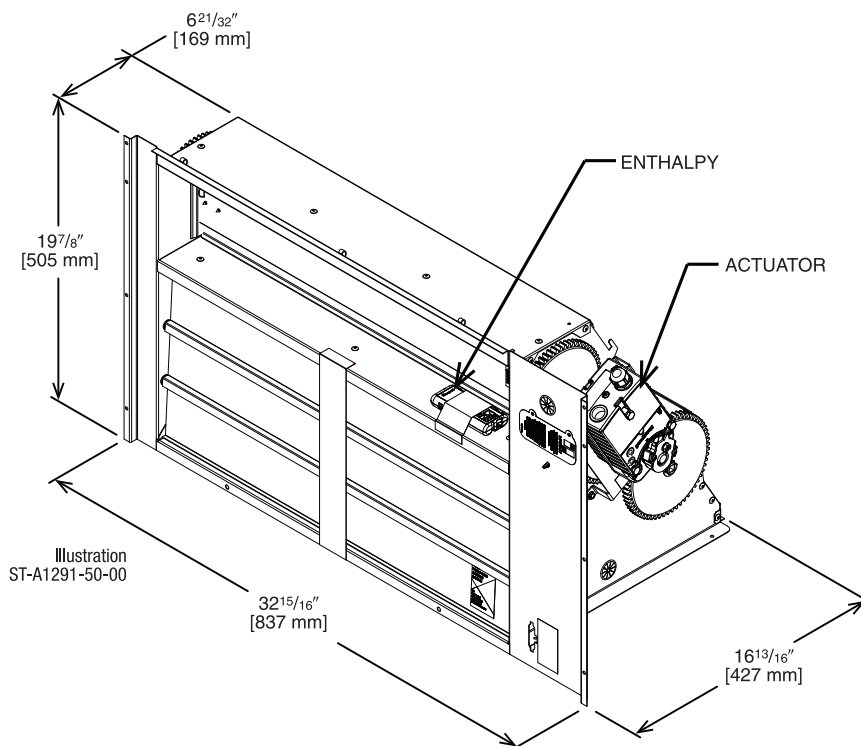

[ ] Designates Metric Conversions

## NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) RRS ECONOMIZER WITH RRS BASIC CONTROLLER

### Field-Installed Only


**RXRD-41MCDAM3**

**PD955977 — Temperature and Humidity Sensor for Dual Enthalpy (for Ruskin Basic Controller Only)**

**RRX-AR02 — Sensor, Carbon Dioxide (Wall Mount)**

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide.
3. Blade edge seals shall be Ruskiprene type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01).

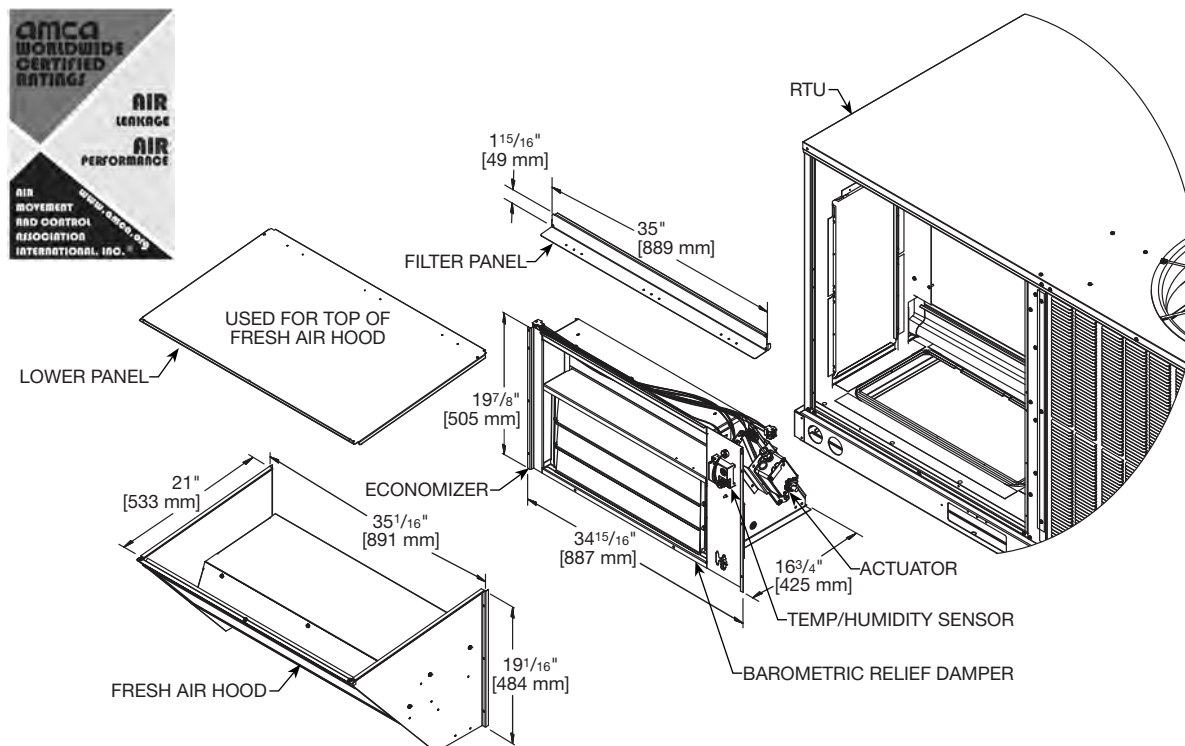

[ ] Designates Metric Conversions



## NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) RRS ECONOMIZER WITH SIEMENS CONTROLS

### Field-Installed Only


RXRD-51MCDAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)

RXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide.
3. Blade edge seals shall be Ruskiprene type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. Controls feature the Siemens controller and actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01).

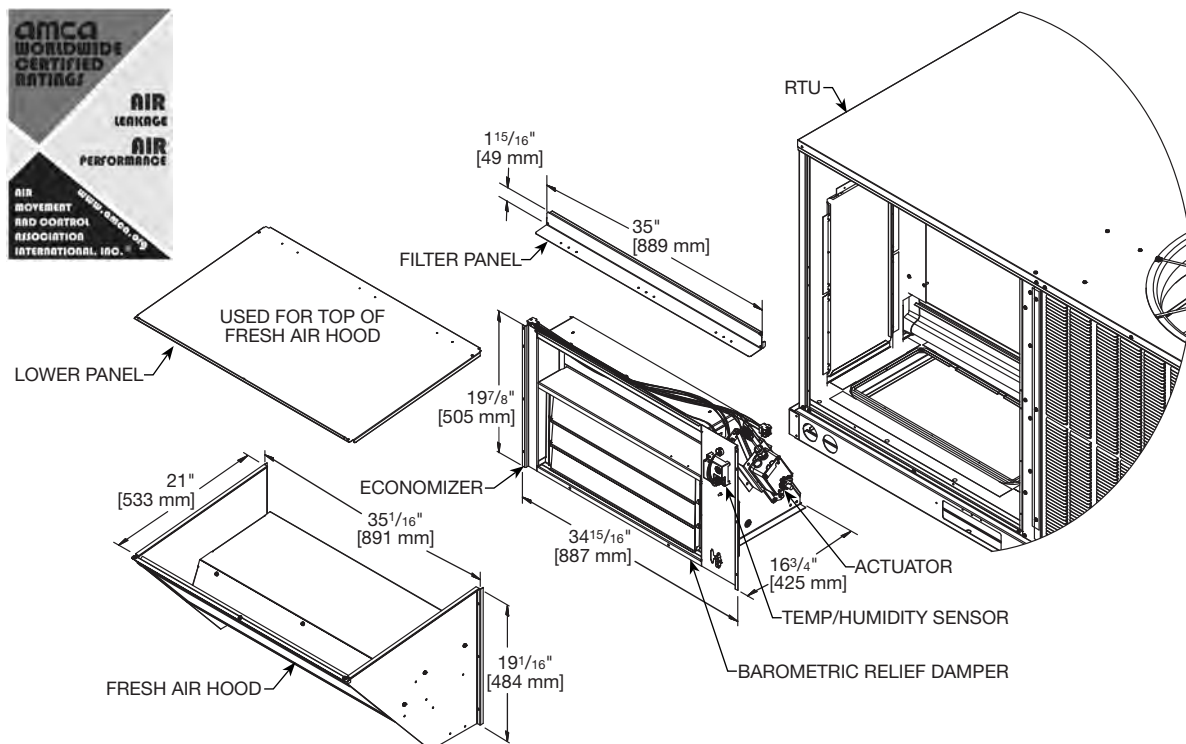

[ ] Designates Metric Conversions

## NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) MICROMETL ECONOMIZER WITH SIEMENS CONTROLS



### Field-Installed Only

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)

RXRD-11MCHAM3

RXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Siemens** Climatix ECO Economizer Controller
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Available
- CO<sub>2</sub> Input Sensor Option Available
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Horizontal Duct Application
- Field-Installed Power Exhaust Option Available
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01)

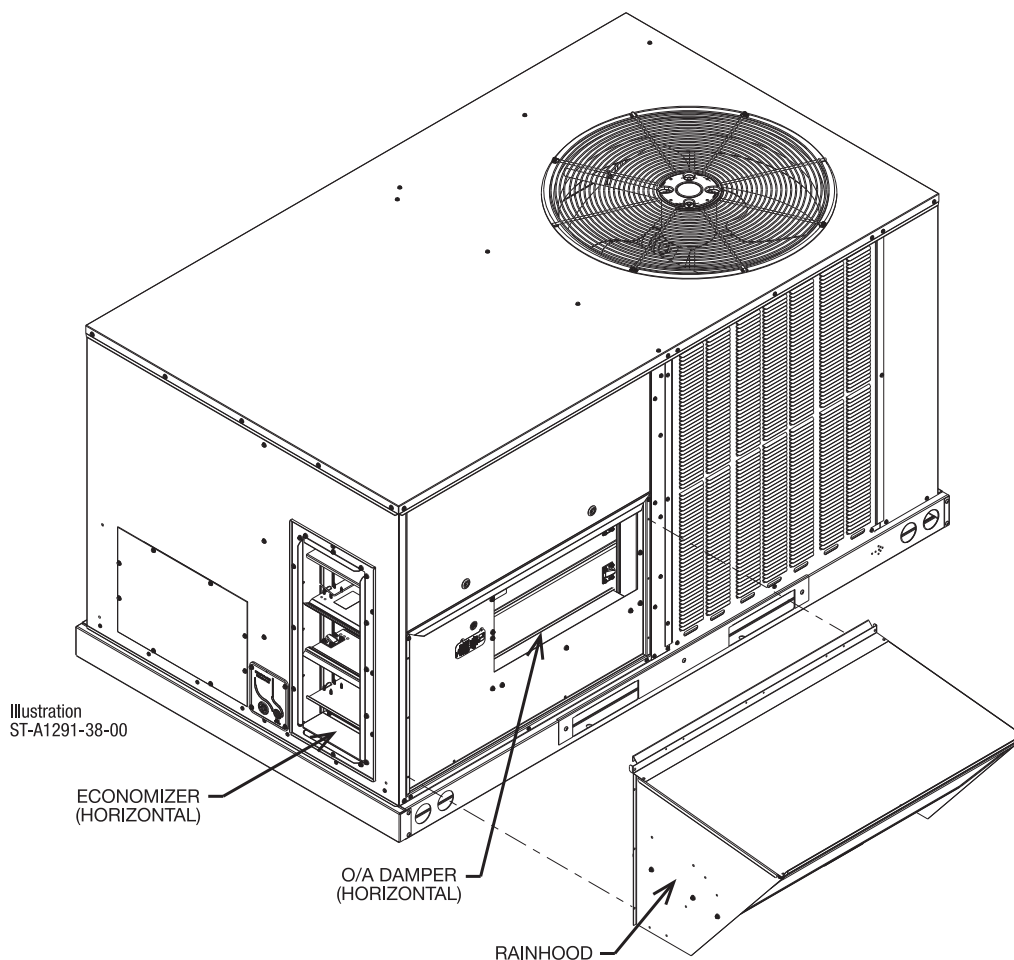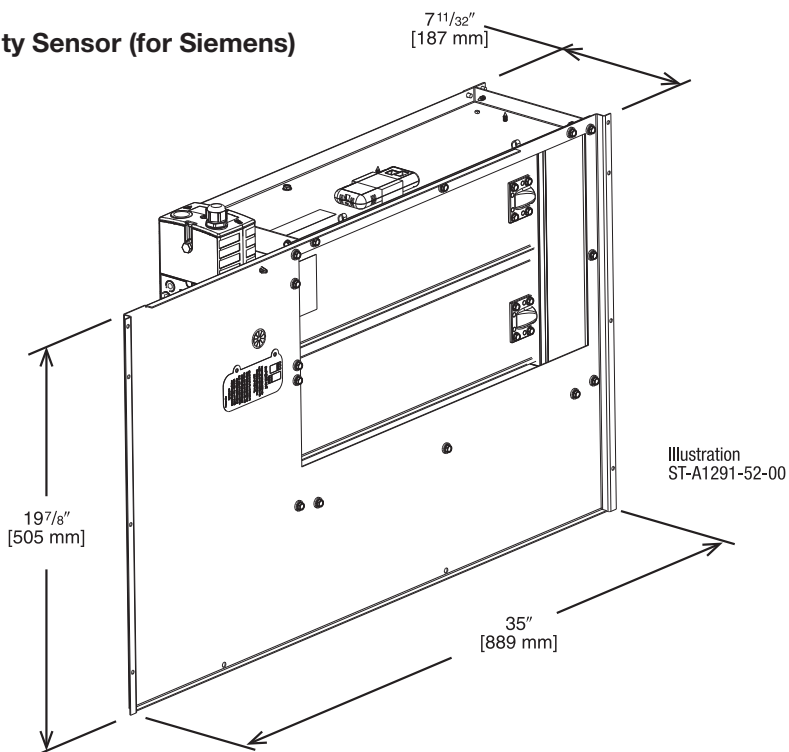

[ ] Designates Metric Conversions

## NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) RRS ECONOMIZER WITH RRS BASIC CONTROLLER

### Field-Installed Only


RXRD-41MCHAM3

PD955977—Temperature and Humidity Sensor for Dual Enthalpy (for Ruskin Basic Controller Only)

RXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide.
3. Blade edge seals shall be Ruskiprene type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01).

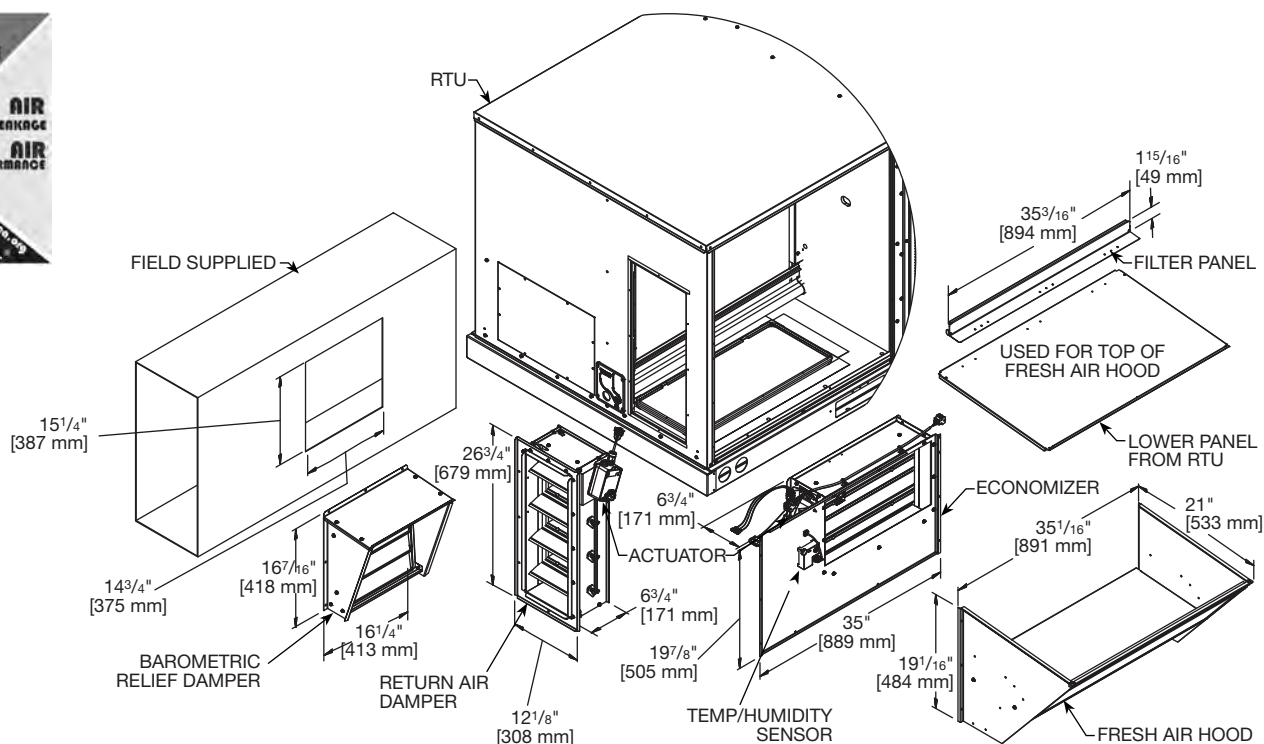

[ ] Designates Metric Conversions

## NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) RRS ECONOMIZER WITH SIEMENS CONTROLS

### Field-Installed Only


#### RXRD-51MCHAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide.
3. Blade edge seals shall be Ruskiprene type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. Controls feature the Siemens controller and actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01).

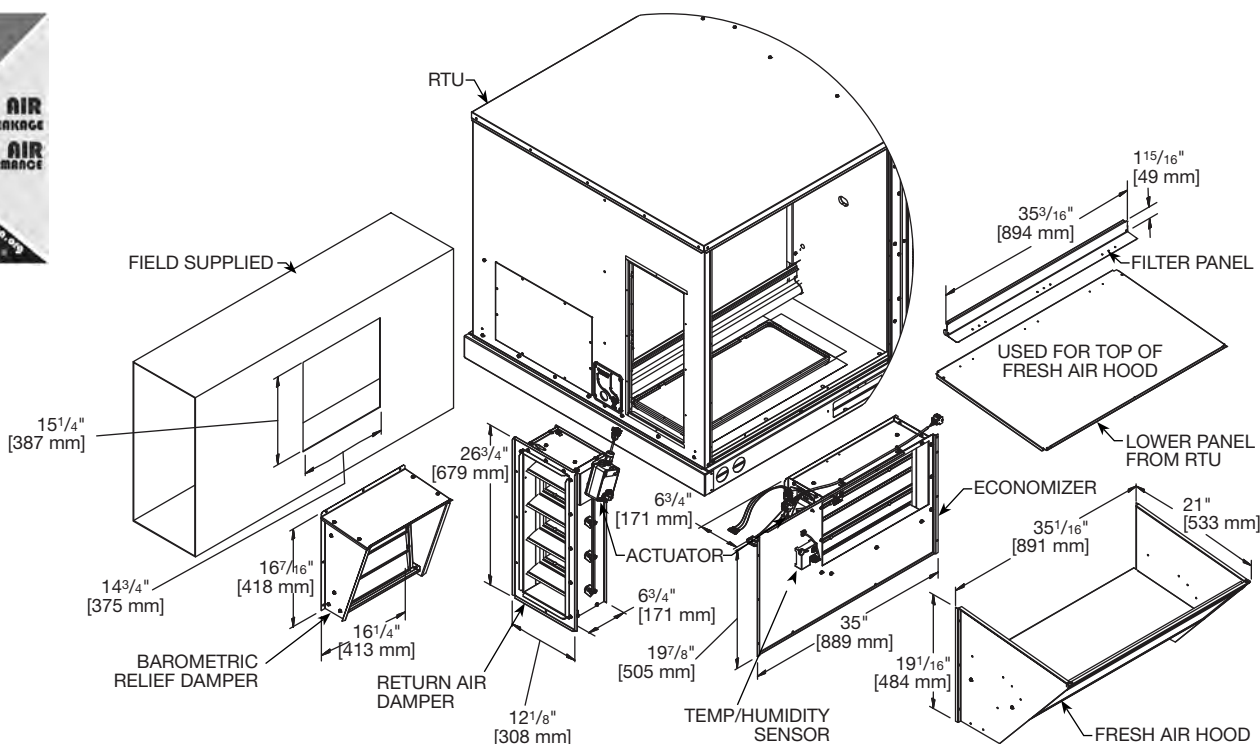

[ ] Designates Metric Conversions

## ECONOMIZER UNIVERSAL DDC INTERFACE KIT


### Factory or Field-Installed

#### RXXRX-DDC01


- Allows any Non-DDC Economizer to be used with a ClearControl DDC model
- Mounts on the Economizer
- Provides Mounting location for Economizer Controller
- Provides wire management for excess wire

**NOTE:** Older DDC Models, prior to A2L, may require a field update to the ClearControl Software. The minimum version required is 3.15. Models with R-454B refrigerant come with software version 4.0 or higher.

#### HORIZONTAL FLOW DDC BRACKET SETUP

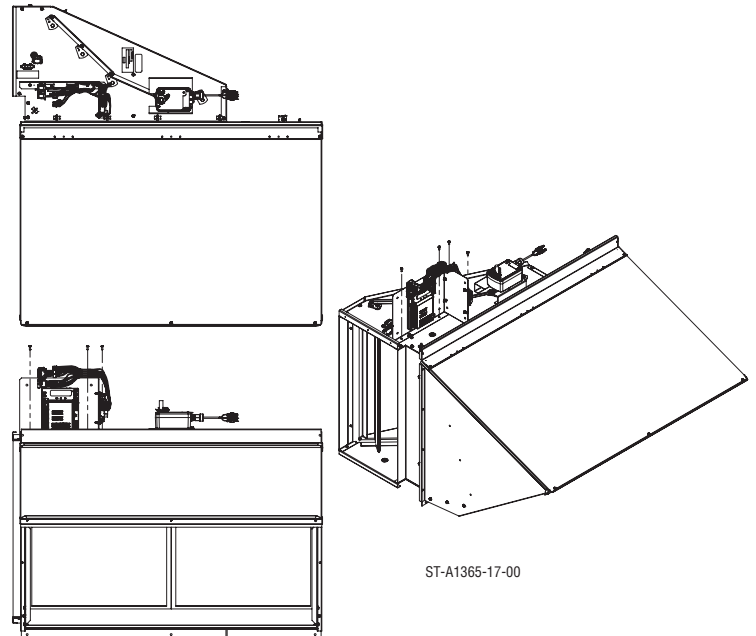

#### DOWNFLOW ECONOMIZER DDC BRACKET SETUP

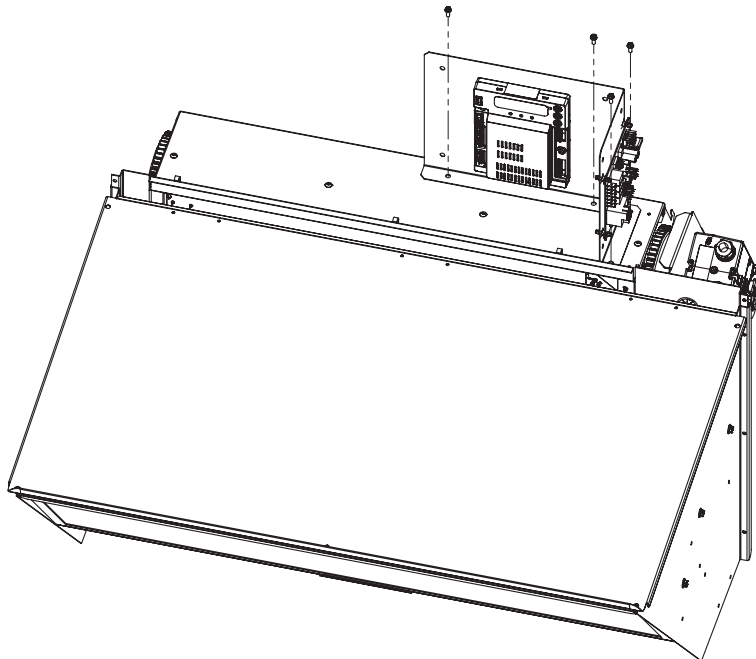





## FRESH AIR DAMPER

### RXRF-ACA1—Manual Damper Kit

#### DOWNFLOW APPLICATION

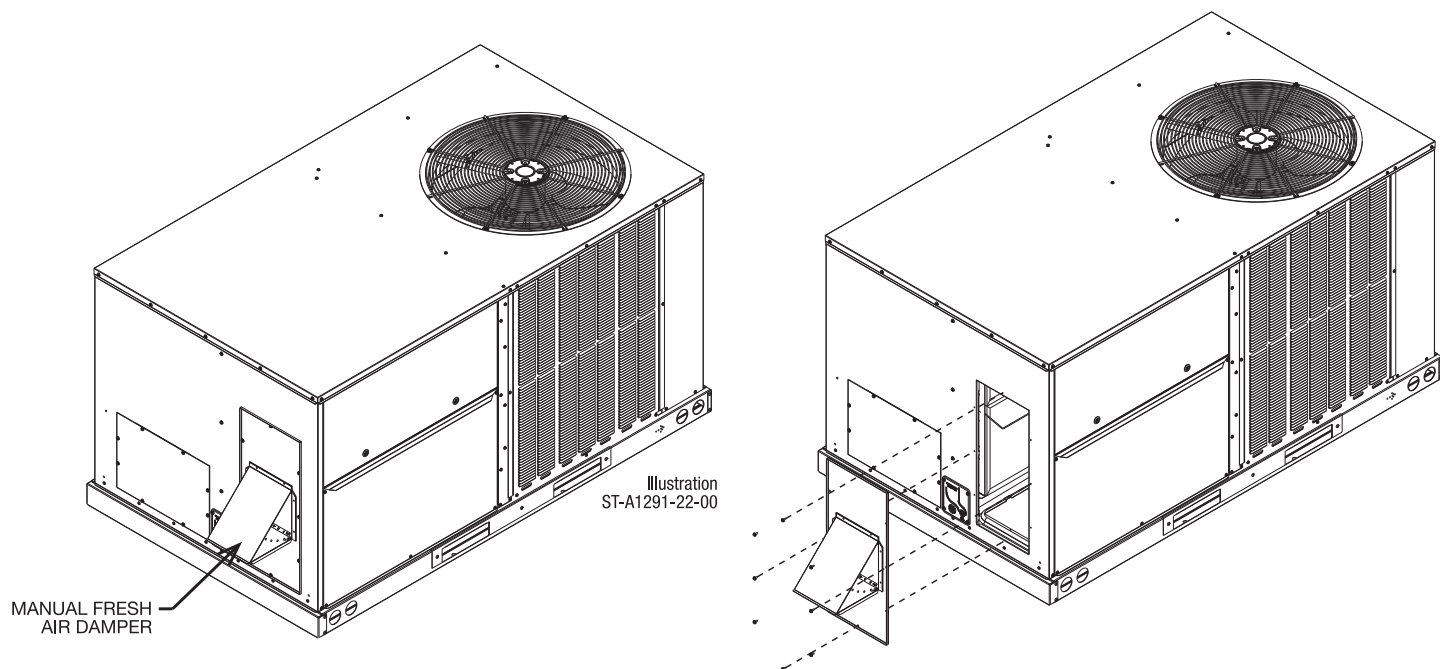


#### HORIZONTAL APPLICATION

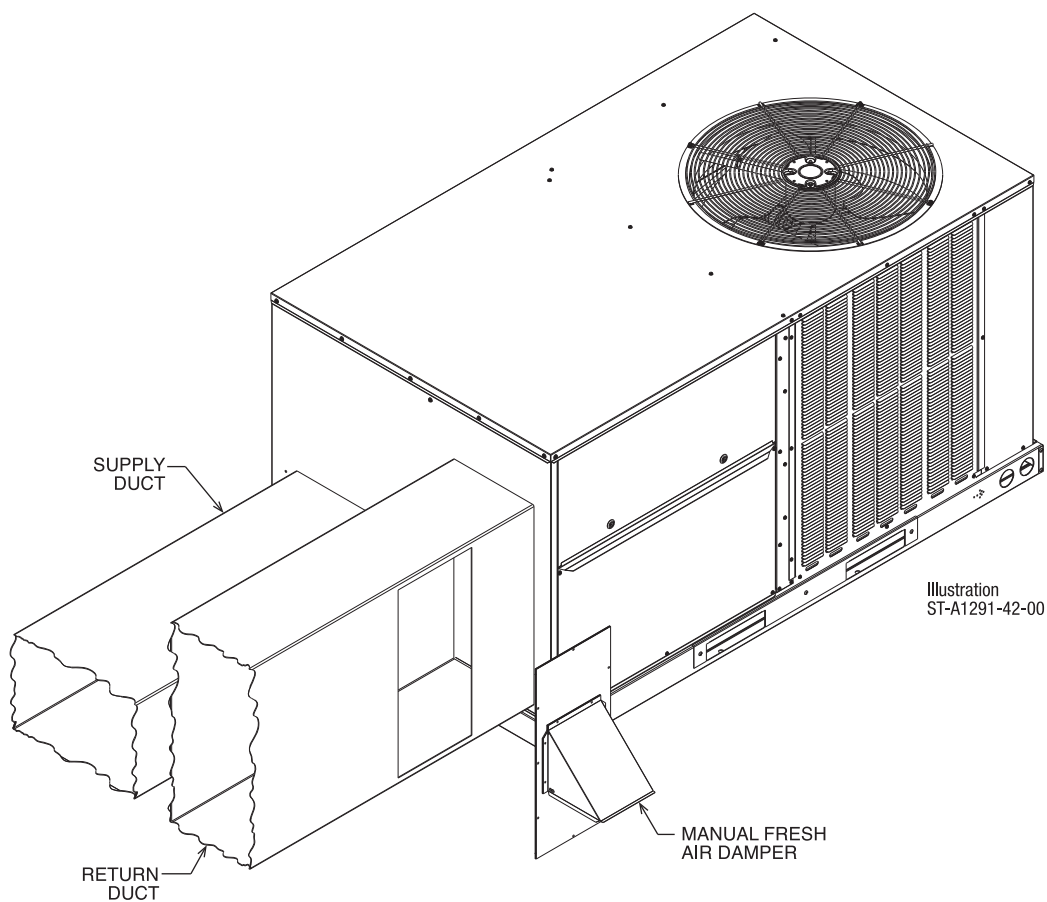


## FRESH AIR DAMPER

### RXRF-ACB1 – Motorized Damper Kit

- Features **Siemens** Actuator
- Gear Driven Direct Drive Actuator
- Adjustable to 2 positions
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin and 4-pin Electrical Connections
- Pre-Configured – No Field Adjustments Necessary

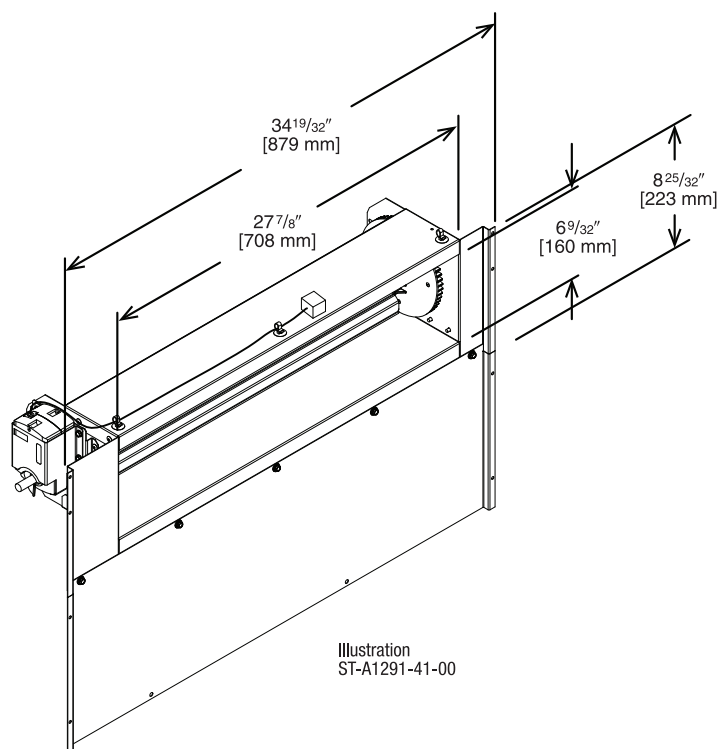

[ ] Designates Metric Conversions

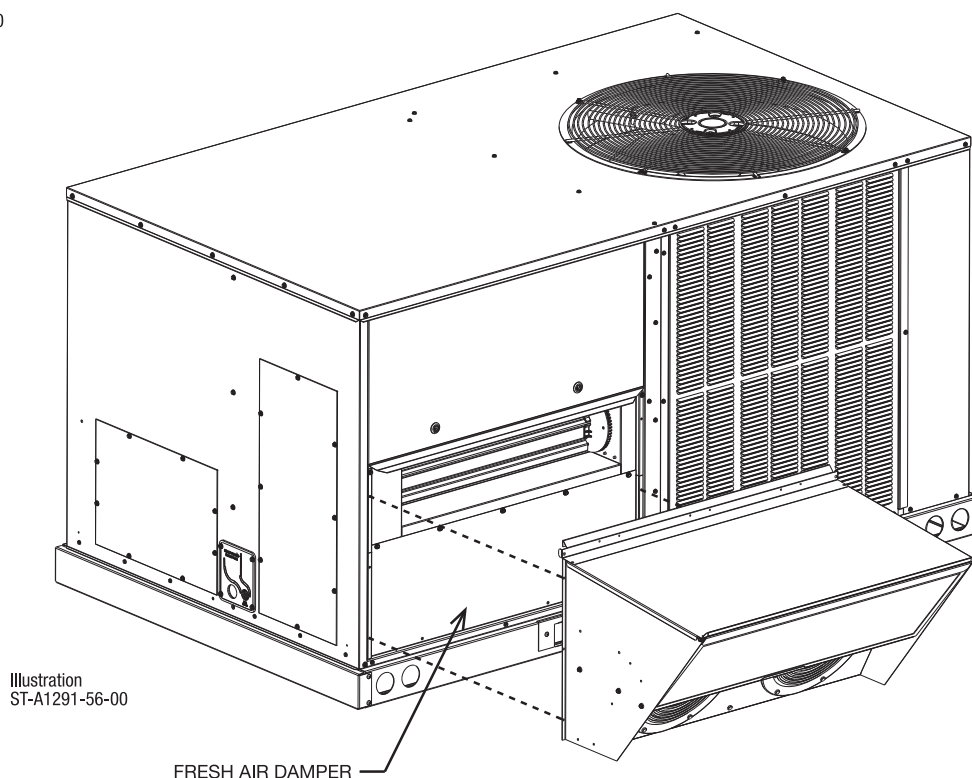




POWER EXHAUST KIT FOR ECONOMIZERS

RXRX-CCF02\*

\*Voltage Code: C or D


VERTICAL AIRFLOW

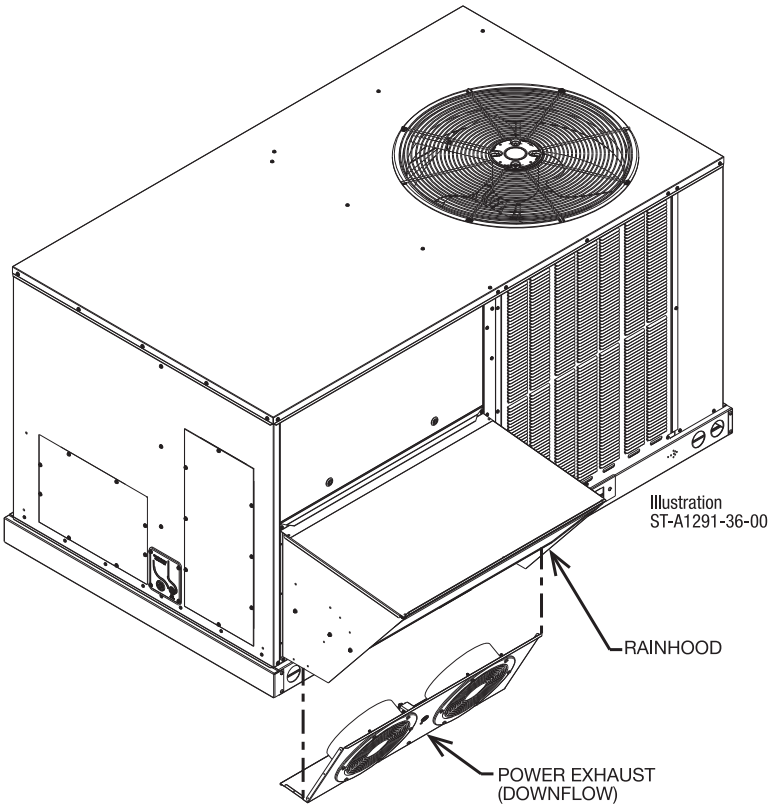

RXRX-CCF03\*

\*Voltage Code: C or D

HORIZONTAL AIRFLOW

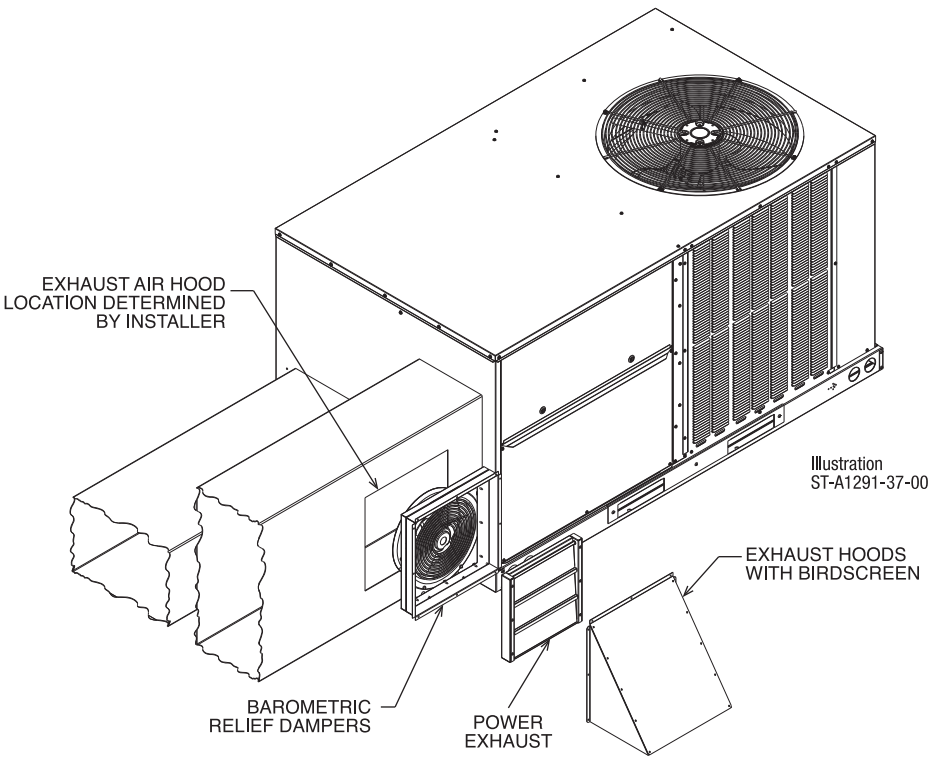

| Model No.   | No. of Fans | Volts   | Phase | HP (ea.) | CFM [L/s]* | RPM  | FLA (ea.) | LRA (ea.) |
|-------------|-------------|---------|-------|----------|------------|------|-----------|-----------|
| RXRX-CCF0*C | 2           | 208/230 | 1     | 0.47     | 2200       | 3000 | 1.55      | 1.1       |
| RXRX-CCF0*D | 2           | 460     | 3     | 0.40     | 1970       | 2750 | 0.51      | 1.9       |

\*CFM is per fan at 0" w.c. external static pressure.


[ ] Designates Metric Conversions

## POWER EXHAUST KIT FOR DOWNFLOW ECONOMIZERS

### RXXRX-RCF02\*

\*Voltage Code: C, D, or Y

- Shipped completely assembled
- All wiring from control box to economizer is supplied
- Color coordinated with the unit
- Fully insulated with 1" 1.5 lb. fiberglass insulation
- Motors are factory wired and tested
- **Economizer Sold Separately**
- When using this power exhaust system, clearance between the bottom of the unit and the finished roof deck should be a minimum of 10 inches. Some applications may require a taller roofcurb for proper installation.

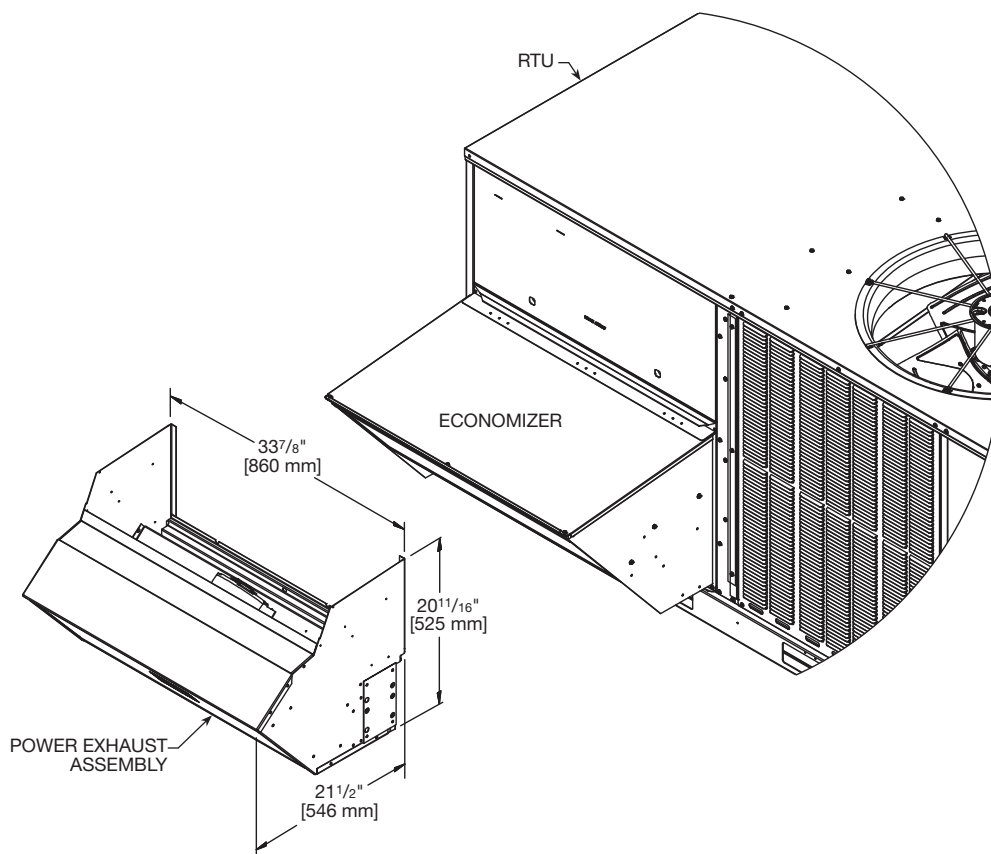

[ ] Designates Metric Conversions


| Model No.    | Volt    | Phase | Motor |      |      |      | Unit      |      |      |           | @ 0.1<br>CFM |
|--------------|---------|-------|-------|------|------|------|-----------|------|------|-----------|--------------|
|              |         |       | HP    | RPM  | LRA  | Qty. | Cir. Qty. | FLA  | MCA  | Fuse Size |              |
| RXXRX-RCF02C | 208/230 | 1     | 1/2   | 1625 | 5.86 | 1    | 1         | 2.70 | 3.38 | 6         | 1989         |
| RXXRX-RCF02D | 460     |       |       |      | 3.33 |      |           | 1.34 | 1.68 | 3         |              |
| RXXRX-RCF02Y | 575     |       |       |      | 2.52 |      |           | 1.06 | 1.33 | 2         |              |

# POWER EXHAUST KIT FOR HORIZONTAL ECONOMIZERS

## RXRX-RCF03\*

\*Voltage Code: C, D, or Y

- Shipped completely assembled
- All wiring from control box to economizer is supplied
- Color coordinated with the unit
- Fully insulated with 1" 1.5 lb. fiberglass insulation
- Motors are factory wired and tested
- **Economizer with Relief Hood Sold Separately**
- When using this power exhaust system, clearance between the bottom of the unit and the finished roof deck should be a minimum of 10 inches. Some applications may require a taller roofcurb for proper installation.

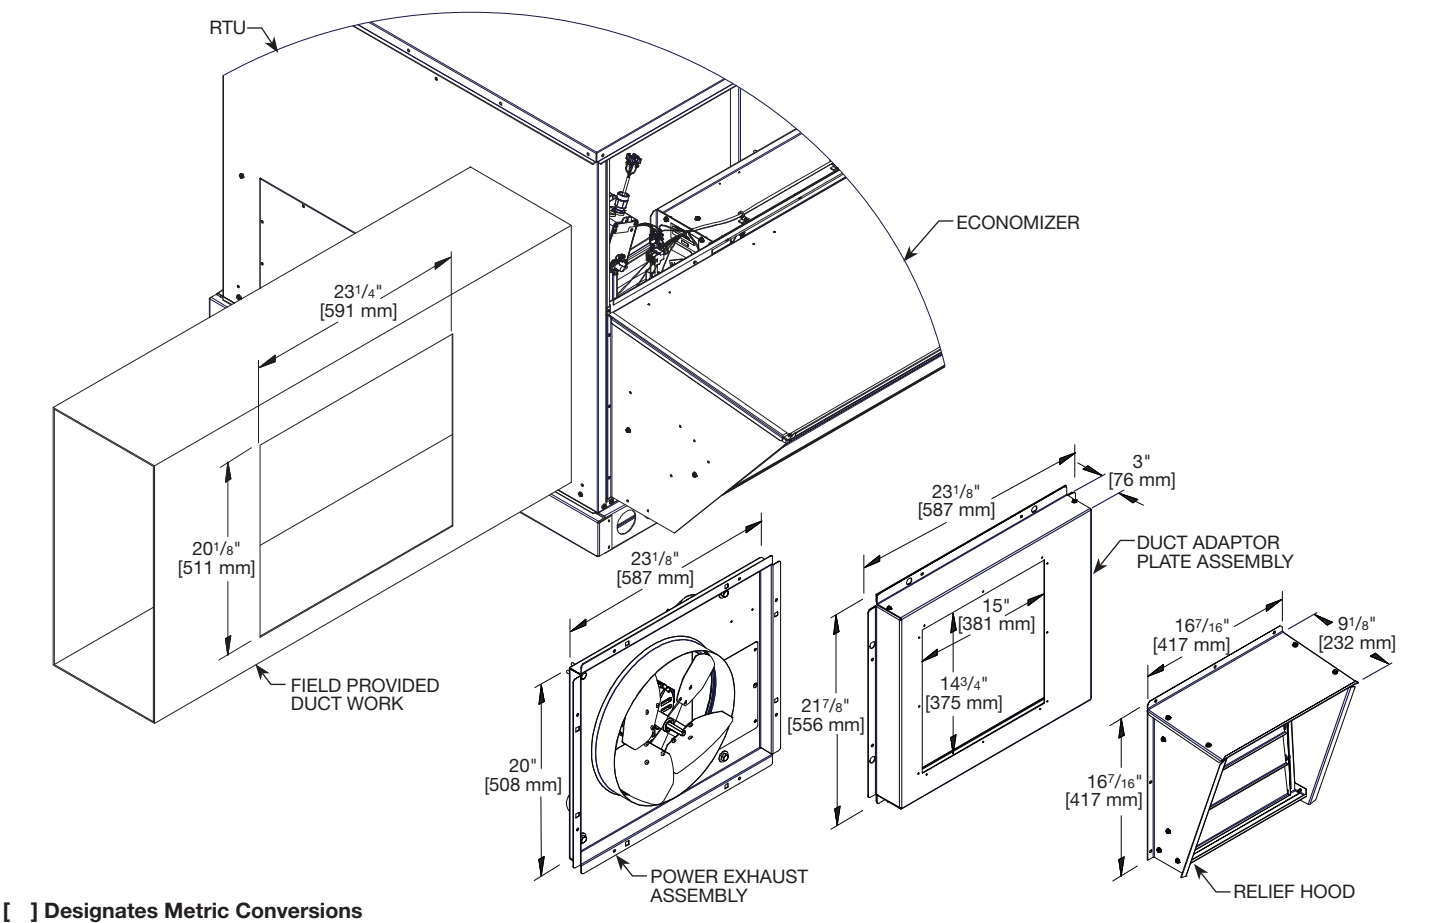


[ ] Designates Metric Conversions

| Model No.   | Volt    | Phase | Motor |      |      |      | Unit      |      |      |           | @ 0.1 CFM |
|-------------|---------|-------|-------|------|------|------|-----------|------|------|-----------|-----------|
|             |         |       | HP    | RPM  | LRA  | Qty. | Cir. Qty. | FLA  | MCA  | Fuse Size |           |
| RXRX-RCF03C | 208/230 | 1     | 1/2   | 1625 | 5.86 | 1    | 1         | 2.70 | 3.38 | 6         | 2013      |
| RXRX-RCF03D | 460     |       |       |      | 3.33 |      |           | 1.34 | 1.68 | 3         |           |
| RXRX-RCF03Y | 575     |       |       |      | 2.52 |      |           | 1.06 | 1.33 | 2         |           |

## ROOFCURBS (Full Perimeter)

- The roofcurb design can be utilized on all 3-6 Ton RACC models
- Two available heights (14" [356 mm] and 24" [610 mm]) for ALL models
- Quick assembly corners for simple and fast assembly
- Opening provided in bottom pan to match the "Thru the Curb" electrical, gas piping, condensate, connection opening provided on the unit base pan
- 1" [25 mm] x 4" [102 mm] Nailer provided
- Sealing gasket (40' [12.2 m]) provided with Roofcurb
- Packaged for easy field assembly

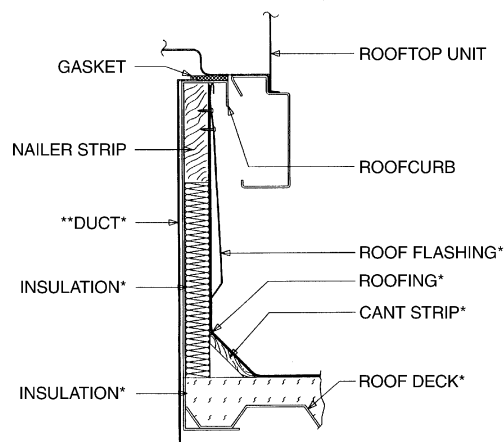

\*BY CONTRACTOR  
\*\*FOR INSTALLATION OF DUCT AS SHOWN, USE RECOMMENDED DUCT SIZES FROM ROOFCURB INSTALLATION INSTRUCTIONS. FOR DUCT FLANGE ATTACHMENT TO UNIT, SEE UNIT INSTALLATION INSTRUCTIONS FOR RECOMMENDED DUCT SIZES.

Illustration  
ST-A0743-02

| View | Roofcurb Model | Height of Curb |
|------|----------------|----------------|
| A    | RXKG-DCC14     | 14" [356 mm]   |
| A    | RXKG-DCC24     | 24" [610 mm]   |

## ROOFCURB INSTALLATION

### VIEW A


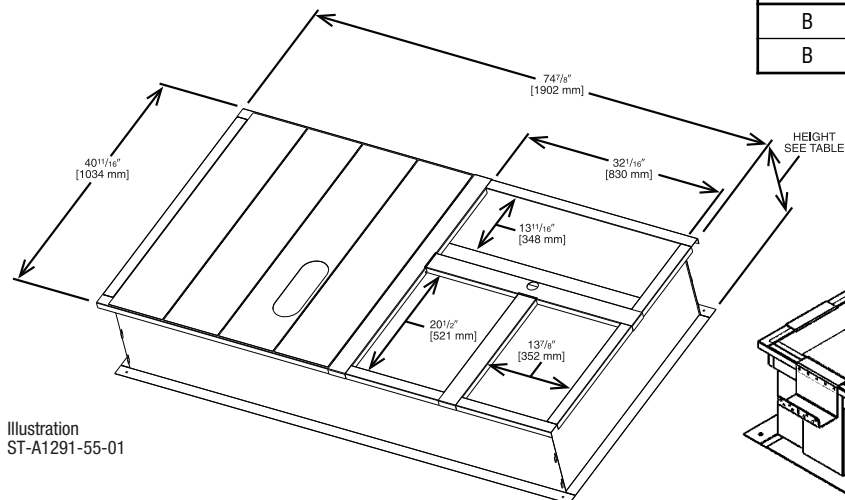


Illustration  
ST-A1291-55-01

| View | Roofcurb Model | Dimensions                |
|------|----------------|---------------------------|
| B    | RXKG-DC14      | 74.875" x 40.688" x 14.0" |
| B    | RXKG-DC24      | 74.875" x 40.688" x 24.0" |

### WELDED ROOFCURB VIEW B

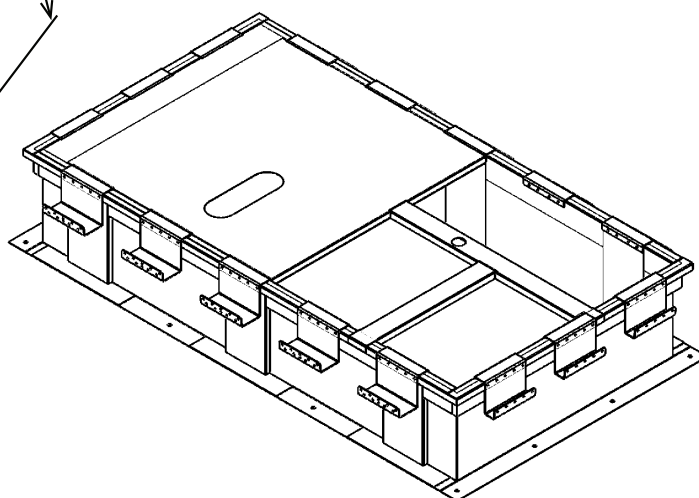


- State of Florida Approved: Approval Number FL 26981 for Technical Evaluation Report TER-20-28788 certifies the HVAC Unit and mounting methods for high wind resistance are compliant per Florida Building Code.

[ ] Designates Metric Conversions

ROOFCURB ADAPTERS (CONTINUED)

RXXR-DCCAE

- This roofcurb adapter fits the previous generation footprint (for example, RKNL, RLRL, RJNL series).

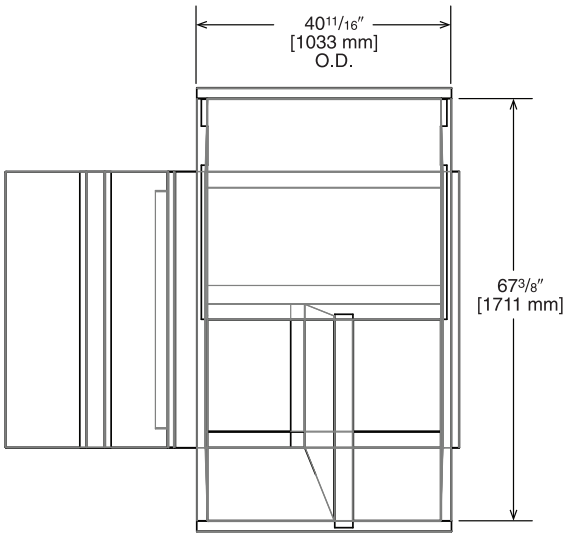

| Approximate Static Pressure Drop |
|----------------------------------|
| @1200 CFM = 0.05" w.g.           |
| @2000 CFM = 0.19" w.g.           |


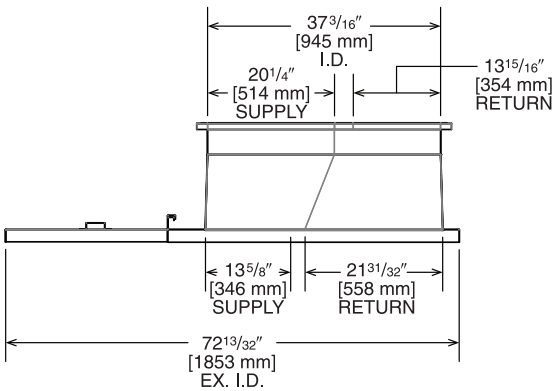


Illustration  
ST-A1291-44-00

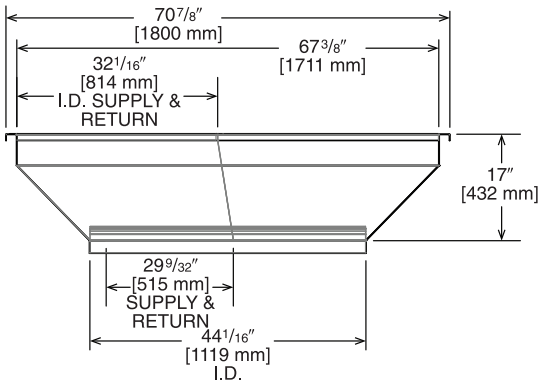

TOP VIEW

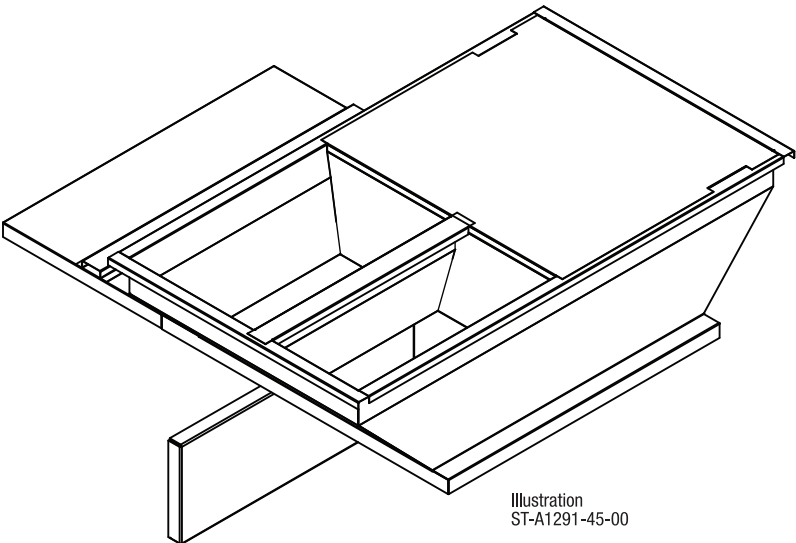


Illustration  
ST-A1291-45-00

[ ] Designates Metric Conversions

## Guide Specifications RACC-036-072

You may copy this document directly into your building specification. This specification is written to comply with the 2016 version of the “master format” as published by the Construction Specification Institute. [www.csinet.org](http://www.csinet.org).

### ELECTRIC HEAT PACKAGED ROOFTOP

#### HVAC Guide Specifications

#### Size Range: 3 to 6 Nominal Tons

##### 1.00 General:

- A. Outdoor, rooftop mounted, electrically controlled, heating and cooling unit utilizing a(n) hermetic scroll compressor(s) for cooling duty and heat pump for heating duty.
- B. Factory assembled, single-piece heating and cooling rooftop unit. Contained within the unit enclosure shall be all factory wiring, piping, controls, and special features required prior to field start-up.
- C. Unit shall use environmentally safe, R-454B refrigerant.
- D. Unit shall be installed in accordance with the manufacturer’s instructions.
- E. Unit must be selected and installed in compliance with local, state, and federal codes.

##### 1.01 Quality Assurance:

- A. Unit meets ASHRAE 90.1 2022 minimum efficiency requirements.
- B. Unit shall be rated in accordance with AHRI Standards 210/240 or 340/360 and 10 CFR appendix M1 to subpart B or part 430.
- C. Unit shall be designed to conform to ASHRAE 15.
- D. Unit shall be UL-tested and certified in accordance with Standards and UL-listed and certified under Canadian standards as a total package for safety requirements.
- E. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
- F. Unit casing shall be capable of withstanding 1000-hour salt spray exposure per ASTM B117 (scribed specimen).
- G. Roof curb shall be designed to conform to NRCA Standards.
- H. Unit shall be subjected to a completely automated run test on the assembly line. The data for each unit will be stored at the factory, and must be available upon request.
- I. Unit shall be designed in accordance with UL Standard 60335-2-40 4th Edition. including tested to withstand rain.

##### 1.02 Manufacturer Qualifications

- A. Unit shall be designed in accordance with ISO 9001:2015, and shall be manufactured in a facility registered by ISO 9001:2015.

##### 1.03 Installer Qualifications

- A. The installer shall be trained to install and service equipment with A2L refrigerants.

##### 1.04 Delivery, Storage, and Handling:

- A. Unit shall be stored and handled per manufacturer’s recommendations.
- B. Lifted by crane requires either shipping top panel or spreader bars.
- C. Unit shall only be stored or positioned in the upright position.

##### 1.05 Unit Cabinet:

- A. Unit cabinet shall be constructed of galvanized steel.
- B. Unit cabinet exterior paint shall be: pre-painted steel.
- C. Evaporator fan compartment interior cabinet insulation shall conform to AHRI Standards 210 or 360 minimum exterior sweat criteria. Interior surfaces shall be insulated with a minimum 1/2-in. thick, 1.6 lbs. density, flexible fiberglass insulation, foil faced on the air side. Aluminum foil-faced fiberglass insulation shall be used in the gas heat compartment.
- D. Base of unit shall have a location for thru-the-base gas and electrical connections standard.
- E. Base Rail:
  - i. Unit shall have base rails on a minimum of 4 sides.
  - ii. Holes shall be provided in the base rails for rigging shackles to facilitate maneuvering and overhead rigging.
  - iii. Holes shall be provided in the base rail for moving the rooftop for fork truck.
  - iv. Base rail shall be a minimum of 14 gauge thickness.

- F. Condensate pan and connections:
  - i. Shall be a sloped condensate drain pan made of a non-corrosive material and be removable for cleaning.
  - ii. Shall comply with ASHRAE Standard 62.
  - iii. Shall use a 3/4" NPT drain connection, possible either through the bottom or side of the drain pan. Connection shall be made per manufacturer's recommendations.
  - iv. Shall be able to be easily removed.
- G. Top panel
  - i. Shall be a single piece top panel over indoor section.
- H. Electrical Connections:
  - i. All unit power wiring shall enter unit cabinet via a single, factory-prepared, continuous raised flange opening in the basepan.
  - ii. Thru-the-base capability:
    - a. Standard unit shall have a thru-the-base electrical location(s) using a raised, continuous raised flange opening in the basepan.
    - b. No basepan penetration, other than those authorized by the manufacturer, is permitted.
- I. Component access panels (standard):
  - i. Cabinet panels shall be easily opened for servicing.
  - ii. Panels covering control box, indoor fan, indoor fan motor, gas components (where applicable), and filters shall have hinges with 1/4 turn fasteners on units with factory-installed hinged option.
  - iii. 1/4 fasteners shall be permanently attached.

**1.06 Operating Characteristics:**

- A. Unit shall be capable of starting and running at 115°F (46°C) ambient outdoor temperature, meeting maximum load criteria of AHRI Standard 210/240 or 340/360 at ± 10% voltage.
- B. Compressor with standard controls shall be capable of operation down to 50°F (10°C), ambient outdoor temperatures. Low ambient accessory kit is necessary if mechanically cooling at ambient temperatures to 0°F (-17.7°C).
- C. Unit shall discharge supply air vertically or horizontally as shown on contract drawings.
- D. Unit shall be factory configured for vertical supply & return configurations.
- E. Unit shall be field convertible from vertical to horizontal configuration.

**1.07 Electrical Requirements**

- A. Main power supply voltage, phase, and frequency must match those required by the manufacturer.

**1.08 Evaporator fan compartment:**

- A. Interior cabinet surfaces shall be insulated with a minimum 1/2-in. thick, minimum 1.6 LB density, flexible fiberglass insulation bonded with foil face on the air side.
- B. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
- C. Insulation shall also be mechanically fastened with welded pin and retainer washer.

**1.09 Thermostats**

- A. Thermostat must:
  - i. Energize both "W" and "G" when calling for heat.
  - ii. Have capability to energize 1 stage of cooling, and at least 1 stage of heating.
  - iii. Include capability for occupancy scheduling.

**1.10 Electronic Control System for HVAC:**

- A. Shall be complete with self-contained low-voltage control circuit protected by a fuse on the 24-V transformer side.
- B. Shall utilize color-coded wiring.
- C. Unit shall include a self-contained low-voltage control circuit protected by a fuse on the 24-V transformer side.
- D. Unit shall include a minimum of one 8-pin screw terminal connection board for connection of control wiring.

**1.11 Safeties:**

- A. Compressor over-temperature, over current.
- B. Low-pressure switch.
  - i. Units shall have low pressure, loss of charge automatic reset device that will shut off compressor when tripped.
- C. High-pressure switch.
  - i. Unit shall be equipped with high pressure switch device that will shut off compressor when tripped.



- D. Automatic reset, motor thermal overload protector.
- E. The unit must be permanently grounded.
- F. Components are not compatible between different refrigerants. Do not use R-410A service equipment or components on R-454B equipment. System or part failure could occur.

**1.12 Standard Filter Section:**

- A. Shall consist of factory-installed, low velocity, throwaway 2-in. thick fiberglass filters of commercially available sizes.
- B. Unit will accept both 2-in. and 4-in. filters.
- C. Filter face velocity shall not exceed 365 fpm at nominal airflows.
- D. Filters shall be accessible through an access panel with “no-tool” removal as described in the unit cabinet section of the specification.
- E. Filters access is specified in the unit cabinet section of this specification.
- F. Filters shall be held in place by metal rods, facilitating easy removal and installation.

**1.13 Coils**

- A. Standard Aluminum/MicroChannel Coils:
  - i. Standard evaporator and condenser coils shall be aluminum.
  - ii. Evaporator and condenser coils shall be leak tested to 150 psig, pressure tested to 400 psig, and qualified to burst test at 2,200 psi.

**1.14 Refrigerant Components:**

- A. Refrigerant circuit shall include the following control, safety, and maintenance features:
  - i. TXV metering system shall prevent mal-distribution of two-phase refrigerant.
  - ii. Refrigerant filter drier.
  - iii. Service gauge connections on suction and discharge lines.
  - iv. External pressure gauge ports access shall be located in front exterior of cabinet.
- B. Compressors:
  - i. Unit shall use one fully hermetic scroll compressor.
  - ii. 3-5 ton RACCYB units include one single-stage compressor.
  - iii. 3-5 ton RACCYC and 6 ton RACCYB units include one two-stage compressor.
  - iv. Compressor motors shall be cooled by refrigerant gas passing through motor windings.
  - v. Compressors shall be internally protected from high discharge temperature conditions.
  - vi. Compressors shall be protected from an over-temperature and over-ampereage conditions by an internal, motor overload device.
  - vii. Compressor shall be factory mounted on rubber grommets.
  - viii. Compressor motors shall have internal line break thermal and current overload protection.
  - ix. Crankcase heaters shall not be required for normal operating range.
  - x. Compressor shall have molded electrical plug.

**1.15 Evaporator Fan and Motor:**

- A. Evaporator Fan Motor:
  - i. Shall have permanently lubricated bearings.
  - ii. Shall have inherent automatic-reset thermal overload protection.
- B. Direct Drive Evaporator Fan:
  - i. Direct drive ECM technology with (5) dedicated speed selections as follows: fan, low, high, AC low static, AC high static.
  - ii. Blower fan shall be double-inlet type with forward-curved blades.
  - iii. Shall be constructed from steel with a corrosion resistant finish and dynamically balanced.

**1.16 Condenser Fans and Motors:**

- A. Condenser Fan Motor:
  - i. Shall be a totally enclosed motor.
  - ii. Shall use permanently lubricated bearings.
  - iii. Shall have inherent thermal overload protection with an automatic reset feature.
  - iv. Shall use a shaft-down design. Shaft-up designs including those with “rain-slinger devices” shall not be allowed.

- B. Condenser Fans shall:
  - i. Shall be a direct-driven propeller type fan
  - ii. Shall have blades riveted to corrosion-resistant steel spiders and shall be dynamically balanced.

**1.17 Special Features:**

- A. Integrated Economizers:
  - i. Integrated parallel modulating blade design type capable of simultaneous economizer and compressor operation.
  - ii. Independent modules for vertical or horizontal return configurations shall be available. Vertical return modules shall be available as a factory-installed option.
  - iii. Damper blades shall be galvanized steel. Plastic or composite blades on intake or return shall not be acceptable.
  - iv. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below setpoints.
  - v. Shall be equipped with dampers for both the outdoor ventilation air and the return air for positive air stream control.
  - vi. Shall be equipped with low-leakage dampers, not to exceed 2% leakage at 1 in. wg pressure differential.
  - vii. Shall be capable of introducing up to 100% outdoor air.
  - viii. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air.
  - ix. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.
  - x. Enthalpy sensor shall be provided as standard. Outdoor air sensor set point shall be adjustable and shall range from 40 to 100°F / 4 to 38°C. Additional sensor options shall be available as accessories.
  - xi. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 70%, with a range of 0% to 100%.
  - xii. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy. A remote potentiometer may be used to override the damper set point.
  - xiii. Dampers shall be completely closed when the unit is in the unoccupied mode.
  - xiv. Economizer controller shall accept a 2-10Vdc CO<sub>2</sub> sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor-air damper to provide ventilation based on the sensor input.
  - xv. Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
  - xvi. Economizer wire harness will have provision for smoke detector.
- B. Manual damper
  - i. Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 50% outdoor air for year-round ventilation.
- C. Condenser Coil Hail Guard Assembly:
  - i. Shall protect against damage from hail.
  - ii. Shall be louvered style.
- D. Unit-Mounted, Non-Fused Disconnect Switch:
  - i. Switch shall be factory-installed, internally mounted.
  - ii. National Electric Code (NEC) and UL approved non-fused switch shall provide unit power shutoff.
  - iii. Shall be accessible from outside the unit.
  - iv. Shall provide local shutdown and lockout capability.
- E. Convenience Outlet:
  - i. Non-Powered convenience outlet.
  - ii. Outlet shall be powered from a separate 115-120v power source.
  - iii. A transformer shall not be included.
  - iv. Outlet shall be field-installed and internally mounted with easily accessible 115-v female receptacle.
  - v. Outlet shall include 15 amp GFI receptacle with independent fuse protection.
  - vi. Outlet shall be accessible from outside the unit.

- F. Propeller Power Exhaust:
  - i. Power exhaust shall be used in conjunction with an integrated economizer.
  - ii. Independent modules for vertical or horizontal return configurations shall be available.
  - iii. Horizontal power exhaust shall be mounted in return ductwork.
  - iv. Power exhaust shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0-100% adjustable setpoint on the economizer control.
- G. Roof Curbs (Vertical):
  - i. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.
  - ii. Permits installation and securing of ductwork to curb prior to mounting unit on the curb.
- H. Return Air Enthalpy Sensor
  - i. The return air enthalpy sensor shall be used in conjunction with an outdoor air enthalpy sensor to provide differential enthalpy control.
- I. Indoor Air Quality (CO<sub>2</sub>) Sensor:
  - i. Shall be able to provide demand ventilation indoor air quality (IAQ) control.
  - ii. The IAQ sensor shall be available in duct mount, wall mount, or wall mount with LED display. The set point shall have adjustment capability.
- J. Smoke detectors:
  - i. Shall be a Four-Wire Controller and Detector.
  - ii. Shall be environmental compensated with differential sensing for reliable, stable, and drift-free sensitivity.
  - iii. Shall use magnet-activated test/reset sensor switches.
  - iv. Shall have tool-less connection terminal access.
  - v. Shall have a recessed momentary switch for testing and resetting the detector.
  - vi. Controller shall include:
    - a. One set of normally open alarm initiation contacts for connection to an initiating device circuit on a fire alarm control panel
    - b. Two Form-C auxiliary alarm relays for interface with rooftop unit or other equipment
    - c. One Form-C supervision (trouble) relay to control the operation of the Trouble LED on a remote test/reset station
    - d. Capable of direct connection to two individual detector modules.
    - e. Can be wired to up to 14 other duct smoke detectors for multiple fan shutdown applications.
- K. Barometric Relief:
  - i. Shall include damper, seals, hard-ware, and hoods to relieve excess building pressure.
  - ii. Damper shall gravity-close upon shutdown.
- L. Time Guard:
  - i. Shall prevent compressor short cycling by providing a 5-minute delay ( $\pm 2$  minutes) before restarting a compressor after shutdown for any reason.
  - ii. One device shall be required per compressor.
- M. Refrigerant Leak Detection System:
  - i. Shall be standard and factory-installed in every unit.
  - ii. Shall trigger a fault code to the unit controller and initiate mitigation procedures.



**FRIEDRICH**

1 8 8 3

## GENERAL TERMS OF LIMITED WARRANTY\*

Friedrich® will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

**\*For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

### Compressor

Commercial Applications .....Five (5) Years  
Residential Applications  
[3 to 5 ton models only] .....Ten (10) Years

### Parts

Commercial Applications .....One (1) Year  
Residential Applications (Registration Required)  
[3 to 5 ton models only] .....Ten (10) Years

**Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.**

© 2025 Rheem Manufacturing Company. Trademarks are property of their respective owners.

In keeping with its policy of continuous progress and product improvement, manufacturer reserves the right to make changes without notice.

5600 Old Greenwood Road  
Fort Smith, Arkansas 72908 • Friedrich.com

125 Edgeware Road, Unit 1  
Brampton, Ontario • L6Y 0P5